SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Switch complete for SUPRABEAM Q1mini	995.0007	5704049900264
Ĩ	Pocket clip for Q1mini	995.0085	5704049904798





Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S Dyssen 3 DK-8200 Aarhus N. Denmark

Phone: +45 87 525 212 www.suprabeam.com info@suprabeam.com





10° - 70°



KEY FEATURES / UNIQUE SELLING POINTS (USP)

PACKAGING



ROTATING HYPERFOCUS

The rotating Hyperfocus[™] lets you go from flood to spot with a light turn of the lamphead. Control the focus with two fingers and switch quickly from 10 degrees to 70 degrees.



INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers switching between high and low light power by a simple switch operation. In addition, it controls the light output for an optimized battery lifetime.



WATER RESISTANT - IPX4

The Q1mini is rated IPX4, which means it is water resistant. Use the Q1mini in all weather conditions without having to worry about your light.



PACKAGING

Customs Tariff Number:	
Packaging:	
Single Box Content / Size / Weight:	
Master Box Content / Size / Weight:	
Part. No.:	
EAN-CODE:	

SPECIFICATIONS

LED / Focus Configuration:	
Case Material / Surface Treatment:	
Case Color:	
Switch at Rear:	
Dimensions:	
Weight incl. Battery:	
Ingress Protection Rating:	
Temperature (Operation):	

ELECTRONICS

Built in Controller:	
Standard Power Source:	
Compatible with Rechargeable Cells:	
Beam / Distance:	
Luminous Flux:	
Lighting Time:	
Accessories Included:	



ATTACHMENT CLIP


With the Q1mini attachment clip and the convenient size the Q1mini is perfect for carrying in your pocket. The attachment clip secures the Q1mini in your pocket and makes it easy to reach with a quick grasp.



TOUCH SWITCH


The endcap metal button is a switch with a task function, allowing you to step through the light modes without activating the lamp constantly. The different light functions are provided by our Intelligent Light Control circuit.

LIGHT CURVE AND RUNTIMES

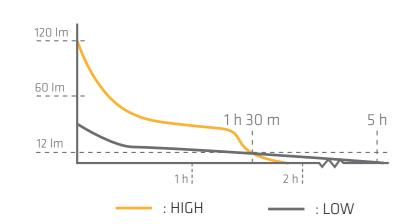









8513 1000

Recyclable Cardboard Packaging

1 pcs, height/width/depth: 12.5 x 6 x 2 cm / 78 g

27 pcs, height/width/depth: 15.2 x 19.5 x 19.5 cm / 2.3 kg

501.2011

5704049908192

1 CREE Power Chip / Rotating Hyperfocus™

Prime Aluminium quality 6061, anodized

Anthracite Dark Grey

Quality Tested Metal Switch With Touch Function

L: 98 mm, ø: 15 mm

38 g

Splash Waterproof IPx4

-20°C to +50°C

Yes, 2-step controller by press or touch

1 x AAA Alkaline

Yes, with AAA NiMh 1.2V

Variable from Spot to Floodlight / 60 Meters

High: 120 lm / Low: 30 lm

High: 1 h 30 min. / Low: 5 h

Attachment Clip & Keyring