



**CLASSIC-V VS. SUPER-V:**  
What's the difference? We've drawn on decades of rack mount case experience to produce two tiers of performance.

The Pelican-Hardigg™ Classic-V Series has a 33" (838 mm) depth frame

and has longer shock mounts and a larger sway space between the rack and shell. This case also has 4 removable heavy-duty casters and stainless steel handles. Extra insurance if your equipment frequently ships via freight services.

The Pelican-Hardigg™ Super-V Series has a 24" (610 mm) deep frame and uses shorter shock mounts for compact case dimensions. This case uses edge casters - just grab the Comfort-Grip Handles and you're ready to roll.

**SHARED FEATURES**  
All Pelican-Hardigg™ Classic-V and Super-V Series are rated for equipment loads up to 77 kg. Mating columnar ribs create a rigid shell and also provide secure stacking of same-size cases.



You'll also find a manual purge valve, so air pressure in the case can be equalised to the atmosphere. This prevents vacuum-lock that can make opening the case difficult. Lids include a fully sealed

O-ring gasket that works with the purge valve to make the case fully watertight.

These features may seem extraordinary, but we've learned that water and electronics don't mix.

Look for detailed dimensions and features on the following pages and on [Peli.com/racks](http://Peli.com/racks)



**TO SEE THE FULL LINE OF RACK MOUNT CASES GO TO: [PELI.COM/RACKS](http://PELI.COM/RACKS)**



Classic Rack



SuperMac™



Mac Rack™



Black Box



ProRack™

NEW PELI-HARDIGG™ V-SERIES RACK MOUNT CASES



**IN STOCK AND READY TO ROCK**



**INTRODUCING PELI-HARDIGG™ V-SERIES**

THE OFF-THE-SHELF RACK MOUNT CASE WITH PRO-GRADE FEATURES. Gearing up for an event? Now you can get pro-grade rack mount cases straight away. The Pelican-Hardigg V-Series Cases are the perfect companion for the music, AV, entertainment, news and drones industry.



the clip nut onto a square hole and you've got a secure, threaded mount. We even ship the case with your choice of 10-32 Imperial or M6 Metric clip-nuts.

**ROTO MOULDED CASES**

**PELI 1 YEAR LIMITED GUARANTEE**

Pelican Products, S.L.U. ("Pelican") guarantees its rotomoulded containers will be free of defects in materials and workmanship for a period of one year from the date of purchase. This warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Pelican warrants against defects in materials and workmanship for a period of 90 days from the date of purchase. This warranty applies only to the original purchaser and is not transferable. To the extent permitted by law, Pelican's liability is limited to the case and not its contents. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

For complete warranty details, see [www.pelican.com/warranty](http://www.pelican.com/warranty)

©2016 Pelican Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Part. No. 0030-006-900E MAR. 16 [www.pelican.com](http://www.pelican.com)

Vonk B.V.  
Voorstraat 41 - 3265 BT PIERSHIL  
Tel. 088-0330300  
[info@vonkbv.com](mailto:info@vonkbv.com)  
[www.vonkbv.com](http://www.vonkbv.com)



PELI-HARDIGG™ 33" CLASSIC-V RACK MOUNT CASE



Stainless steel retractable handles



4 Removable heavy-duty bottom casters



Moulded Comfort Grip Handles are easy to use with gloves



Moulded in edge casters are always r allow case sta without r casters



Pelican-Hardigg™ V-Series Cases are built utilizing a full-boxed 19" (482 mm) steel rack with a industry-standard square hole pattern, so hanging electronics with tab mounts is a snap. These cases also include clip nuts- just attach

VIBRATION IS YOUR ENEMY. Drops and impact are an obvious no-no with electronics, but vibration puts damaging repetitive stress on delicate parts and soldered joints. That's why you'll find 8 heavy-duty rubber shock mounts to isolate the frame inside the shell. The polymer outer shell absorbs impacts, and the shock mount inside dissipates residual movement. Rack mount cases without shock mounts transfer impact forces directly to the electronics inside.




Specialist in professionele verpakingsoplossingen





# PELI-HARDIGG™ 33" CLASSIC-V RACK MOUNT CASE

FOR ULTRA FRAGILE EQUIPMENT

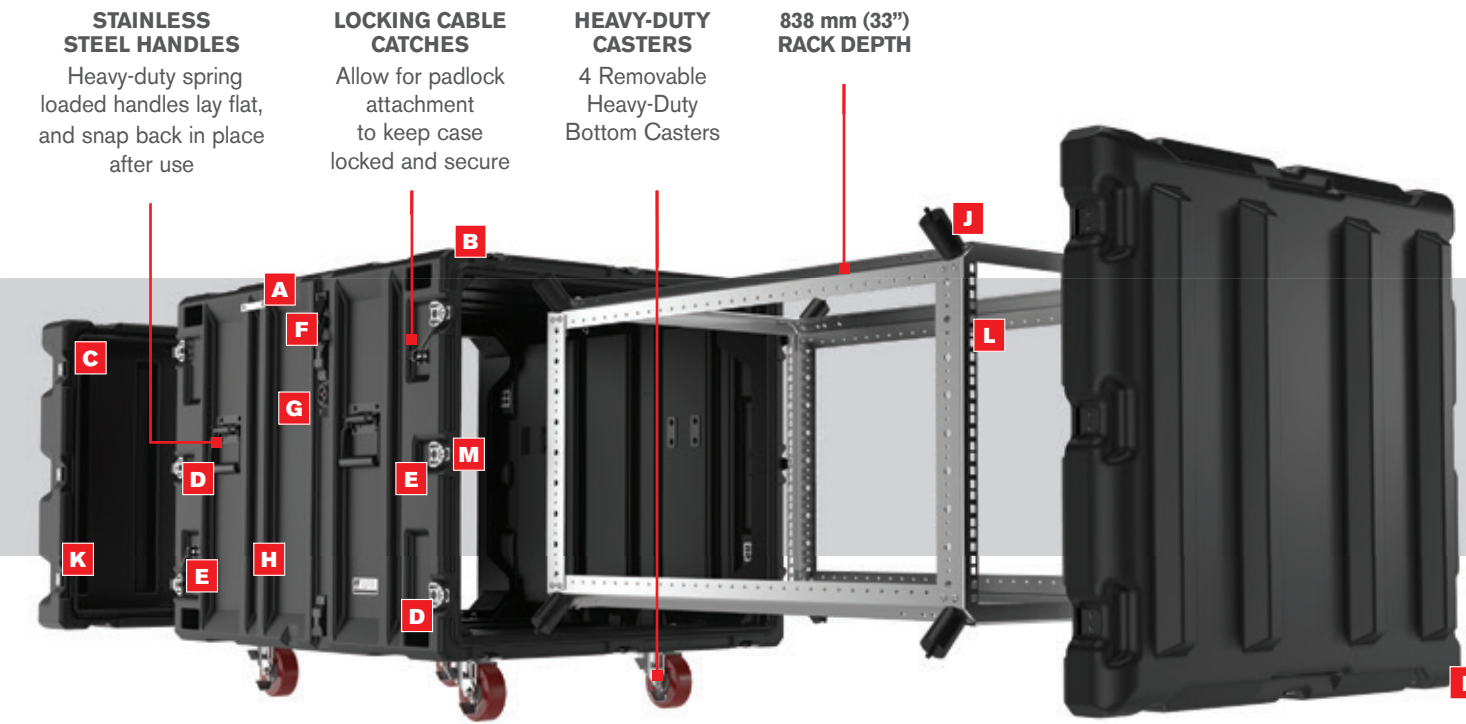

## SHARED FEATURES

### A: LID HANGER

Keeps lids attached to case while case is open

### B: MOLDED-IN STACKING RIBS

Secure non-slip stacking on matched size cases

### C: DOUBLE WALLED RIM FOR TONGUE-IN-GROOVE SEAL

Remains sealed after impact, splash, rain, air and watertight resistant

### D: POSITIVE ANTI-SHEAR LOCKS

Prevents lid separation upon impact

### E: BLACK HARDWARE

Non-reflective black hardware eliminates glare in bright environments

### F: COUPLING CATCHES

Attaching system for secure stacking

### G: PRESSURE RELEASE VALVE

Regulates air pressure

### H: COLUMNAR STRENGTH

Moulded-in ribs provide extra columnar strength

### I: REINFORCED CORNERS AND EDGES

15% to 20% Thicker corners and edges for added impact protection

### J: SHOCK MOUNTS

Shock mounts provide excellent shock and vibration cushion for delicate equipment

### K: RECESSED HARDWARE

Hardware protected from impact, and snag free transport

### L: SQUARE HOLE 19" RACK FRAME (WIDTH)

Fixed square hole frame for universal equipment fit


### M: PATENTED METAL INSERTS

Catch and hinge attachment points distribute load to case walls

| CAT NO.      | RACK HEIGHT U SIZE |       |     | RACK LENGTH |     | RACK WIDTH |     | LID I.D. FRONT/BACK <sup>1</sup> | LENGTH O.D. <sup>2</sup> |      | WIDTH O.D. |     | HEIGHT O.D. <sup>3</sup> |     | WEIGHT |      | SHIPPING CUBE |      |
|--------------|--------------------|-------|-----|-------------|-----|------------|-----|----------------------------------|--------------------------|------|------------|-----|--------------------------|-----|--------|------|---------------|------|
|              | U                  | in    | mm  | in          | mm  | in         | mm  |                                  | in                       | mm   | in         | mm  | in                       | mm  | lbs    | kg   | ft3           | m3   |
| CLASSIC-V-3U | 3U                 | 5.25  | 133 | 33          | 838 | 19         | 483 | 2.5 / 5.25                       | 45.8                     | 1163 | 27.0       | 686 | 12.3                     | 311 | 51.0   | 23.1 | 8.8           | 0.25 |
| CLASSIC-V-4U | 4U                 | 7.00  | 178 | 33          | 838 | 19         | 483 | 2.5 / 5.25                       | 45.8                     | 1163 | 27.0       | 686 | 14.6                     | 371 | 54.0   | 24.5 | 10.5          | 0.30 |
| CLASSIC-V-5U | 5U                 | 8.75  | 222 | 33          | 838 | 19         | 483 | 2.5 / 5.25                       | 45.8                     | 1163 | 27.0       | 686 | 16.6                     | 422 | 56.0   | 25.4 | 11.9          | 0.37 |
| CLASSIC-V-7U | 7U                 | 12.25 | 311 | 33          | 838 | 19         | 483 | 2.5 / 5.25                       | 45.8                     | 1163 | 27.0       | 686 | 20.6                     | 524 | 65.0   | 29.5 | 14.7          | 0.42 |
| CLASSIC-V-9U | 9U                 | 15.75 | 400 | 33          | 838 | 19         | 483 | 2.5 / 5.25                       | 45.8                     | 1163 | 27.0       | 686 | 24.3                     | 616 | 72.0   | 32.7 | 17.4          | 0.49 |


# PELI-HARDIGG™ 24" SUPER-V RACK MOUNT CASE

FOR MODERATELY FRAGILE EQUIPMENT

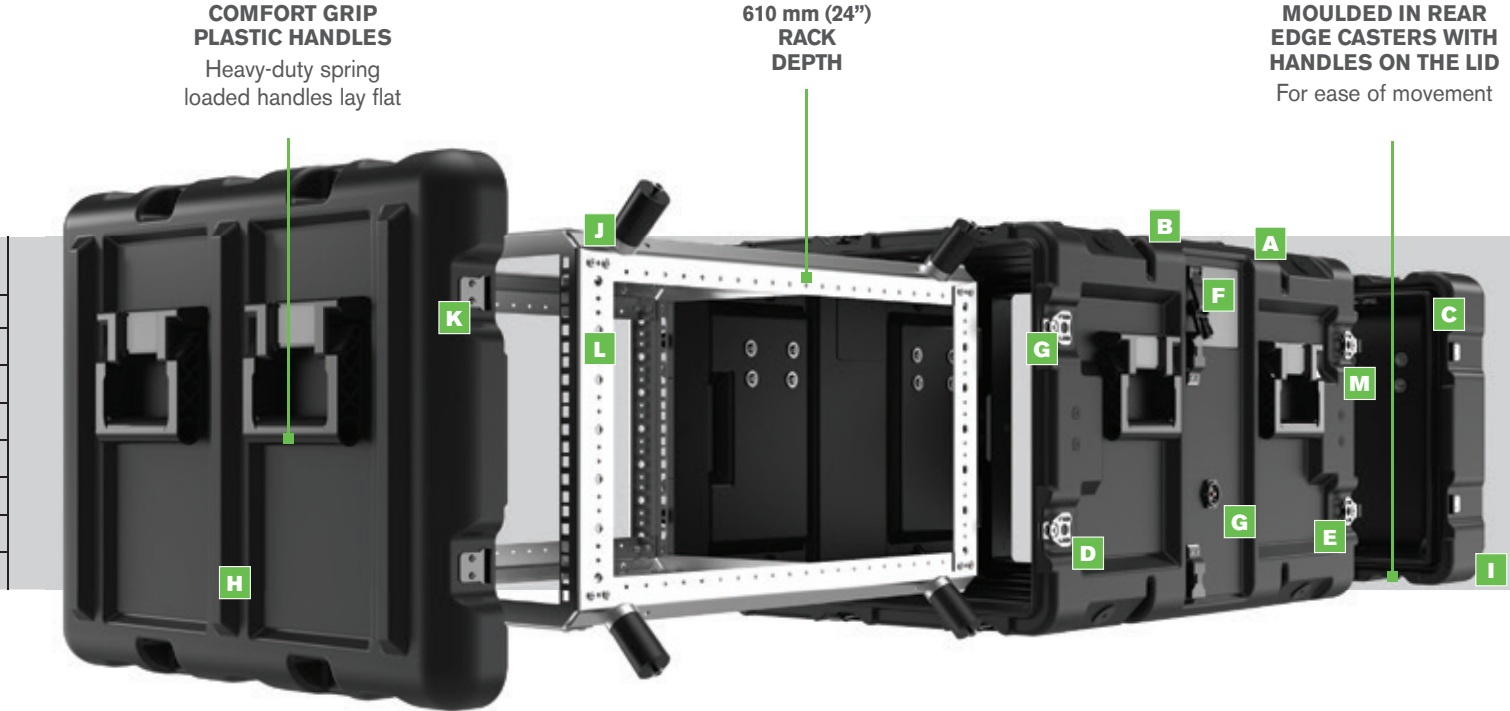


| CAT NO.     | RACK HEIGHT U SIZE |       |     | RACK LENGTH |     | RACK WIDTH |     | LID I.D. FRONT/BACK <sup>1</sup> | LENGTH O.D. <sup>2</sup> |     | WIDTH O.D. <sup>3</sup> |     | HEIGHT O.D. <sup>3</sup> |     | WEIGHT |      | SHIPPING CUBE |      |
|-------------|--------------------|-------|-----|-------------|-----|------------|-----|----------------------------------|--------------------------|-----|-------------------------|-----|--------------------------|-----|--------|------|---------------|------|
|             | U                  | in    | mm  | in          | mm  | in         | mm  |                                  | in                       | mm  | in                      | mm  | in                       | mm  | lbs    | kg   | ft3           | m3   |
| SUPER-V-3U  | 3U                 | 5.25  | 133 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 11.4                     | 289 | 50     | 22.7 | 6.0           | 0.17 |
| SUPER-V-4U  | 4U                 | 7.00  | 178 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 13.1                     | 333 | 53     | 24.0 | 6.9           | 0.20 |
| SUPER-V-5U  | 5U                 | 8.75  | 222 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 14.9                     | 378 | 55     | 24.9 | 7.9           | 0.22 |
| SUPER-V-7U  | 7U                 | 12.25 | 311 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 18.4                     | 467 | 60     | 27.2 | 9.7           | 0.28 |
| SUPER-V-9U  | 9U                 | 15.75 | 400 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 21.9                     | 556 | 64     | 29.0 | 11.6          | 0.33 |
| SUPER-V-11U | 11U                | 19.25 | 489 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 25.4                     | 644 | 69     | 31.3 | 13.4          | 0.38 |
| SUPER-V-14U | 14U                | 24.50 | 622 | 24          | 610 | 19         | 483 | 2.2 / 5.2                        | 38.5                     | 978 | 28.3                    | 603 | 30.6                     | 778 | 74     | 33.6 | 16.2          | 0.46 |

## PELI-HARDIGG™ 33" CLASSIC-V RACK MOUNT CASES

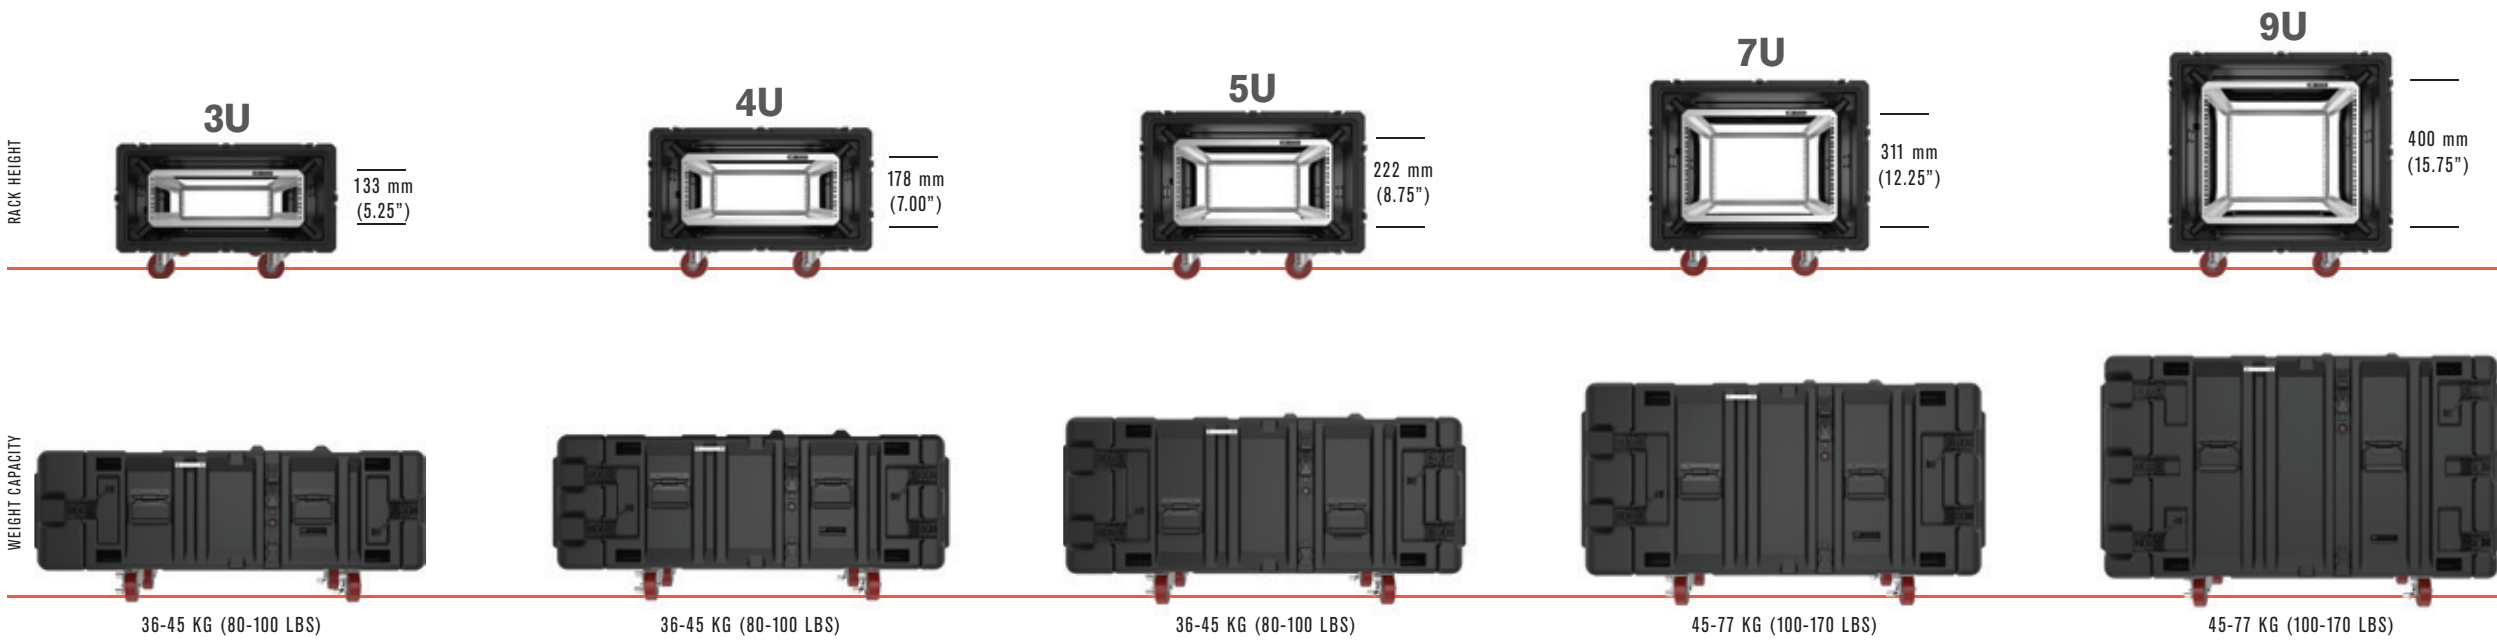

## PELI-HARDIGG™ 24" SUPER-V RACK MOUNT CASES

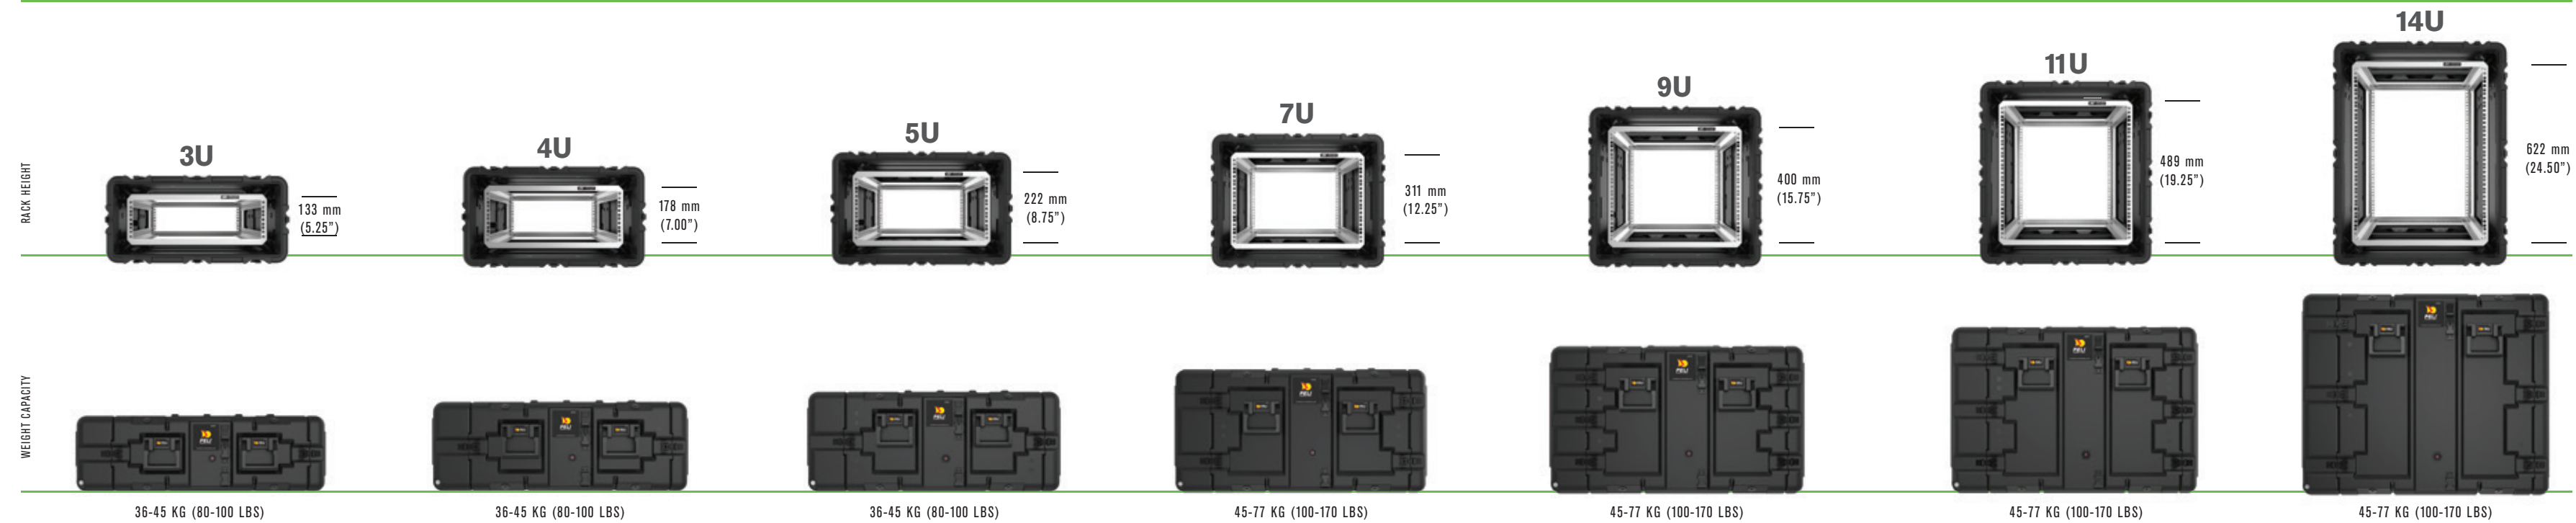

<sup>1</sup> Lid Outside Dimensions (O.D.) = Lid I.D. plus 31.8 mm (1.25") per lid. <sup>2</sup> Length Includes Stacking Ribs. <sup>3</sup> Height Excludes 1" Stacking Ribs (11.2 mm (.44") on Super-V). \* Width of all cases includes attached standard handles.