



Vonk B.V.  
Voorstraat 41  
3265 BT PIERSHIL

Tel. +31-(0)88-0330300  
info@vonkbv.com  
www.vonkbv.com



# COOLPALL™ VERTOS



## BULK SHIPPING SYSTEMS

CoolPall™ Vertos is the next generation of high performance bulk shipping systems from Peli BioThermal™. This durable bulk shipper has been designed and tested with the ability to be flat-packed, modular, easy and quick to assemble.

## WHY CHOOSE COOLPALL™ VERTOS?

### Ease & Speed of Use

- Reduced number of coolants with all-year packout for simplicity in packing
- Accepts full pallets of product for operational speed and simplicity
- Ergonomic design features innovative interlocking components for quick and easy assembly
- Flat-packed height minimises in-bound distribution costs and saves warehouse space
- Modular components reduces inventory and ease in ordering spare parts

### Proven robust performance

- Strict temperature control within demanding global environments
- High density molded materials for thermal and mechanical robustness, yet still light weight
- Best-in-class payload to volume ratio, possibly lowering transport costs

## COOLPALL™ VERTOS

### DURATION

120+ Hours

### TEMPERATURE

2°C to 8°C



15°C to 25°C

### VOLUME


Euro & ISO Pallet sizes,  
volumes up to 3175L

## COOLPALL™ VERTOS PRODUCT SPECIFICATION

| Product        | TEMP    | Exterior Dimensions - mm | Interior Dimensions - mm | Payload Volume (L) | Tare Weight - kg |
|----------------|---------|--------------------------|--------------------------|--------------------|------------------|
| Vertos 1/4 PMC | 2-8°C   | 1195 x 1565 x 1565       | 927 x 1296 x 1150        | 1382               | 235              |
| Vertos 1/4 PMC | 15-25°C | 1195 x 1565 x 1595       | 927 x 1296 x 1150        | 1382               | 235              |
| Vertos ISOPAD  | 2-8°C   | 1396 x 1565 x 1595       | 1127 x 1296 x 1150       | 1680               | 235              |
| Vertos ISOPAD  | 15-25°C | 1396 x 1565 x 1595       | 1127 x 1296 x 1150       | 1680               | 235              |
| Vertos 1/2 PAG | 2-8°C   | 2195 x 1565 x 1595       | 1927 x 1296 x 1150       | 2872               | 323              |
| Vertos 1/2 PAG | 15-25°C | 2195 x 1565 x 1595       | 1927 x 1296 x 1150       | 2872               | 323              |
| Vertos 1/2 PMC | 2-8°C   | 2395 x 1565 x 1595       | 2130 x 1296 x 1150       | 3175               | 338              |
| Vertos 1/2 PMC | 15-25°C | 2395 x 1565 x 1595       | 2130 x 1296 x 1150       | 3175               | 338              |

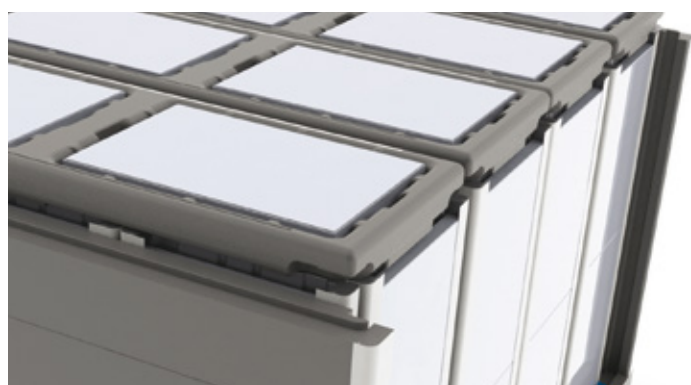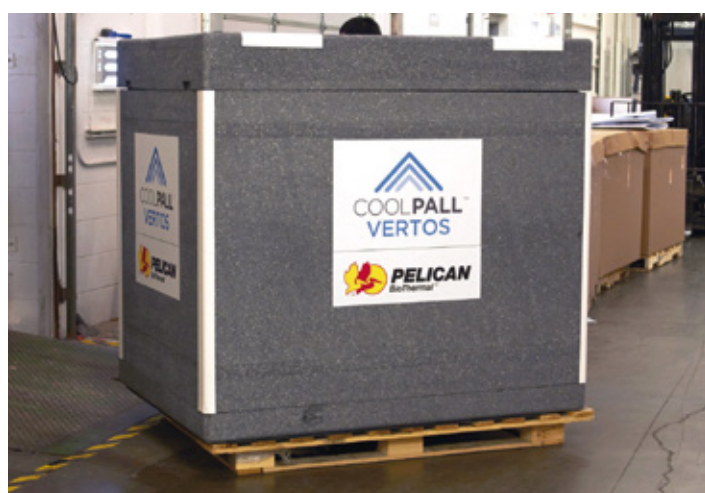

**Interlocking high density construction**  
Increases the possibility of re-use

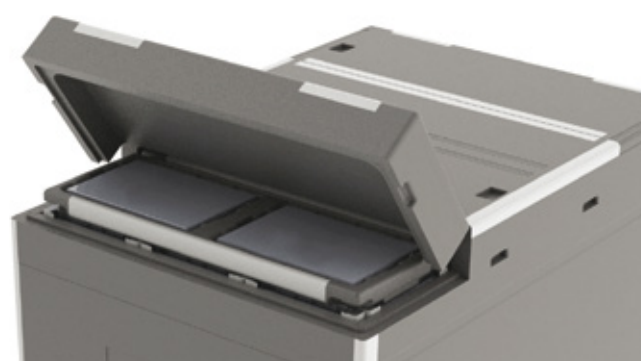

**Inspection hatch**  
Minimising the potential for excursions during customs inspection

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crêdo™, Crêdo Cube™, Crêdo ProEnvision™, Crêdo Xtreme™, Crêdo DURACUBE™, Crêdo ProMed™, Sherpa™ Systems, Chronos™ Express, Chronos™ Advance and CoolPall™ Vertos are registered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.



©2017 PELI BioThermal all rights reserved.