


## ACCESSORIES

| PRODUCT   | DESCRIPTION                  | PARTNUMBER | WEIGHT | SINGLE BOX SIZE                    | EAN CODE      |
|---|------------------------------|------------|--------|------------------------------------|---------------|
|  | Tripod for single lamp mount | 410.9003   | 2.6 kg | L: 77 cm,<br>W: 16 cm, H: 16 cm    | 5704049908116 |
|  | Magnet for worklight         | 410.9002   | 118 g  | L: 4.5 cm,<br>W: 4.5 cm, H: 4.5 cm | 5704049908109 |

## DIMENSIONS

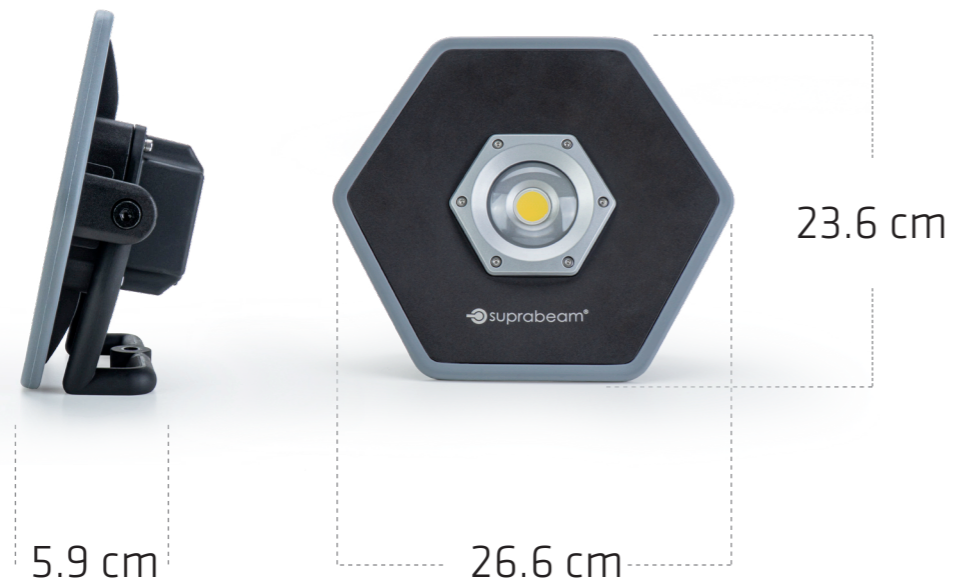

Distributor's Stamp:

Distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

# suprabeam®

# W4r



# 4400 LUMENS



Li-ion  
57.7 Wh



1355 g



110°



IP65

410.1202

## KEY FEATURES / UNIQUE SELLING POINTS (USP)




### WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



### MAGNETIC (OPTIONAL ACCESSORY)

With our magnet for W2r and W4r (410.9003) the W4r can be fixed on any magnetic surface to use it as a fixed work light with the perfect angle.



### 180° ADJUSTABLE LIGHT

The 180° flexible handle on the W4r ensures a very flexible and versatile worklight for multiple situations.




### CONTINUOUS USE WITH CABLE

The W4r can be used with the charging cable plugged in. This means the W4r can be used for a whole workday without charging. Light output with cable is reduced to 1000 lumen.



### HIGH CRI +80

The W4r has High CRI (+80) to bring out the true colors. With the High CRI the W4r provides the most natural colors to make the workday a lot easier.



### POWER BANK FUNCTION

The W4r can be used as a power bank. The W4r has a USB 5V/2A Output on the back for charging a mobile phone.


## PACKAGING



### PACKAGING

|  |  |
|--|--|
| <b>Customs Tariff Number:</b>              | 9405 4990  |
| <b>Packaging:</b>                          | Carton Box                                       |
| <b>Single Box Content / Size / Weight:</b> | 1 pcs, Height/Width/Depth, 26/28/8.8 cm / 1740 g |
| <b>Master Box Content / Size / Weight:</b> | 4 pcs, 38 x 30.5 x 27.5 cm / 7.6 kg              |
| <b>Part. No.:</b>                          | 410.1202   |
| <b>EAN-CODE:</b>                           | 5704049908079                                    |

## LIGHT CURVE AND RUNTIMES

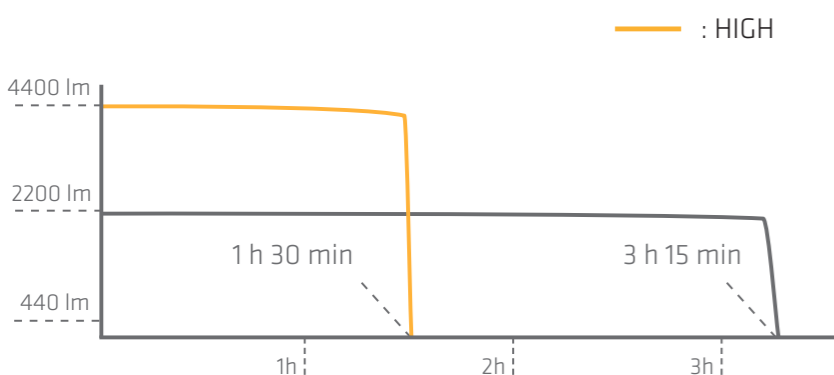

|        |             |            |
|--------|-------------|------------|
| HIGH   | 4400 LUMENS | 1 h 30 min |
| MEDIUM | 2200 LUMENS | 3 h 15 min |
| LOW    | 1100 LUMENS | 6 h 30 min |

## SPECIFICATIONS

|   |   |
|---|---|
| <b>LED / Focus Configuration:</b>                   | Super Bright COB LED, 6500K               |
| <b>Case Material / Surface Treatment:</b>           | Aluminium, 2K Plastic Soft/Hard           |
| <b>Case Color:</b>                                  | Black / Light Grey                        |
| <b>Switch:</b>                                      | HIGH, MEDIUM, LOW                         |
| <b>Dimensions:</b>                                  | H: 236.6mm, W: 266mm, D: 59mm             |
| <b>Weight incl. Battery:</b>                        | 1355g                                     |
| <b>Ingress Protection/Impact Protection Rating:</b> | Water Resistant and Dustproof IP65 / IK07 |
| <b>Temperature (Operation):</b>                     | -10°C to +40°C                            |

## ELECTRONICS

|                               |  |
|-------------------------------|--|
| <b>Built in Controller:</b>   | Yes, 3-step Controller by Press                                  |
| <b>Standard Power Source:</b> | Li-ion 11.1V, 5200 mAh, 57.72 Wh                                 |
| <b>Charging Time:</b>         | 3 hours 45 min   |
| <b>Beam Type / Distance:</b>  | 180° Adjustable Handle / 80 m                                    |
| <b>Luminous Flux:</b>         | High: 4400lm, Medium: 2200lm, Low: 1100lm (cabled output 1000lm) |
| <b>Lighting Time:</b>         | High: 1h 30 min, Medium: 3h 15 min, Low: 6h 30 min               |
| <b>Accessories Included:</b>  | 110V -240V AC/DC Charger / 15V 1.5A                              |
| <b>Charging Temperature:</b>  | -0°C to +45°C  |

## WHAT'S IN THE BOX

WORKLIGHT



ADAPTER

