




Light Control Function

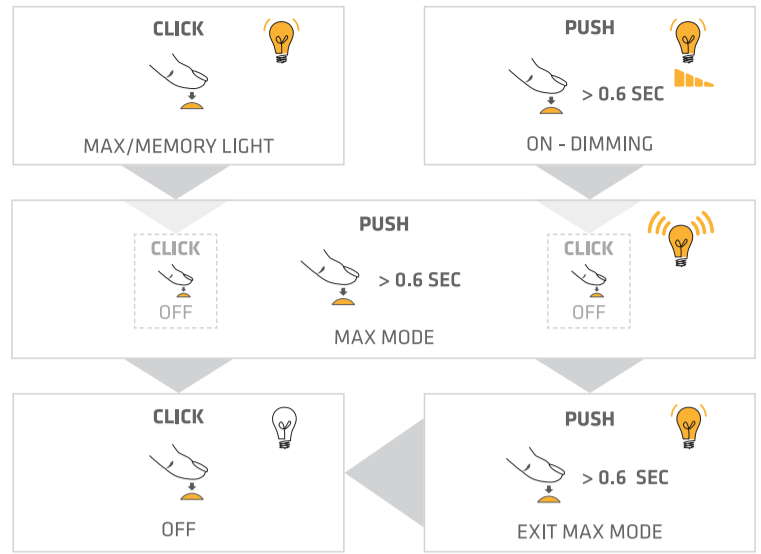


HIGH TEMPERATURE SAFETY PROTECTION

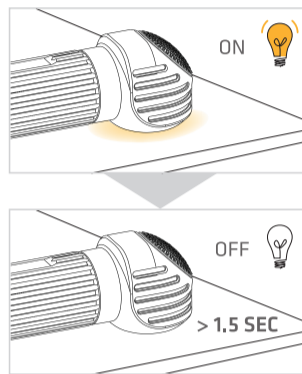

TRANSPORT LOCK

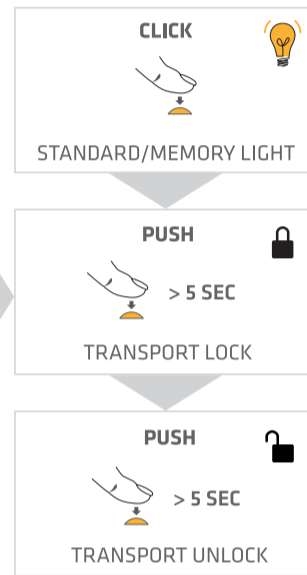

BATTERY LEVEL

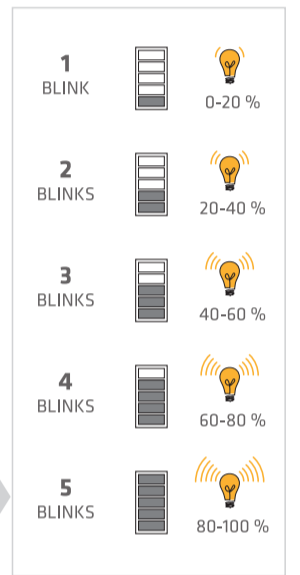


Additional Information




FOR MORE INFO

Polarity

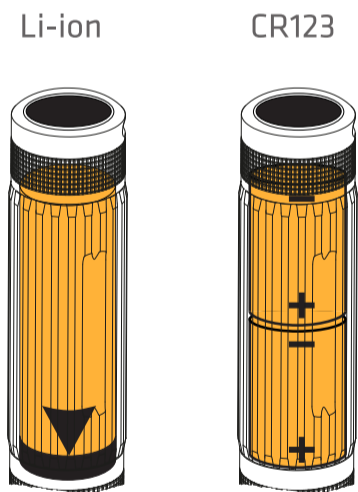

Charging (0°C - +45°C)

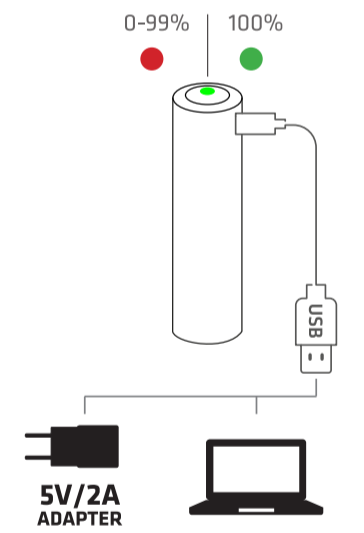

Warning



Specifications

Li-ion	165 m
30°/70°	114 g
-20°C - +50°C (CR123): -40°C - +50°C	IP 68

