
LOCAL TO LONG DISTANCE IN A SLIDE

Our new 5 Series lights feature flood to spot technology:

The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.

Up to 250 meters of long distance visibility in SPOT MODE

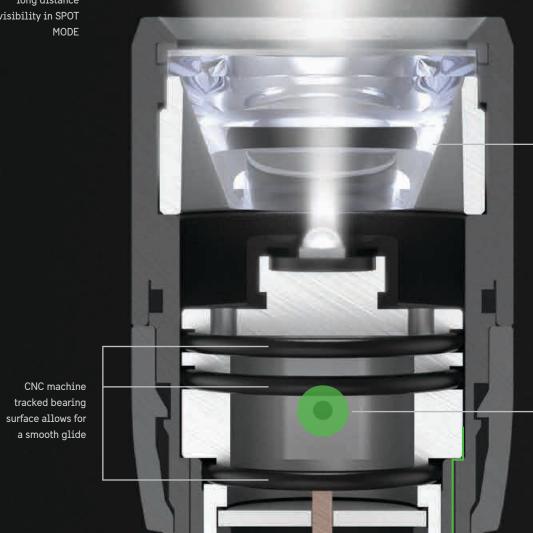

Up to 78° beam spread in FLOOD MODE

Proprietary
optimised lens makes
a clean
collimated beam
spread for FLOOD
and SPOT MODES

Gore membrane

Air path

Product shown: Peli™ 5010 Light

5 SERIES SPECIFICATIONS

CAT NO.	BATTERIES	WEIGHT W/ BATTERIES	LENGTH	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI IP RATING
5000	2 AAA (Batteries Included)	68 gr (2.4 oz)	14.2 cm (5.59")	202*, 21***	1h 15m*, 7h***	69m*, 21m***	IPX8
5010	2 AA (Batteries Included)	145 gr (5.1 oz)	15.9 cm (6.26")	392*, 22***	2h 15m*, 26h***	184m*, 43m***	IPX8
5020	4 AAA (Batteries Included)	207 gr (7.3 oz)	14.9 cm (5.87")	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250m*, 147**, 44m***	IPX8
5050R	Lithium-Ion Rechargable (Included)	164 gr (5.8 oz)	15.6 cm (6.16")	883 ^B , 393*, 21***	N/A ^B , 2h 30m*, 40h***	201m ^B , 134*, 30m***	IPX8


PELI LIMITED LIFETIME GUARANTEE OF EXCELLENCE

* High \mid ** Medium \mid *** Low \mid B Boost \mid *Refer to Peli.com for full specs. For details go to www.peli.com

Refer to www.peli.com/WARRANTY for full details.

©2018 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Part No. 0030-5SB-000E OCT18

DISTRIBUTED BY:

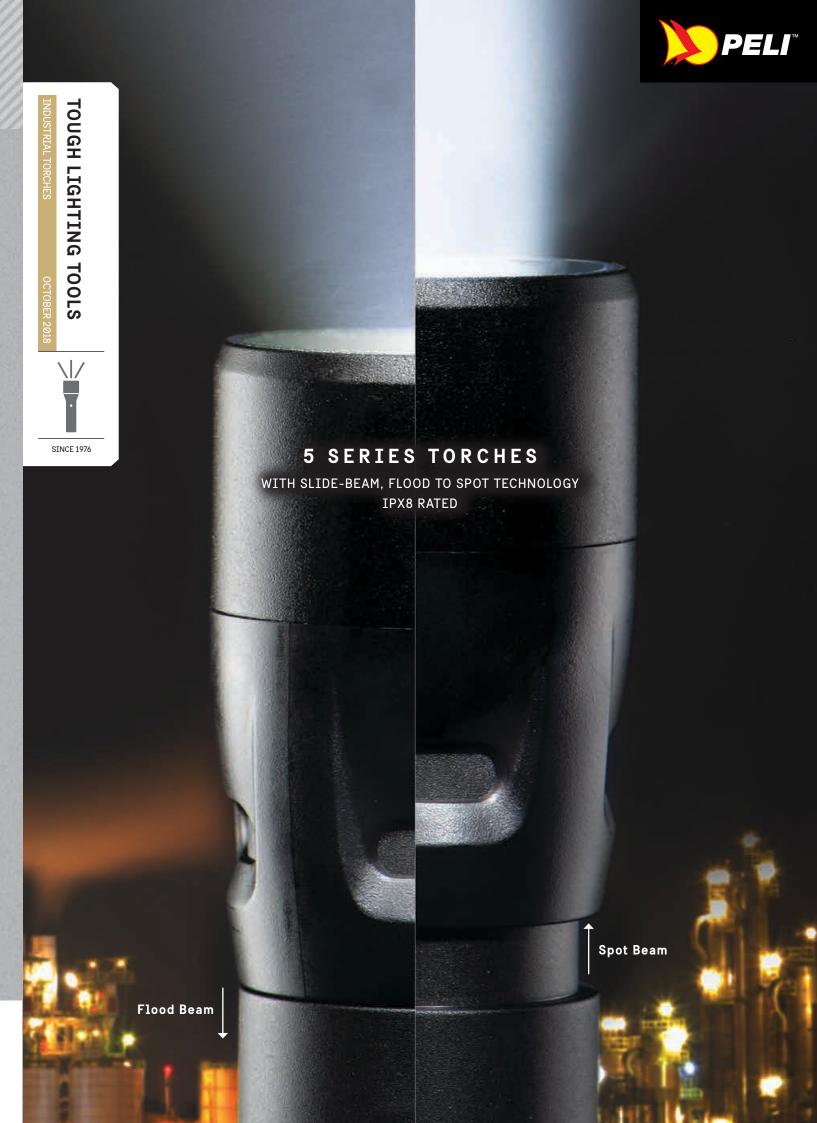



SLIDE AND CONQUER

LED POWER: TOOLS WITH VERSATILITY



STAY IN FRONT OF THE DARK

Get the industry's first torches with a tail switch that has an embedded battery status

indicator to stop guessing in the dark. Also, with the 5050R's built in USB (Output) and Micro USB (Input) ports, you'll get a full charge for your light or emergency back-up power for smart phones and other electronics. Reload the 5000, 5010 and 5020 lights with fresh alkaline batteries to see the job through.

WATERPROOF - IPX8 RATED

The Gore® vent and air path installed inside of the 5-series lights, allow the air to go in and out in order to let the flood/spot sliding mechanism function, but keep the water out.



THUMB THROUGH DECAF TO EXTRA **CAFFEINATED LED POWER**



high, flashing or boost mode options let

you switch to the best light intensity, from low lumens that are easy on the eyes when up close, to super-bright intensity for reaching way out in the dark. And with the type II hard anodized finish, the 5 Series torches are as tough as they look.



PELI™ 5000 LIGHT



Slim design with tough steel clip, mounts to pockets or fits in tight spots for quick access.

BEAM DISTANCE// Up To: 69m

LUMENS// Up To: 202 Lumens

MODES// High / Low / Flashing

BATTERIES// 2 AAA Alkaline Batteries

(Batteries Included)



Get the best of both worlds.

The 5010 is our medium sized torch that gives you the lumens, run time and size of the 5000 slim design, with the powerful performance of the 5050R torch.

BEAM DISTANCE//

Up To: 184m

LUMENS// Up To: 392 Lumens

MODES// High / Low / Flashing

BATTERIES//

2 AA Alkaline Batteries (Batteries Included)



PELI™ 5020

When you need extra beam distance,

go with the 5020 torch. With up to 250 meters of beam distance and up to 586 lumens of LED brightness, you'll have enough light to see the full length of your facility.

BEAM DISTANCE// Up To: 250m

LUMENS// Up To: 586 Lumens

MODES// High / Medium / Low / Flashing

BATTERIES// 4 AAA Alkaline Batteries (Batteries Included)

LIGHT





Get power for extra long shifts and your smartphone. Recharge the 5050R by connecting directly to its Micro USB port and get up to 40 hrs of runtime (on low power setting). The 5050R doubles as a portable charger (or power bank) for your smart phone with a USB power output.

The 5050R: it's our rechargeable option with flood to spot beam technology.

BEAM DISTANCE//

Up To: 201m

LUMENS//

Up To: 883 Lumens

MODES//

Boost / High / Low / Flashing

BATTERIES//

Lithium Ion Rechargeable Battery (Included)



