

**PELI 1 YEAR LIMITED WARRANTY FOR ROTO MOULDED CONTAINERS**

Peli Products S.L.U. warrants to the original purchaser of its rotationally moulded containers that its containers will be free of defects in materials and workmanship for a period of one year from the date of invoice. Such warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Peli warrants against defects in materials and workmanship for a period of 90 days from the invoice date. To the extent permitted by law, Peli's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Refer to [www.peli.com](http://www.peli.com) for full details.

**U.S.A.**

**U.S.A. & GLOBAL HEADQUARTERS**

23215 Early Avenue  
Torrance, CA 90505 USA  
Tel 310.326.4700  
800.473.5422 (Outside CA)  
Fax 310.326.3311

**SOUTH DEERFIELD**

PELI HARDIGG CASES  
USA HEADQUARTERS  
147 North Main Street  
South Deerfield, MA 01373  
Tel (800) 542-7344  
Fax (413) 665-8330

**EUROPE**

**EUROPE, MIDDLE EAST & AFRICA HQ**

PELI PRODUCTS, S.L.U.  
C/ Provença, 388, Planta 7  
08025 Barcelona, Spain  
Tel +34 934 674 999  
Fax +34 934 877 393  
[www.peli.com](http://www.peli.com)

**GERMANY**

PELI PRODUCTS GERMANY  
GmbH  
Düsseldorf Kö-Bogen  
Business Center  
Königsallee 2b, 5th Floor  
40212 Düsseldorf, Germany  
Tel +49 (0) 211 882 42 401  
Fax +49 (0) 211 882 42 200  
[www.peli.com](http://www.peli.com)

**PELI-HARDIGG UK CASE CENTER**

Unit 4, Brookfield Industrial Estate  
Leacon Road  
Ashford Kent TN23 4TU  
Tel +44 (0) 1233 895895  
[www.peli.com/en/acs](http://www.peli.com/en/acs)

**PELI-HARDIGG FRANCE CASE CENTER**

20/22 Rue des Petits Hôtels  
75010 Paris,  
France  
Tel +33 (0)1 44 83 95 63

**UAE**

PELICAN PRODUCTS  
MIDDLE EAST  
JAFZA 13 Office 032,  
Jebel Ali Free Zone  
P.O. Box 261008  
Dubai – United Arab Emirates  
Tel +971 4 8876550  
Fax +971 4 8876549

\* We also have offices in Canada, Japan, China and Australia.



> MIN MAC RACK™ CONTAINERS: SHOCK MOUNTED 19" RACKS FOR FRAGILE EQUIPMENT





> MIN MAC RACK™ CONTAINERS

> SUPERIOR COMPACT MOBILITY FOR RACK MOUNTABLE EQUIPMENT

The lightweight, compact design of the Min Mac Rack™ double ended cases, offer light to medium duty protection and boast industry leading shock performance. It's angled precision-engineered elastomeric shock mounts are fine-tuned to match the weight and fragility of your equipment, ensuring maximum shock and vibration isolation. High strength, lightweight, heat treated, square holed steel rack frame provides a range of mounting options for single or multiple fragile equipment, IT, Comms, test equipment and ground controllers.

If you are trying to make the most of limited space, but still require a rugged protection for your equipment, Min Mac Rack™ is the answer.

Designed to meet the requirements of Def Stan 81-41 Level J, Mil Standard 810, STANAG 4340 and other European standards.



> MIN MAC RACK™ FOR DEPLOYED EQUIPMENT

Edge Casters	Lid Storage Pouch	Cage Nuts with Screws	Comfort Grip Plastic Handles	Stainless Steel Black Catch and Strike	Card Holder	ID Plate
Drawers	Custom Labels	Interlocking Catches	Breather/Pressure Valve	Shelves, Fixed and Sliding	Humidity Indicator	Lockable Cable Catch

> FEATURES


- Lightweight, compact, and inter-stackable.
- Shock mounts protect equipment from shock and vibration.
- High-strength steel rack frame supports equipment from 10-50 kg.
- Patented, wide-design, Comfort Grip Handles™ come as a standard option.
- 10 different models, frame heights 4-12U in two depths, 480 and 610mm.
- Variety of accessories and options.
- Manufactured in Europe.
- Edge casters standard in deep lids.

> TYPICAL APPLICATIONS INCLUDE:

- Rack mountable precision test equipment.
- Electro-mechanical.
- Medical and biological diagnostic equipment, memory storage devices.
- Meteorological instruments.
- Mobile operations.

> OPTIONS INCLUDE:

- Broadcast and video gear.
- Laboratory equipment.
- Aerospace instrumentation.
- Servers, military mission planning.
- Command and control equipment.
- Flight simulators.
- Lift rings/tie down rings.
- Padlock hasp.
- Interlocking plates.

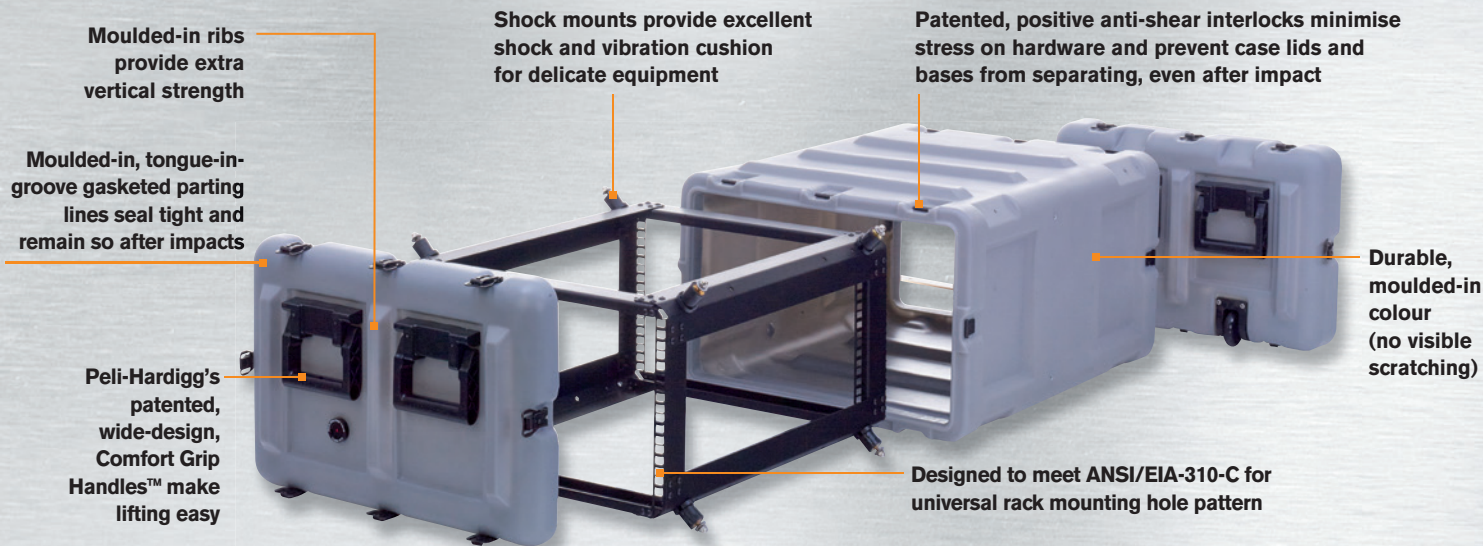

> OPTIONAL COLOURS							
	Gray – 133 Fed Std# 26270		Tan – 250 Fed Std# 20372		Blue – 135(lt) Pantone# 292U		White – 132 Fed Std# 27925
	Yellow – 131 Fed Std# 23538		Maroon – 197 Pantone# 202U		Blue – 101(dk) Fed Std# 25052		Black – 032 Fed Std# 27040
					Green – 138(forest) Fed Std# 24052		Orange – 134 Fed Std# 12197
					Red – 130 Fed Std# 21105		Olive Drab – 137 Fed Std# 34096

Note: Some options are not available on all case sizes and availability is subject to change at manufacturer's discretion. Case colours/options may differ slightly from printed versions.

> MIN MAC RACK™	RACK HEIGHT U-SIZE		RACK LENGTH	RACK WIDTH		LID I.D. FRONT/BACK	LID O.D. FRONT/BACK	CASE LENGTH O.D.*	CASE WIDTH O.D.	CASE HEIGHT O.D.	WEIGHT
PART NO.	U	mm	mm	inches	mm	mm	mm	mm	mm	mm	kg
MR4U 40/480/40	4U	178	480	19	483	45/45	80/80	740	555	285	17,2
MR4U 40/480/100						45/85	80/125	785			17,6
MR4U 40/610/40	4U	178	610	19	483	45/45	80/80	870	555	285	19,0
MR4U 40/610/100						45/85	80/125	915			19,4
MR6U 40/480/40	6U	267	480	19	483	45/45	80/80	740	555	375	19,3
MR6U 40/480/100						45/85	80/125	785			19,8
MR6U 40/610/40	6U	267	610	19	483	45/45	80/80	870	555	375	20,9
MR6U 40/610/100						45/85	80/125	915			21,4
MR8U 40/480/40	8U	355	480	19	483	45/45	80/80	740	555	460	22,8
MR8U 40/480/100						45/85	80/125	785			23,5
MR8U 40/610/40	8U	355	610	19	483	45/45	80/80	870	555	460	24,8
MR8U 40/610/100						45/85	80/125	915			25,5
MR10U 40/480/40	10U	443	480	19	483	45/45	80/80	740	555	550	26,1
MR10U 40/480/100						45/85	80/125	785			26,8
MR10U 40/610/40	10U	443	610	19	483	45/45	80/80	870	555	550	28,2
MR10U 40/610/100						45/85	80/125	915			29,0
MR12U 40/480/40	12U	533	480	19	483	45/45	80/80	740	555	640	29,2
MR12U 40/480/100						45/85	80/125	785			30,0
MR12U 40/610/40	12U	533	610	19	483	45/45	80/80	870	555	640	31,7
MR12U 40/610/100						45/85	80/125	915			32,5

\*Length Outside Dimension includes both Lids. Please note all weights are approximate, and may vary. These weights have been calculated.