

FENIX[®]
LIGHTING FOR EXTREMES



2023 PRODUCT
CATALOG



Based in Shenzhen, China, Fenix designs and manufactures incredible lighting products in its company-owned facility. Fenix is committed to create lights that not only feature the best in lighting technology, but are also built to the highest standards for durability and longevity. Unlike contract manufacturers or subcontractors, Fenix takes ownership of the quality and performance of each and every light and subjects each to a battery of tests from their quality assurance professionals—ensuring the light is built to last.

FENIX LIGHTING US is the United States distributor for the Fenix line of lighting products and is committed to providing you with the best customer service. With facilities in Littleton, CO and Monticello, AR, Fenix Lighting US is poised to fulfill your needs quickly and efficiently.





TABLE OF CONTENTS

HEADLAMPS

HL Series	2
HM Series	2
HP Series	6

FLASHLIGHTS

E Series	9
GL Series	16
HT Series	17
LD Series	18
LR Series	19
COMING SOON	21
PD Series	23
T6 Penlight	26
TK Series	27
WF Series	30
WT Series	32

LANTERNS	34
--------------------	----

BIKE LIGHTS	36
-----------------------	----


ACCESSORIES	39
-----------------------	----

HEADLAMPS



HL18R-T

500 LUMENS

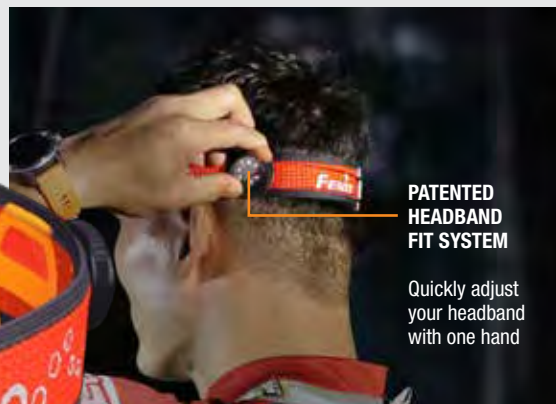


**PATENTED
HEADBAND
FIT SYSTEM**

Quickly adjust
your headband
with one hand

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag
- ◆ APB-30 Storage Bag



- ◆ Max 500 lumen output from a 1300mAh Li-polymer battery pack or 3 AAA batteries
- ◆ Five modes including three brightness levels in spotlight mode, one level in floodlight mode, and SOS
- ◆ Two separate switches control the spotlight and floodlight modes
- ◆ Patented headband fit system

ANSI/PLATO FL1	Spotlight Mode			Floodlight Mode	
	Low	Med	Turbo	Low	S.O.S.
OUTPUT LUMENS	70	200	500	30	4
RUNTIME	Lithium	20h	8h	3h*	30h
	AAA	20h	11h	4h*	300h
DISTANCE	115ft (35m)	177ft (54m)	269ft (82m)	39ft (12m)	16ft (5m)
INTENSITY	310cd	749cd	1700cd	38cd	8cd
IMPACT RESISTANCE	1m				
WATERPROOF	IP66, rain/splash proof & dustproof				
SIZE	Length: 2.7" (68.5mm) Width: 1.85" (45mm) Height: 1.55" (39.5mm)				
WEIGHT	2.23 oz. (63.2g) including headband/excluding battery				

HM23

240 LUMENS



- ◆ Max 240 lumen output from included AA battery
- ◆ One switch controls three brightness levels
- ◆ Extremely light weight; 1.5 oz.
- ◆ Waterproof and dustproof

OPTIONAL ACCESSORIES

- ◆ ARB-L14 Battery
- ◆ APB-20 Gear Bag
- ◆ APB-30 Storage Bag

ANSI/PLATO FL1	Low	Medium	Turbo
OUTPUT LUMENS	4	70	240
RUNTIME	100h	16h	8h*
DISTANCE	32ft (9.5m)	112ft (34m)	207ft (63m)
INTENSITY	22cd	286cd	980cd
IMPACT RESISTANCE	2m		
WATERPROOF	IP68, waterproof underwater to 2m/dustproof		
SIZE	Length: 2.7" (69.5mm) Width: 1.3" (32mm) Height: 1.6" (40mm)		
WEIGHT	1.5 oz. (43g) excluding battery		

BEST SELLER

HM50R v2.0

700 LUMENS



- ◆ Max 700 lumen output from one included 16340 rechargeable li-ion battery
- ◆ Six modes including four brightness levels, red light and red flash
- ◆ USB type-C rechargeable with battery level indicator
- ◆ Quickly detachable to use as a right angle flashlight




- OPTIONAL ACCESSORIES**
- ◆ APB-20 Gear Bag
 - ◆ APB-30 Storage Bag
 - ◆ ARB-L16 Battery
 - ◆ CR123A Battery

ANSI/PLATO FL1	Low	Med	High	Turbo	Red	Red Flash
OUTPUT LUMENS	30	130	400	700	5	5
RUNTIME	42h	8h	3h	1h*	60h	120h
DISTANCE	75ft (23m)	161ft (49m)	282ft (86m)	377ft (115m)	20ft (6m)	20ft (6m)
INTENSITY	128cd	596cd	1849cd	3350cd	9cd	9cd
IMPACT RESISTANCE	2m					
WATERPROOF/DUSTPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 2.52" (64mm) Width: 1.42" (36mm) Height: 1.26" (32mm)					
WEIGHT	2.75 oz. (78g) including battery and headband					

BEST SELLER

HM60R

1300 LUMENS

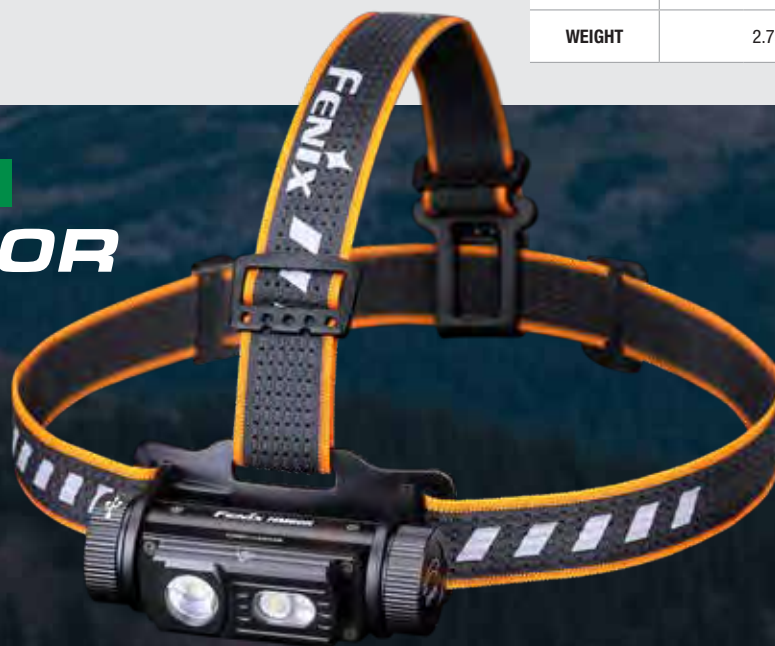

- ◆ Max 1300 lumen output from an included 18650 rechargeable li-ion battery or two CR123A lithium batteries
- ◆ Eight modes including four spotlight levels, two levels of neutral white light, red light, and SOS
- ◆ Stride frequency sensor; brightness changes with speed



- OPTIONAL ACCESSORIES**
- ◆ ARB-L18 Battery
 - ◆ CR123A Battery
 - ◆ ALG-03v2 Helmet Mount
 - ◆ ALG-04 Helmet Mount
 - ◆ APB-20 Gear Bag
 - ◆ APB-30 Storage Bag

ANSI/PLATO FL1	General Mode				Functional Mode			
	Low	Med	High	Turbo	Med Neutral	High Neutral	Red	SOS
OUTPUT LUMENS	30	130	350	1300	70	350	5	5
RUNTIME	54h	18h	8h	2h*	24h	8h	100h	200h
DISTANCE	59ft (18m)	118ft (36m)	197ft (60m)	381ft (116m)	49ft (15m)	108ft (33m)	16ft (5m)	16ft (5m)
INTENSITY	78cd	330cd	913cd	3400cd	55cd	268cd	7cd	7cd
IMPACT	Resistant to 2m							
WATERPROOF	IP68, dustproof/waterproof underwater to 2m							
SIZE	Length: 3.35" (85mm) Width: 1.77" (45mm) Height: 1.77" (45mm)							
WEIGHT	5.54 oz. (157g) including battery and headband							

HM61R

1200 LUMENS



- ◆ Max 1200 lumen output from an included 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Eight modes including five white levels and three red light levels
- ◆ Magnetic rechargeable with battery level indicator
- ◆ Large side switch operates all modes

OPTIONAL ACCESSORIES	
◆ ARB-L18 Battery	◆ ALG-04 Helmet Mount
◆ CR123A Battery	◆ APB-20 Gear Bag
◆ ALG-03v2 Helmet Mount	◆ APB-30 Storage Bag




	White Light					Red Light		
	Eco	Low	Med	High	Turbo	Low	Med	Flash
OUTPUT LUMENS	5	50	150	400	1200	1	5	5
RUNTIME	300h	35h	12h	4h	2h*	400h	80h	160h
DISTANCE	26ft (8m)	92ft (28m)	164ft (50m)	262ft (80m)	476ft (145m)	—	—	—
INTENSITY	14cd	195cd	635cd	1609cd	5287cd	—	—	—
IMPACT RESISTANCE	2m							
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof							
SIZE	Length: 4.0" (101mm) Width: 1.8" (46mm) Height: 1.4" (36mm)							
WEIGHT	3.5 oz. (99.5g) excluding battery							

HM65R

1400 LUMENS



- ◆ Max 1400 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- ◆ Seven modes including four spotlight brightness levels and three floodlight levels
- ◆ Type-C USB rechargeable with battery level indicator
- ◆ Dual switches for separate control of spotlight and floodlight

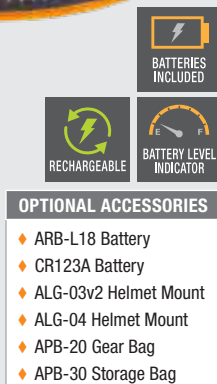

Independently Controlled SPOTLIGHT & FLOODLIGHT



ANSI/PLATO FL1	Spotlight Mode				Floodlight Mode		
	Low	Med	High	Turbo	Low	Med	High
OUTPUT LUMENS	50	130	400	1000	8	130	400
RUNTIME	90h	42h	22h	4h	280h	48h	20h
DISTANCE	121ft (37m)	187ft (57m)	331ft (101m)	535ft (163m)	20ft (6m)	98ft (30m)	180ft (55m)
INTENSITY	350cd	833cd	2600cd	6677cd	9cd	220cd	762cd
IMPACT RESISTANCE	2m						
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof						
SIZE	Length: 3.2" (80.5mm) Width: 2.2" (55mm) Height: 1.6" (40mm)						
WEIGHT	3.4 oz. (97g) excluding battery						

BEST SELLER

HM65R-T 1500 LUMENS

- ♦ Max 1500 lumen output from an included 18650 rechargeable Li-ion battery or two CR123A batteries
- ♦ Six modes including three spotlight levels and three floodlight levels
- ♦ USB-C rechargeable with battery level indicator
- ♦ Built with a magnesium alloy for lighter weight



PATENTED HEADBAND FIT SYSTEM



Unsnap the cap to loosen. Then snap back and rotate to tighten for the perfect fit.



BATTERIES INCLUDED



RECHARGEABLE



BATTERY LEVEL INDICATOR

OPTIONAL ACCESSORIES

- ♦ APB-20 Gear Bag
- ♦ APB-30 Storage Bag
- ♦ ARB-L18 Battery
- ♦ CR123A Battery

ANSI/ PLATO FL1	Spotlight Mode			Floodlight Mode		
	Low	Med	High	Low	Med	High
OUTPUT LUMENS	130	400	1300	5	70	400
RUNTIME	24h	12h	4h*	300h	36h	12h
DISTANCE	180ft (55m)	315ft (96m)	558ft (170m)	20ft (6m)	75ft (23m)	177ft (54m)
INTENSITY	762cd	2304cd	7261cd	10cd	133cd	737cd
IMPACT RESISTANCE	2m					
DUSTPROOF/ WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 3.15" (80mm) Width: 1.85" (47mm) Height: 1.54" (39mm)					
WEIGHT	3.21 oz. (91g) excluding battery					

BEST SELLER

HM70R 1600 LUMENS



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ ARB-L21 Battery
- ♦ ALF-18 Battery Holder
- ♦ ALG-03v2 Helmet Mount
- ♦ ALG-04 Helmet Mount
- ♦ APB-20 Gear Bag
- ♦ APB-30 Storage Bag



RECHARGEABLE



BATTERIES INCLUDED



BATTERY LEVEL INDICATOR



RED LED



FLASHING



INTELLIGENT MEMORY

ANSI/ PLATO FL1	General Mode				Functional Mode			
	Low	Med	High	Turbo	Red	Med Neutral	High Neutral	Red Flash
OUTPUT LUMENS	30	150	500	1600	5	70	400	5
RUNTIME	100h	30h	6h	2h*	400h	48h	8h	800h
DISTANCE	85ft (26m)	174ft (53m)	344ft (105m)	610ft (186m)	16ft (5m)	52ft (16m)	125ft (38m)	16ft (5m)
INTENSITY	170cd	690cd	2752cd	8667cd	8cd	68cd	352cd	8cd
IMPACT RESISTANCE	2m							
WATERPROOF/ DUSTPROOF	IP68, dustproof/waterproof underwater to 2m							
SIZE	Length: 3.72" (94.5mm) Width: 2.01" (51mm) Height: 1.81" (46mm)							
WEIGHT	7.27 oz. (206g) including battery and headband							

- ♦ Max 1600 lumen output from an included 21700 rechargeable Li-ion battery
- ♦ Eight modes including four brightness levels, two levels of neutral white light, red light, and red flash
- ♦ Hidden USB Type-C rechargeable port supports 2A charging current
- ♦ Large thumb-sized switch for easy and fast operation

HP16R

1250 LUMENS



OPTIONAL ACCESSORIES

- ◆ APB-30 Storage Bag

ANSI/PLATO FL1	Spotlight				Floodlight			Red Light	
	Low	Med	High	Turbo	Low	Med	High	Red	Flash
OUTPUT LUMENS	50	150	400	1250	5	150	400	5	5
RUNTIME	36h	12h	8h	4h*	300h	12h	8h	300h	600h
DISTANCE	171ft (52m)	289ft (88m)	489ft (149m)	837ft (255m)	20ft (6m)	98ft (30m)	157ft (48m)	20ft (6m)	20ft (6m)
INTENSITY	681cd	1943cd	5549cd	16260cd	11cd	220cd	583cd	8cd	8cd
IMPACT RESISTANCE	2m								
WATERPROOF/DUSTPROOF	IP66, dustproof/rain/splashproof								
SIZE	Headlamp: Length: 2.44" (62mm) Width: 1.85" (47mm) Height: 1.26" (32mm) Battery Case: Length: 2.87" (73mm) Width: 0.98" (25mm) Height: 2.72" (69mm)								
WEIGHT	7.62 oz. (216g) including battery and headband								



- ◆ Max 1250 lumen output from an included Li-polymer battery or 4 AA batteries
- ◆ Nine modes including four spotlight levels, three floodlight levels, and red/red flash
- ◆ USB type-C rechargeable

HP25Rv2.0


1600 LUMENS



ANSI/PLATO FL1	Spotlight					Floodlight			Red Light	
	Eco	Low	Med	High	Turbo	Low	Med	High	Red	Flash
OUTPUT LUMENS	50	150	400	1000	1600	5	150	400	5	5
RUNTIME	56h	24h	8h	4h	2h*	400h	24h	8h	400h	800h
DISTANCE	194ft (59m)	272ft (83m)	459ft (140m)	748ft (228m)	951ft (290m)	26ft (8m)	98ft (30m)	164ft (50m)	20ft (6m)	20ft (6m)
INTENSITY	879cd	1732cd	4888cd	13028cd	20849cd	16cd	220cd	605cd	11cd	11cd
IMPACT RESISTANCE	2m									
WATERPROOF/DUSTPROOF	IP66, dustproof/rain/splashproof									
SIZE	Headlamp: Length: 2.36" (60mm) Width: 1.85" (47mm) Height: 1.30" (33mm) Battery Case: Length: 3.90" (99mm) Width: 1.61" (41mm) Height: 1.56" (39.5mm)									
WEIGHT	8.40 oz. (238g) including battery and headband									

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L21 Battery
- ◆ ALF-18 Battery Holder
- ◆ APB-30 Storage Bag



- ◆ Max 1600 lumens from one included rechargeable 21700 li-ion battery
- ◆ Independent spotlight, floodlight and red light
- ◆ Separate lamp and battery compartment for a more balanced/secure wear
- ◆ USB Type-C rechargeable

HP30R v2.0

3000 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L21 Battery
- ◆ ALG-03v2 Helmet Mount
- ◆ ALG-04 Helmet Mount
- ◆ APB-30 Storage Bag

- ◆ Max 3000 lumen output from two included 21700 rechargeable li-ion batteries
- ◆ Eleven modes including four spotlight levels, three floodlight levels, and four combo levels
- ◆ USB Type-C rechargeable with discharge function to charge other devices

ANSI/ PLATO FL1	Spotlight Mode				Floodlight Mode			Spotlight & Floodlight			
	Low	Med	High	Turbo	Low	Med	High	Low	Med	High	Turbo
LUMENS	50	200	800	2000	50	200	1000	100	400	1800	3000
RUNTIME	120h	34h	12h	6h*	120h	34h	10h	60h	17h	6h	5h*
DISTANCE	138ft (42m)	256ft (78m)	512ft (156m)	823ft (251m)	56ft (17m)	112ft (34m)	256ft (78m)	148ft (45m)	279ft (85m)	581ft (177m)	886ft (270m)
INTENSITY	450cd	1515cd	6104cd	15733cd	76cd	291cd	1513cd	512cd	1812cd	7881cd	17933cd
IMPACT	Resistant to 2m										
WATERPROOF	IP66, dustproof/heavy splash/rain resistant										
SIZE	Headlamp: Length: 3.62" (92mm) Width: 2.20" (56mm) Height: 1.73" (44mm) Battery Case: Length: 4.21" (107mm) Width: 1.97" (50mm) Height: 1.61" (41mm)										
WEIGHT	15.41 oz. (437g) including battery and headband										

NEW

WH23R

600 LUMENS



OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag
- ◆ APB-30 Storage Bag



- ◆ Max 600 lumen output from the built-in 3.7V/2000mAh li-polymer battery pack
- ◆ Seven modes including three spotlight levels, three floodlight levels, and Turbo combo level
- ◆ Smart motion sensor for activation with the wave of a hand
- ◆ USB Type-C rechargeable with battery level indicator


	Spotlight Mode			Floodlight Mode			Spot+ Flood
	Low	Med	High	Low	Med	High	Turbo
OUTPUT LUMENS	30	120	300	5	70	300	600
RUNTIME	25h 57min	9h 32min	6h 19m*	150h	15h 36min	6h 19m*	3h 39min*
DISTANCE	85ft (26m)	174ft (53m)	276ft (84m)	16ft (5m)	56ft (17m)	115ft (35m)	328ft (100m)
INTENSITY	175cd	689cd	1772cd	7cd	71cd	309cd	2280cd
IMPACT RESISTANCE	2m						
WATERPROOF	IP66, dustproof/heavy splash/rain resistant						
SIZE	Length: 3.40" (86.45mm) Width: 1.77" (45mm) Height: 1.72" (43.72mm)						
WEIGHT	4.06 oz. (115g) including battery						

FLASHLIGHTS




NEW

E-CP 1600 LUMENS

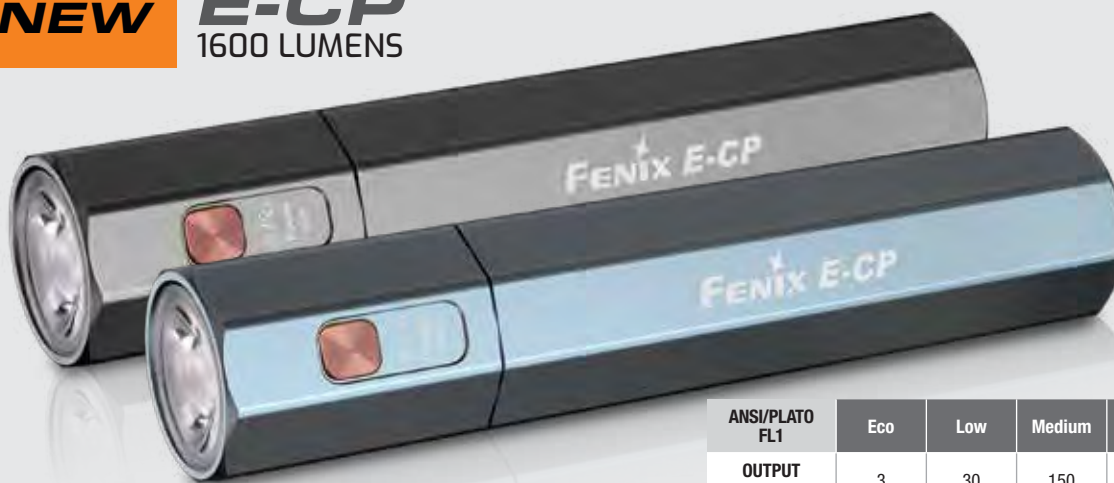

OPTIONAL ACCESSORIES

◆ None



- ◆ Max 1600 lumen output from the built-in 5000mAh rechargeable battery
- ◆ Six lighting modes including five brightness levels and strobe
- ◆ Features a power bank function which allows for 18W fast charging and discharging
- ◆ Octagonal shape prevents rolling
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	3	30	150	350	1600	1600
RUNTIME	504h	84h	20h	8h 30min	2h 30min*	—
DISTANCE	33ft (10m)	108ft (33m)	226ft (69m)	344ft (105m)	728ft (222m)	—
INTENSITY	25cd	270cd	1200cd	2750cd	12400cd	—
IMPACT RESISTANCE	1m					
WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 5.43" (138mm) Diameter: 1.1" (28mm)					
WEIGHT	6.0 oz. (170g) including battery					

NEW

E-SPARK 100 LUMENS



OPTIONAL ACCESSORIES

◆ None



- ◆ Max 100 lumen output from the built-in 800mAh li-polymer battery
- ◆ Five lighting modes including three brightness levels, red light, and red flash mode
- ◆ Features a power bank function which allows for charging and discharging for USB Type-C devices
- ◆ Tail cap can be used as a flashlight diffuser
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA

ANSI/PLATO FL1	Low	Medium	High	Red	Red Flash
OUTPUT LUMENS	5	30	100	5	5
RUNTIME	52h	11h	3h 20min	14h	—
DISTANCE	23ft (7m)	52ft (16m)	98ft (30m)	—	—
INTENSITY	12cd	64cd	225cd	—	—
IMPACT RESISTANCE	1m				
WATERPROOF	IP24, splash proof				
SIZE	Length: 3.43" (87mm) Width: 1.46" (37mm) Height: 0.31" (8mm)				
WEIGHT	1.31 oz. (37g) including battery				


E-LITE

150 LUMENS



OPTIONAL ACCESSORIES

◆ None



- ◆ Max 150 lumens from the built-in 275mAh li-polymer battery
- ◆ Seven lighting modes including three brightness levels, red, red flash, blue, and blue flash
- ◆ USB Type-C rechargeable
- ◆ Integrated clip to attach the light to your hat, pocket, or pack

ANSI/PLATO FL1	Low	Med	High	Red	Red Flash	Blue	Blue Flash
OUTPUT LUMENS	5	45	150	3	3	3	3
RUNTIME	20h	4h 20min	1h 40min*	8h	22h	8h	22h
DISTANCE	30ft (9m)	72ft (22m)	131ft (40m)	23ft (7m)	23ft (7m)	23ft (7m)	23ft (7m)
INTENSITY	20cd	121cd	410cd	—	—	—	—
IMPACT RESISTANCE	1m						
DUSTPROOF/ WATERPROOF	IP66, rain/splash proof / dustproof						
SIZE	Length: 2.05" (52mm) Width: 0.91" (23mm) Height: 0.79" (20mm)						
WEIGHT	0.63oz. (18g) including battery						

E01 v2.0

100 LUMENS



OPTIONAL ACCESSORIES

◆ None

- ◆ Max 100 lumen output from one included AAA battery
- ◆ Twist head for on/off and to choose between three brightness levels
- ◆ Ultra-compact, all-metal CNC machined body

ANSI/PLATO FL1	Low	Medium	High
OUTPUT LUMENS	5	25	100
RUNTIME	Alkaline	25h	4h 50min
	Ni-MH	23h	4h 30min
DISTANCE	30ft (9m)	62ft (19m)	115ft (35m)
INTENSITY	21cd	88cd	304cd
IMPACT RESISTANCE	1m		
DUSTPROOF/ WATERPROOF	IP68, dustproof/waterproof underwater to 2m		
SIZE	Length: 2.62" (66.5mm) Head: 0.59" (15mm) Body: 0.55" (14mm)		
WEIGHT	0.46 oz. (13g) excluding battery		

E02R

200 LUMENS



ANSI/PLATO FL1	Low	High
OUTPUT LUMENS	15	200*
RUNTIME	6h 30min	25min
DISTANCE	43ft (13m)	161ft (49m)
INTENSITY	39cd	591cd
IMPACT RESISTANCE	1m	
DUSTPROOF/WATERPROOF	IP68, dustproof/waterproof underwater to 2m	
SIZE	Length: 1.89" (48mm) Head: 0.59" (15mm) Body: 0.55" (14mm)	
WEIGHT	0.53 oz. (15g) including battery	



OPTIONAL ACCESSORIES
♦ None

- ♦ Max 200 lumen output from the built-in 120 mAh li-polymer battery
- ♦ Twist head for on/off and to choose between two brightness levels
- ♦ Micro USB charging port for direct charging

E03R

260 LUMENS



OPTIONAL ACCESSORIES
♦ None




- ♦ Max 260 lumen output from the built-in 200mAh Li-polymer battery
- ♦ Six modes including four brightness levels, red light, and red flashing
- ♦ USB Type-C rechargeable with battery level indicator
- ♦ All-metal CNC machined light-weight body

ANSI/PLATO FL1	Eco	Low	Med	High	Red	Red Flash
OUTPUT LUMENS	5	30	80	260	4	4
RUNTIME	18h	3h	1h 15min	45min*	5h 30min	—
DISTANCE	23ft (7m)	52ft (16m)	82ft (25m)	138ft (42m)	33ft (10m)	—
INTENSITY	13cd	64cd	156cd	441cd	25cd	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP66, dustproof/rainproof					
SIZE	Length: 1.85" (47mm) Width: 0.94" (24mm) Height: 0.47" (12mm)					
WEIGHT	0.78 oz. (22g) including battery					

E05R

400 LUMENS



- ◆ Max 400 lumen output from the built-in 320mAh battery
- ◆ Three brightness levels plus a Burst mode for short blasts at 400 lumens
- ◆ Micro-USB rechargeable with hidden port
- ◆ Metal side switch operates all modes

OPTIONAL ACCESSORIES

- ◆ None

ANSI/PLATO FL1	Low	Medium	High	Burst
OUTPUT LUMENS	3	25	150	400
RUNTIME	30h	5h	55min*	—
DISTANCE	26ft (8m)	56ft (17m)	131ft (40m)	210ft (64m)
INTENSITY	15cd	72cd	412cd	1046cd
IMPACT RESISTANCE	1m			
DUSTPROOF/WATERPROOF	IP68, dustproof/submersible underwater to 2m			
SIZE	Length: 2.68" (68mm) Head: 0.60" (15.3mm) Body 0.59" (15mm)			
WEIGHT	0.85 oz. (24g) including battery			

E09R

600 LUMENS



- ◆ Max 600 lumen output from the built-in 800mAh battery
- ◆ Four brightness levels plus a Burst mode for short blasts at 600 lumens
- ◆ USB Type-C rechargeable with hidden port
- ◆ Metal side switch operates all modes

OPTIONAL ACCESSORIES

- ◆ None

ANSI/PLATO FL1	Moonlight	Low	Medium	High	Burst
OUTPUT LUMENS	3	25	100	300	600
RUNTIME	70h	16h	4h	1h 30min*	—
DISTANCE	30ft (9m)	92ft (28m)	184ft (56m)	299ft (91m)	407ft (124m)
INTENSITY	20cd	192cd	777cd	2084cd	3970cd
IMPACT RESISTANCE	1m				
DUSTPROOF/WATERPROOF	IP68, dustproof/submersible underwater to 2m				
SIZE	Length: 3.11" (79mm) Head: 0.76" (19.3mm) Body: 0.72" (18.4mm)				
WEIGHT	1.59 oz. (45g) excluding battery				

BEST SELLER

E12 v2.0

160 LUMENS



- ♦ Max 160 lumen output from one included AA battery
- ♦ Tail switch operates three brightness levels
- ♦ Two-position body clip
- ♦ Automobile ultra-thin optical lens



OPTIONAL ACCESSORIES

- ♦ ALB-10 Bike Mount

MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATER PROOF
Low	5	70h	39ft (12m)	31cd	1m	IP68, waterproof underwater to 2m/ dustproof
Medium	30	13h	92ft (28m)	185cd		
High	160	1h	223ft (68m)	1133cd		
SIZE	Length: 3.06" (76.6mm) Head: 0.75" (19mm) Body: 0.69" (17.6mm)					
WEIGHT	0.96 oz. (27.3g) excluding battery					

BEST SELLER

E18R v2.0

1200 LUMENS



OPTIONAL ACCESSORIES

- ♦ ARB-L16 Battery
- ♦ ALB-10 Bike Mount
- ♦ AOD-S V2.0 Diffuser Tip

- ♦ Max 1200 lumen output from one included 16340 Li-ion battery
- ♦ USB Type-C charging with battery level indicator
- ♦ Easy and fast operation with a single switch
- ♦ Magnetic tail for hands-free use
- ♦ Made of A6061-T aluminum with type HAIII hard-anodized anti-abrasive finish

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATER PROOF
Moonlight	1	200h	30ft (9m)	4cd	1m	IP68, waterproof underwater to 2m/ dustproof
Low	30	15h	75ft (23m)	137cd		
Medium	150	2h 30min	174ft (53m)	714cd		
High	350	1h 20min	266ft (81m)	1661cd		
Turbo	1200	30min*	479ft (146m)	5397cd		
Strobe	1200	—	—	—		
SIZE	Length: 2.64" (67mm) Diameter: 0.87" (22mm)					
WEIGHT	1.98 oz. (56g) including battery					

E20 v2.0

350 LUMENS



- ♦ Max 350 lumen output from two AA batteries
- ♦ Four brightness levels
- ♦ Tactical tail switch operates on/off and brightness levels
- ♦ Handy and compact for everyday carry



OPTIONAL ACCESSORIES

- ♦ ALB-10 Bike Mount
- ♦ AOD-S Diffuser Tip
- ♦ AOT-S Traffic Wand

ANSI/PLATO FL1		Eco	Low	Med	High
OUTPUT LUMENS		5	30	150	350
RUNTIME	Alkaline	200h	93h 35min	11h 15min	3h 45min*
	Ni-Mh	140h	34h 30min	5h 30min	1h 30min
DISTANCE		49ft (15m)	115ft (35m)	249ft (76m)	413ft (126m)
INTENSITY		44cd	288cd	1448cd	3950cd
IMPACT RESISTANCE		1m			
WATERPROOF		IP68, dustproof/waterproof underwater to 2m			
SIZE		Length: 5.0" (127mm) Body: 0.7" (16.8mm) Head: 0.8" (21mm)			
WEIGHT		1.5 oz. (42g) excluding batteries			

E28R

1500 LUMENS



- ♦ Max 1500 lumen output from one 18650 rechargeable Li-ion battery (included) or two CR123A batteries
- ♦ Six modes including five brightness levels and strobe
- ♦ USB Type-C charging with battery level indicator



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ CR123A Battery
- ♦ ALB-10 Bike Mount
- ♦ ALP-10S Holster
- ♦ AOD-S V2.0 Diffuser Tip

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
LUMENS	30	150	350	800	1500	1500
RUNTIME	73h 35min	17h 15min	6h	2h 30min	2h 5min*	—
DISTANCE	92ft (28m)	200ft (61m)	295ft (90m)	459ft (140m)	656ft (200m)	—
INTENSITY	189cd	894cd	1970cd	4574cd	9433cd	—
IMPACT	Resistant to 1m					
WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 4.29" (109mm) Body: 0.89" (22.6mm) Head: 1.04" (26.5mm)					
WEIGHT	2.33 oz. (66g) excluding batteries					

E35 v3.0

3000 LUMENS



- ♦ Max 3000 lumen output from one 21700 rechargeable Li-ion battery (included)
- ♦ Six modes including five brightness levels and strobe
- ♦ Metal side switch for all functions
- ♦ Battery level indicator



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ CR123A Battery
- ♦ ALB-10 Bike Mount
- ♦ ALF-18 Battery Holder
- ♦ ALP-10S Holster
- ♦ AOD-S V2.0 Diffuser Tip

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
LUMENS	50	150	450	1200	3000	3000
RUNTIME	50h	20h	7h	2h 40min*	1h 15min*	—
DISTANCE	98ft (30m)	164ft (50m)	295ft (90m)	492ft (150m)	787ft (240m)	—
INTENSITY	225cd	625cd	2025cd	5625cd	14400cd	—
IMPACT	Resistant to 1m					
WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 4.65" (118mm) Diameter: 1.04" (26.5mm)					
WEIGHT	2.36 oz. (67g) excluding battery					



GL19R

1200 LUMENS



ANSI/PLATO FL1	Turbo	High	Strobe
OUTPUT LUMENS	1200	350	1200
RUNTIME	1h*	2h	—
DISTANCE	689ft (210m)	361ft (110m)	—
INTENSITY	11000cd	3000cd	—
IMPACT RESISTANCE	1m		
WATERPROOF	IP68, dustproof/waterproof underwater to 2m		
SIZE	Length: 3.04" (77.3mm) Width: 1.19" (30.2mm) Height: 1.35" (34.2mm)		
WEIGHT	3.53 oz. (100g) including battery		



OPTIONAL ACCESSORIES

◆ ARB-L18-1000P

- ◆ Max 1200 lumens from one included 18350 rechargeable li-ion battery
- ◆ Three lighting modes including two brightness levels and strobe
- ◆ Ambidextrous operation with dual switches
- ◆ Fits most full size pistols with a Glock or MIL-STD-1913 (Picatinny) rail

GL22

750 LUMENS



- ◆ Max 750 lumens from one included 16340 rechargeable li-ion battery or one CR123A lithium battery
- ◆ Three lighting modes including white light, white light and red laser, red laser only, and strobe
- ◆ Ambidextrous operation with dual switches
- ◆ Fits most full size pistols with a Glock or MIL-STD-1913 (Picatinny) rail

OPTIONAL ACCESSORIES


◆ ARB-L16 Battery



ANSI/PLATO FL1	Battery	White Light	Red Laser	Strobe
OUTPUT LUMENS	ARB-L16-700UP	750	—	750
	CR123A	500	—	500
RUNTIME	ARB-L16-700UP	35min*	17h	—
	CR123A	1h	24h	—
DISTANCE	ARB-L16-700UP	591ft (180m)	—	—
	CR123A	459ft (140m)	—	—
INTENSITY	ARB-L16-700UP	8000cd	—	—
	CR123A	5000cd	—	—
IMPACT RESISTANCE	1m			
WATERPROOF	IP66, dustproof/heavy rain and splash proof			
SIZE	Length: 2.64" (67mm) Width: 1.22" (31mm) Height: 1.65" (42mm)			
WEIGHT	3.32 oz. (94g) including battery			

HT18

1500 LUMENS



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ ARB-L21 Battery
- ♦ AER-04 Remote Switch
- ♦ AER-05 Remote Switch
- ♦ ALB-10 Bike Mount
- ♦ ALF-18 Battery Holder

- ♦ Max 1500 lumen output from one 21700 (included) or one 18650 rechargeable li-ion battery
- ♦ Five lighting modes including four brightness levels and strobe
- ♦ Tactical tail switch and mode selecting side switch
- ♦ Extremely long beam distance
- ♦ Red and green filters included

ANSI/PLATO FL1		Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	21700	30	150	500	1500	1500
	18650	30	150	500	1100	1100
RUNTIME	21700	61h	20h 15min	4h 15min	1h 40min*	–
	18650	53h	14h 10min	2h 50min	1h 40min*	–
DISTANCE	21700	525ft (160m)	984ft (300m)	1870ft (570m)	3035ft (925m)	–
	18650	525ft (160m)	984ft (300m)	1870ft (570m)	2641ft (805m)	–
INTENSITY	21700	6379cd	21567cd	80877cd	214187cd	–
	18650	6379cd	21567cd	80877cd	162682cd	–
IMPACT RESISTANCE		1m				
WATERPROOF		IP68, waterproof underwater to 2m/dustproof				
SIZE		Length: 7.2" (184mm) Body: 1.0" (26mm) Head: 2.7" (68mm)				
WEIGHT		7.8 oz (220g) excluding battery				

HT30R

500 LUMENS



- ♦ Max 500 lumen output from the included 21700 rechargeable Li-ion battery
- ♦ Three modes including two brightness levels and strobe
- ♦ Class 1 laser emits a broad spectrum white light, similar to the LED spectrum, but eliminates the harmful beam a monochromatic light produces.
- ♦ Dual tail switches for easy operation

OPTIONAL ACCESSORIES

- ♦ ARB-L21 Battery
- ♦ AER-04 Remote Switch
- ♦ AER-05 Remote Switch
- ♦ ALB-10 Bike Mount
- ♦ ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- ♦ AOT-L Traffic Wand
- ♦ AOD-M Diffuser Tip
- ♦ AOFL Filter Adapter


ANSI/PLATO FL1	Low	High	Strobe
OUTPUT LUMENS	100	500	500
RUNTIME	7hr 15min	2h 20min*	–
DISTANCE	2067ft (630m)	4921ft (1500m)	–
INTENSITY	100000cd	600000cd	–
IMPACT RESISTANCE	1m		
WATERPROOF/DUSTPROOF	IP68, dustproof/waterproof underwater to 2m		
SIZE	Length: 7.05" (179mm) Head: 1.57" (40mm) Body: 1.02" (26mm)		
WEIGHT	9.31 oz. (264g) including battery		

LD15R

500 LUMENS



- ◆ Max 500 lumen output from one 16340 rechargeable Li-ion battery (included) or a CR123A lithium battery
- ◆ Seven modes including four brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator
- ◆ Two-way body clip and magnetic tail



OPTIONAL ACCESSORIES

- ◆ ARB-L16 Battery

ANSI/PLATO FL1	Low	Med	High	Turbo	Red Light
OUTPUT LUMENS	3	30	150	500	4
RUNTIME	110h	13h 20min	2h 50min	1h 20min*	30h
DISTANCE	20ft (6m)	75ft (23m)	151ft (46m)	279ft (85m)	16ft (5m)
INTENSITY	9cd	135cd	530cd	1800cd	6cd
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater 2m, dustproof				
SIZE	Length: 2.8" (70mm) Diameter: 0.75" (19mm)				
WEIGHT	1.4 oz. (40g) weight excluding battery				

LD22 v2.0

800 LUMENS



- ◆ Max 800 lumen output from the included rechargeable li-ion battery pack or 350 lumens from two AA batteries
- ◆ Seven lighting modes including five brightness levels, strobe, and SOS
- ◆ Included USB Type-C rechargeable battery pack
- ◆ Tail switch and side switch operation



OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ AOD-S V2.0 Diffuser Tip
- ◆ AOT-S Traffic Wand

ANSI/PLATO FL1		Eco	Low	Medium	High	Turbo
OUTPUT LUMENS	AA	2	30	100	350	—
	Pack	2	30	100	350	800
RUNTIME	AA	190h	19h 45min	5h 50min	1h 15min	—
	Pack	220h	22h 20min	7h	1h 40min	54min*
DISTANCE		36ft (11m)	141ft (43m)	249ft (76m)	466ft (142m)	702ft (214m)
INTENSITY		30cd	460cd	1440cd	5000cd	11500cd
IMPACT RESISTANCE		1m				
WATERPROOF		IP68, waterproof underwater to 2m/dustproof				
SIZE		Length: 5.83" (148mm) Body: 0.85" (21.5mm) Head: 0.71" (18mm)				
WEIGHT		3.39 oz. (96g) including battery				

BEST SELLER

LD30

1600 LUMENS



- ◆ Max 1600 lumen output from one 18650 li-ion battery or two CR123A lithium batteries in an emergency
- ◆ Seven lighting modes including five brightness levels, strobe and SOS
- ◆ Tactical tail switch and mode selecting side switch
- ◆ Battery level indicator
- ◆ Two-position body clip



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ CR123A Battery
- ◆ ALP-10S Holster
- ◆ AOFs+ Filter Adapter
- ◆ AOD-S V2.0 Diffuser Tip
- ◆ AOT-S Traffic Wand

ANSI/PLATO FL1	Eco	Low	Med	High	Turbo	Strobe	SOS
OUTPUT LUMENS	30	150	350	800	1600	1600	30
RUNTIME	70h 30min	17h 30min	5h 30min	1h 55min	1h 30min*	—	—
DISTANCE	82ft (25m)	197ft (60m)	312ft (95m)	492ft (150m)	673ft (205m)	—	—
INTENSITY	192cd	950cd	2151cd	5798cd	10302cd	—	—
IMPACT RESISTANCE	1m						
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof						
SIZE	Length: 4.3" (109mm) Body: 0.9" (21.5mm) Head: 1.0" (25.4mm)						
WEIGHT	2.1 oz. (59g) excluding battery						

BEST SELLER

LR35R

10000 LUMENS



- ♦ Max 10000 lumen output from two included 21700 rechargeable li-ion batteries
- ♦ Six modes including five brightness levels and strobe
- ♦ USB Type-C rechargeable with battery level indicator
- ♦ Intelligent overheat protection against high temperatures



OPTIONAL ACCESSORIES

- ♦ ARB-L21 Battery

ANSI/PLATO FL1	Eco	Low	Med	High	Turbo	Strobe
OUTPUT LUMENS	50	450	1200	3000	10000	10000
RUNTIME	80h	8h 20min	3h 15min	1h 35min*	1h 25min*	—
DISTANCE	98ft (30m)	344ft (105m)	558ft (170m)	886ft (270m)	1640ft (500m)	—
INTENSITY	256cd	2686cd	7078cd	18020cd	63200cd	—
IMPACT RESISTANCE	1m					
WATERPROOF/DUSTPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 5.5" (140mm) Head: 2.0" (51.5mm) Height: 1.8" (46.5mm)					
WEIGHT	8.4 oz. (239g) excluding batteries					

LR40R

12000 LUMENS



MODE		OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATER PROOF		
SPOTLIGHT	Low	50	92h 18min	535ft (163m)	6608cd	1m	IP68, dustproof/ waterproof underwater to 2m		
	Med	150	44h 31min	863ft (263m)	17239cd				
	High	350	22h 30min	1316ft (401m)	40105cd				
	Turbo	1000	7h	2100ft (640m)	101960cd				
FLOODLIGHT	Low	350	22h 44min	213ft (65m)	915cd				
	Med	1000	7h 15min	377ft (115m)	3142cd				
	High I	3000	2h 50min	656ft (200m)	9830cd				
	High II	6000	2h	968ft (295m)	21510cd				
	Turbo	11000	45min	1345ft (410m)	41867cd				
	Strobe	3000	—	—	—				
	SOS	350	—	—	—				
SIZE	Length: 6.1" (154mm) Width: 3.2" (80mm) Height: 2.0" (51mm)								
WEIGHT	17.6 oz. (500g) excluding batteries								

- ♦ Max 12000 lumen output from the included Li-ion battery pack; one to four 18650 batteries can be used in an emergency.
- ♦ Eleven modes including four spotlight levels, five floodlight modes, strobe, and SOS
- ♦ Fast USB Type-C charging and discharge
- ♦ Stainless steel side switches. Quickly choose spotlight/floodlight modes or both




OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery

BEST SELLER

LR50R

12000 LUMENS



OPTIONAL ACCESSORIES


- ◆ ARB-L21 Battery

- ◆ Max 12000 lumen output from the included Li-ion battery pack; one to four 21700 batteries can be used in an emergency
- ◆ Eight modes including two operating modes, six brightness levels, strobe, and SOS
- ◆ USB Type-C charging and discharge for charging mobile devices
- ◆ Intelligent brightness downshifting sensor to avoid dangers due to high temperature

MODE		OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATER PROOF
GENERAL MODE	Eco	50	58h	230ft (70m)	1200cd	1m	IP68, dustproof/ waterproof underwater to 2m
	Low	350	24h	541ft (165m)	6850cd		
	Med	1000	7h 40min	919ft (280m)	19800cd		
	High I	3000	2h 40min	1575ft (480m)	58200cd		
	High II	6000	2h 20min*	2264ft (690m)	118400cd		
	Turbo	12000	1h 50min*	3117ft (950m)	225750cd		
TAC MODE	Turbo	12000	1h 50min*	3117ft (950m)	225750cd		
	Strobe	6000	—	—	—		
	SOS	350	—	—	—		
SIZE		Length: 6.42" (163mm) Width: 3.46" (88mm) Height: 2.36" (60mm)					
WEIGHT		34.8 oz. (986g) including battery					

LR80R

18000 LUMENS



- ◆ Max 18000 lumen output from the built-in 7.2V/12000mAh Li-ion battery pack
- ◆ Dual switch controls two modes; four brightness levels for High-Output Mode and six modes for Low-Output Mode which includes four brightness levels, strobe, and SOS
- ◆ USB Type-C Rechargeable with 45W fast charging

ANSI/PLATO FL1					
MODE		OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY
High-Output Mode	Low	3000	5h10min	1526ft (465m)	54000cd
	Medium	6000	2h 50min	2133ft (650m)	105000cd
	High	12000	2h 15min	3018ft (920m)	211700cd
	Turbo	18000	2h*	3707ft (1130m)	318000cd
Low-Output Mode	Eco	50	300h	164ft (50m)	590cd
	Low	150	92h	344ft (105m)	2700cd
	Medium	450	39h	574ft (175m)	7550cd
	High	1000	15h 40min	869ft (265m)	17750cd
	Strobe	6000	—	—	—
	SOS	150	—	—	—
IMPACT RESISTANCE		1m			
DUSTPROOF/ WATERPROOF		IP68, dustproof/submersible underwater to 2m			
SIZE		Length: 10.2" (259mm) Head: 4.25" (108mm) Body: 2.13" (54mm)			
WEIGHT		57.7 oz. (1636g) including battery			

COMING SOON

Fenix is always striving to be at the forefront of technology and innovation—pushing the envelope as to what's possible in today's lighting products. Here are some of the new lights you can expect to see in 2023.

CL28R 2000 LUMENS



MAX LUMENS	2000
MAX DISTANCE	190ft (58m)
MAX RUNTIME	360 hours
IMPACT RESISTANCE	1m
WATERPROOF	IP66, dustproof/rain, heavy splash proof

E03R v2.0 500 LUMENS



MAX LUMENS	500
MAX DISTANCE	262ft (80m)
MAX RUNTIME	32 hours
IMPACT RESISTANCE	1m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

E35R 3100 LUMENS



MAX LUMENS	3100
MAX DISTANCE	853ft (260m)
MAX RUNTIME	70 hours
IMPACT RESISTANCE	1m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

GL06 500 LUMENS



MAX LUMENS	500
MAX DISTANCE	394ft (120m)
MAX RUNTIME	50 minutes
IMPACT RESISTANCE	1m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

HL16 450 LUMENS



MAX LUMENS	450
MAX DISTANCE	341ft (104m)
MAX RUNTIME	100 hours
IMPACT RESISTANCE	2m
WATERPROOF	IP66, dustproof/rain, heavy splash proof

HL32R-T

800 LUMENS



MAX LUMENS	800
MAX DISTANCE	410ft (125m)
MAX RUNTIME	150 hours
IMPACT RESISTANCE	2m
WATERPROOF	IP66, dustproof/rain, heavy splash proof

HM61R v2.0

1600 LUMENS



MAX LUMENS	1600
MAX DISTANCE	531ft (162m)
MAX RUNTIME	300 hours
IMPACT RESISTANCE	2m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

HM71R

2700 LUMENS



MAX LUMENS	2700
MAX DISTANCE	623ft (190m)
MAX RUNTIME	400 hours
IMPACT RESISTANCE	2m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

LR40R v2.0

15000 LUMENS



MAX LUMENS	15000
MAX DISTANCE	3281ft (1000m)
MAX RUNTIME	26h 40min
IMPACT RESISTANCE	1m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

PD35R

1700 LUMENS



MAX LUMENS	1700
MAX DISTANCE	1158ft (353m)
MAX RUNTIME	100 hours
IMPACT RESISTANCE	1m
WATERPROOF	IP68, dustproof/waterproof underwater to 2m

2023

BEST SELLER

PD25R

800 LUMENS



- ♦ Max 800 lumen output from one included 16340 rechargeable li-ion battery or one CR123A lithium battery
- ♦ Six lighting modes including five brightness levels and strobe
- ♦ Single tail switch activation with side switch control for the lighting modes
- ♦ USB Type-C rechargeable via the hidden charging port

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	5	30	150	350	800	800
RUNTIME	70h	16h	2h 50min	1h 30min	44min*	—
DISTANCE	62ft (19m)	157ft (48m)	351ft (107m)	538ft (164m)	820ft (250m)	—
INTENSITY	90cd	580cd	2860cd	6750cd	15530cd	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 3.62" (92mm) Diameter: 0.94" (24mm)					
WEIGHT	2.75 oz. (78g) including battery					

OPTIONAL ACCESSORIES

- ♦ ARB-L16 Battery
- ♦ CR123A Battery
- ♦ ALB-10 Bike Mount
- ♦ AOD-S Diffuser Tip



PD32 V2.0

1200 LUMENS



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ CR123A Battery
- ♦ AER-02 V2.0 Remote Switch
- ♦ ALB-10 Bike Mount
- ♦ ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- ♦ ALP-10S Holster
- ♦ AOFs+ Filter Adapter
- ♦ AOD-S V2.0 Diffuser Tip
- ♦ AOT-S Traffic Wand




- ♦ Max 1200 lumen output from one 18650 li-ion battery or two CR123A batteries
- ♦ Four modes including three brightness levels and strobe
- ♦ Multi-functional tail switch operates on/off and all lighting modes
- ♦ High performance and far-reaching beam

ANSI/PLATO FL1	Low	Medium	High	Strobe
OUTPUT LUMENS	30	350	1200	1200
RUNTIME	82h	5h 20min	2h 40min*	—
DISTANCE	180ft (55m)	715ft (218m)	1295ft (395m)	—
INTENSITY	760cd	11900cd	39000cd	—
IMPACT RESISTANCE	1m			
WATERPROOF	IP68, waterproof underwater to 2m/dustproof			
SIZE	Length: 5.09" (129.4mm) Body: 0.93" (23.6mm) Head: 1.0" (25.4mm)			
WEIGHT	2.89 oz. (82g) weight excluding battery			

BEST SELLER

PD35 v3.0

1700 LUMENS



- ◆ Upgrade of one of Fenix's best selling flashlights
- ◆ Max 1700 lumens from one included 18650 rechargeable li-ion battery
- ◆ Max 230 hour runtime
- ◆ Boot-up battery level indicator

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ CR123A Battery
- ◆ AER-02 V2.0 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10S Holster
- ◆ AOF-S+ Filter Adapter
- ◆ AOD-S V2.0 Diffuser Tip
- ◆ AOT-S Traffic Wand

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	5	50	150	600	1700*	1700
RUNTIME	230h	26h 25min	8h 30min	2h 35min	1h 25min	—
DISTANCE	66ft (20m)	207ft (63m)	358ft (109m)	709ft (216m)	1171ft (357m)	—
INTENSITY	100cd	1000cd	3000cd	11700cd	31900cd	—
IMPACT RESISTANCE	1m					
WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 5.28" (134mm) Body: 1.00" (25.4mm) Head: .9" (22.8mm)					
WEIGHT	2.95 oz. (83.5g) excluding battery					

BEST SELLER

PD36R

1600 LUMENS



- ◆ Max 1600 lumen output from one high-capacity 21700 rechargeable Li-ion battery (included)
- ◆ Six modes including five brightness levels and strobe
- ◆ Fast USB Type-C rechargeable with battery level indicator
- ◆ Tactical tail switch and mode selecting side switch
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L21 Battery
- ◆ ALB-10 Bike Mount
- ◆ ALF-18 Battery Holder
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10S Holster
- ◆ AOD-S V2.0 Diffuser Tip

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	30	150	350	800	1600	1600
RUNTIME	115h	26h	8h 24min	5h 49min	2h 50min*	—
DISTANCE	115ft (35m)	269ft (82m)	420ft (128m)	646ft (197m)	928ft (283m)	—
INTENSITY	309cd	1681cd	4101cd	9636cd	19977cd	—
IMPACT RESISTANCE	1m					
DUSTPROOF/ WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 5.4" (136mm) Body: 1.0" (25.4mm) Head: 1.0" (26.4mm)					
WEIGHT	3.0 oz. (85g) excluding battery					

BEST SELLER

NEW

PD36R PRO

2800 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L21 Battery
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10L Holster
- ◆ AOD-S V2.0 Diffuser Tip


- ◆ Max 2800 lumen output from one included 21700 li-ion rechargeable battery
- ◆ Six lighting modes including five brightness levels and strobe
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Dual tail switch design controls on/off and all lighting modes



ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	30	150	350	1000	2800	2500
RUNTIME	42h	19h	8h 15min	3h 55min	3h 30min*	—
DISTANCE	131ft (40m)	295ft (90m)	427ft (130m)	738ft (225m)	1247ft (380m)	—
INTENSITY	400cd	1900cd	4300cd	12800cd	36600cd	—
IMPACT RESISTANCE	1m					
WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 5.74" (145.8mm) Head: 1.04" (26.5mm) Body: 1.01" (25.7mm)					
WEIGHT	5.96 oz. (169g) including battery					

PD36 TAC

3000 LUMENS



- ◆ Max 3000 lumen output from one included 21700 rechargeable li-ion battery
- ◆ Two operating modes; Tactical operates high and strobe, Duty operates five brightness levels and strobe
- ◆ Rotary mode switch with lock-out function and tactical tail switch

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L21 Battery
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALF-18 Battery Holder
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10L Holster
- ◆ AOD-S V2.0 Diffuser Tip

ANSI/PLATO FL1	Tactical Mode		Duty Mode					
	High	Strobe	Eco	Low	Med	High	Turbo	Strobe
OUTPUT LUMENS	2000	2000	30	150	350	1000	3000	2000
RUNTIME	3h 10min	—	43h 10min	18h 45min	10h 10min	3h 15min	1hr 30min*	—
DISTANCE	738ft (225m)	—	82ft (25m)	194ft (59m)	302ft (92m)	525ft (160m)	899ft (274m)	—
INTENSITY	12600cd	—	160cd	900cd	2100cd	6400cd	18700cd	—
IMPACT RESISTANCE	1m							
DUSTPROOF/WATERPROOF	IP68, dustproof/submersible underwater to 2m							
SIZE	Length: 5.51" (140mm) Head: 1.04" (26.5mm) Body: 1.00" (25.4mm)							
WEIGHT	3.24 oz. (92g) excluding battery							

PD40R v2.0

3000 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L21 Battery
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Bike Clip
- ◆ ALF-18 Battery Holder
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10L Holster
- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand



ANSI/PLATO FL1	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	30	350	1000	3000	2500
RUNTIME	88h 10min	8h 30min	3h 10min	2h 40min*	—
DISTANCE	148ft (45m)	449ft (137m)	755ft (230m)	1329ft (405m)	—
INTENSITY	507cd	4687cd	13256cd	40567cd	—
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater to 2m/dustproof				
SIZE	Length: 5.4" (138mm) Body: 1.0" (26mm) Head: 1.3" (33.2mm)				
WEIGHT	4.1 oz. (117g) weight excluding battery				

- ◆ Max 3000 lumen output from one high-capacity 21700 rechargeable Li-ion battery (included)
- ◆ Patented rotary switch allows quick access to five modes including four brightness levels and strobe
- ◆ Fast USB Type-C rechargeable with battery level indicator

NEW T6

80 LUMENS



OPTIONAL ACCESSORIES

- ◆ None



ANSI/PLATO FL1	Low	Medium	High
OUTPUT LUMENS	1	20	80
RUNTIME	26h	2h 30min	40min*
DISTANCE	16ft (5m)	39ft (12m)	59ft (18m)
INTENSITY	1cd	22cd	82cd
IMPACT RESISTANCE	1m		
WATERPROOF/DUSTPROOF	IP66 dustproof/heavy splash resistant		
SIZE	Length: 5.51" (140mm) Diameter: 0.55" (14mm)		
WEIGHT	1.16 oz. (33g) including battery		

- ◆ Max 80 lumen output from the built-in 100mAh li-polymer battery
- ◆ Three brightness levels
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Glass breaking bead tip made of silicon nitride

BEST SELLER

TK16 v2.0

3100 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L21 Battery
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Bike Clip
- ◆ ALF-18 Battery Holder
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10L Holster
- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand



- ◆ Max 3100 lumen output from one included 21700 rechargeable li-ion battery
- ◆ Six lighting modes including five brightness levels and strobe
- ◆ Dual tactical tail switches operate instant activation and all lighting modes
- ◆ Stainless steel strike bezel with tungsten steel breaking tips

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	30	150	350	1000	3100	3100
RUNTIME	43h 20min	19h 10min	8h 20min	2h 50min	2h 40min*	—
DISTANCE	131ft (40m)	262ft (80m)	410ft (125m)	722ft (220m)	1247ft (380m)	—
INTENSITY	330cd	1650cd	3900cd	12000cd	36100cd	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 5.63" (143mm) Body: 1.34" (34mm) Head: 1.0" (25.4mm)					
WEIGHT	3.95 oz. (112g) excluding battery					

BEST SELLER

TK20R v2.0

3000 LUMENS



- ◆ Max 3000 lumen output from one included 21700 rechargeable li-ion battery
- ◆ Six lighting modes including five brightness levels and strobe
- ◆ Dual tactical tail switches operate instant activation and all lighting modes
- ◆ USB Type-C rechargeable via the hidden charging port

OPTIONAL ACCESSORIES

- ◆ ARB-L21 Battery
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Bike Clip
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ ALP-10L Holster
- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand

ANSI/PLATO FL1	Eco	Low	Medium	High	Turbo	Strobe
OUTPUT LUMENS	30	150	350	1000	3000	3000
RUNTIME	48h	21h 20min	7h	3h 10min	2h 50min*	—
DISTANCE	148ft (45m)	328ft (100m)	492ft (150m)	869ft (265m)	1558ft (475m)	—
INTENSITY	490cd	2500cd	5860cd	17620cd	56600cd	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 6.02" (153mm) Head: 1.34" (34mm) Body: 1.0" (25.4mm)					
WEIGHT	7.2 oz. (204g) including battery					

TK22 TAC

2800 LUMENS



- ◆ Max 2800 lumen output from one included 21700 rechargeable li-ion battery
- ◆ Two operating modes; Tactical operates Turbo and strobe, Duty operates four brightness levels and strobe
- ◆ Rotary mode switch with lock-out function and tactical tail switch

OPTIONAL ACCESSORIES

- ◆ ARB-L21 Battery
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Bike Clip
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ AOFL Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-L Traffic Wand

ANSI/PLATO FL1	Tactical Mode		Duty Mode				
	Turbo	Strobe	Eco	Low	Med	High	Strobe
OUTPUT LUMENS	2800	2500	30	150	350	1000	2500
RUNTIME	3h*	—	49h 30min	18h 30min	8h 10min	4h*	—
DISTANCE	1772ft (540m)	—	180ft (55m)	394ft (120m)	617ft (188m)	1033ft (315m)	—
INTENSITY	74000cd	—	760cd	3560cd	8850cd	24800cd	—
IMPACT RESISTANCE	1m						
DUSTPROOF/WATERPROOF	IP68, dustproof/submersible underwater to 2m						
SIZE	Length: 6.06" (154mm) Head: 1.57" (40mm) Body: 1.02" (26mm)						
WEIGHT	5.5 oz. (156g) excluding battery						

TK26R

1500 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ CR123A Battery
- ◆ AER-03 V2.0 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Bike Clip
- ◆ ALG-00 Rail Mount
- ◆ ALG-15 Rail Mount
- ◆ ALG-16 Rail Mount
- ◆ ALG-18 Rail Mount
- ◆ AOFL Filter Adapter
- ◆ AOT-L Traffic Wand
- ◆ AOT-02 Traffic Wand

- ◆ Max 1500 lumen output from an included 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Seven modes including four white levels, strobe, red light, and green light
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Tactical tail switch, color switch, and side mode switch



ANSI/PLATO FL1	Low	Med	High	Turbo	Turbo	Red	Green
OUTPUT LUMENS	10	150	350	1500	1500	150	200
RUNTIME	100h	10h 50min	4h 40min	1h 25min*	—	4h 20min	5h 10min
DISTANCE	98ft (30m)	361ft (110m)	558ft (170m)	1148ft (350m)	—	98ft (30m)	131ft (40m)
INTENSITY	213cd	3102cd	7112cd	30150cd	—	218cd	452cd
IMPACT RESISTANCE	1m						
WATERPROOF	IP68, dustproof/waterproof underwater to 2m						
SIZE	Length: 5.9" (150mm) Width: 1.6" (40mm) Height: 1.0" (25.4mm)						
WEIGHT	5.5 oz. (157g) excluding battery						

TK30

WHITE LASER FLASHLIGHT



- ♦ Max 500 lumen output from the included 21700 rechargeable Li-ion battery or an 18650 Li-ion battery with the ALF-18 Battery Holder (not included)
- ♦ Three modes including two brightness levels and strobe
- ♦ Class 3B laser stimulates a fluorescent crystal to create a broad spectrum white light
- ♦ Tactical tail switch for instant activation

OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ ARB-L21 Battery
- ♦ AER-04 Remote Switch
- ♦ ALB-10 Bike Mount
- ♦ ALC-01 Bike Clip
- ♦ ALF-18 Battery Holder
- ♦ ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount

ANSI/PLATO FL1	Low	High	Strobe
OUTPUT LUMENS	100	500	500
RUNTIME	6h	3h	—
DISTANCE	1969ft (600m)	3937ft (1200m)	—
INTENSITY	89600cd	363866cd	—
IMPACT RESISTANCE	1m		
WATERPROOF/DUSTPROOF	IP68, dustproof/waterproof underwater to 2m		
SIZE	Length: 6.2" (158mm) Head: 1.3" (32mm) Body: 1.0" (26mm)		
WEIGHT	5.15 oz. (146g) excluding battery		

TK35UE_{v2.0}

5000 LUMENS



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ CR123A Battery

- ♦ Max 5000 lumen output from two 18650 rechargeable li-ion batteries or four CR123A lithium batteries (*batteries not included)
- ♦ Two operating modes; Tactical operates high and strobe, Duty operates five brightness levels and strobe
- ♦ Rotary mode switch with lock-out function and tactical tail switch



ANSI/PLATO FL1	Tactical Mode		Duty Mode					
	Turbo	Strobe	Eco	Low	Med	High	Turbo	Strobe
OUTPUT LUMENS	3500	3500	30	350	800	2000	5000	3500
RUNTIME	1h 50min	—	85h	13h 40min	4h	2h	1h 40min*	—
DISTANCE	1050ft (320m)	—	105ft (32m)	328ft (100m)	525ft (160m)	820ft (250m)	1312ft (400m)	—
INTENSITY	26000cd	—	250cd	2500cd	6100cd	15200cd	40000cd	—
IMPACT RESISTANCE	1m							
DUSTPROOF/WATERPROOF	IP68, dustproof/submersible underwater to 2m							
SIZE	Length: 5.63" (143mm) Head: 1.69" (43mm)							
WEIGHT	7.13 oz. (202g) excluding batteries							

WF05E

85 LUMENS



OPTIONAL ACCESSORIES

◆ None

- ◆ Max 85 lumen output from two AAA batteries
- ◆ Three brightness levels
- ◆ Intrinsically safe for use in hazardous areas
- ◆ Made of durable high-strength and oxidation-resistant aluminum



ANSI/PLATO FL1	Low	Medium	High
OUTPUT LUMENS	10	30	85
RUNTIME	80h	35h	11h 30min
DISTANCE	59ft (18m)	95ft (29m)	177ft (54m)
INTENSITY	77cd	210cd	724cd
IMPACT RESISTANCE	1m		
WATERPROOF	IP68, waterproof underwater to 2m/dustproof		
SIZE	Length: 5.3" (134.5mm) Body: 0.6" (14.9mm) Head: 0.7" (19mm)		
WEIGHT	1.3 oz. (38g) excluding batteries		

INTRINSICALLY SAFE FLASHLIGHTS

certified by IECEx, ATEX and CSA



WF11E

200 LUMENS



OPTIONAL ACCESSORIES

◆ None

- ◆ Max 200 lumen output from three AA batteries
- ◆ Three brightness levels
- ◆ Intrinsically safe for use in hazardous areas
- ◆ Magnetic tail and body clip



ANSI/PLATO FL1	Low	Medium	High
OUTPUT LUMENS	30	100	200
RUNTIME	70h	29h 30min	10h
DISTANCE	266ft (81m)	463ft (141m)	607ft (185m)
INTENSITY	1652cd	4972cd	8512cd
IMPACT RESISTANCE	1m		
WATERPROOF	IP67, dustproof/waterproof underwater to 1m		
SIZE	Length: 6.6" (167.5mm) Body: 0.9" (24mm) Head: 1.9" (49mm)		
WEIGHT	5.6 oz. (160g) excluding batteries		

WF26R

3000 LUMENS



OPTIONAL ACCESSORIES

- ◆ AOD-M Diffuser Tip
- ◆ AFOL Filter Adapter
- ◆ AOT-L Traffic Wand
- ◆ AER-05 Remote Switch
- ◆ ALB-10 Bike Mount
- ◆ ALC-01 Belt Clip



**INCLUDES
CHARGING
CRADLE**

Battery always
at 100%

- ◆ Max 3000 lumen output from one included 21700 li-ion rechargeable battery
- ◆ Six lighting modes including four brightness levels, strobe, and SOS
- ◆ Cradle charger included; can also be charged with its magnetic USB charging cable separate from the cradle.
- ◆ Dual tail switch design controls on/off and all lighting modes

ANSI/PLATO FL1	Eco	Med	High	Turbo	Strobe	SOS
OUTPUT LUMENS	30	350	1000	3000	3000	100
RUNTIME	44h 8min	8h 56min	2h 47min	2h 41min*	—	—
DISTANCE	154ft (47m)	509ft (155m)	866ft (264m)	1476ft (450m)	—	—
INTENSITY	540cd	5997cd	17483cd	52888cd	—	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 6.14" (156mm) Head: 1.59" (40.4mm) Body: 1.05" (26.6mm)					
WEIGHT	7.83 oz. (222g) including battery					

WF30RE

280 LUMENS

**INTRINSICALLY SAFE
FLASHLIGHT**

certified by IECEx, ATEX and CSA



- ◆ Max 280 lumen output from one included ARB-L21-2600Ex rechargeable li-ion battery
- ◆ Four lighting modes including three brightness levels and strobe
- ◆ Intrinsically safe for use in hazardous areas
- ◆ Specialized battery built specifically to withstand harsh environments

OPTIONAL ACCESSORIES

- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand

ANSI/PLATO FL1	Low	Med	High	Strobe
OUTPUT LUMENS	30	120	280	280
RUNTIME	120h	15h 40min	6h 50min	—
DISTANCE	190ft (58m)	394ft (120m)	558ft (170m)	—
INTENSITY	830cd	3589cd	7200cd	—
IMPACT RESISTANCE	1m			
DUSTPROOF/WATERPROOF	IP68, waterproof underwater to 2m/dustproof			
SIZE	Length: 5.93" (150.5mm) Head: 1.34" (34mm) Body: 1.10" (28mm)			
WEIGHT	7.58 oz. (215g) including battery			

WT16R

300 LUMENS



- ◆ Max 300 lumen output from the built-in 2000 mAh rechargeable li-polymer battery pack
- ◆ Six modes including three spotlight levels, two floodlight levels and a yellow flashing mode
- ◆ Strong magnets on the back and tail for attachment to most metal surfaces
- ◆ USB Type-C rechargeable with battery level indicator



OPTIONAL ACCESSORIES

- ◆ None

ANSI/PLATO FL1	Spotlight Mode			Floodlight Mode		
	Low	Med	High	Low	High	Flash
OUTPUT LUMENS	30	100	300	100	300	10
RUNTIME	30h	9h 20min	3h 50min*	9h 20min	3h 50min*	—
DISTANCE	115ft (35m)	213ft (65m)	377ft (115m)	46ft (14m)	75ft (23m)	—
INTENSITY	320cd	1070cd	3200cd	50cd	130cd	—
IMPACT RESISTANCE	1m					
WATERPROOF	IP66, rain/splash proof / dustproof					
SIZE	Length: 5" (127mm) Width: 1.46" (37mm) Height: 1.02" (26mm)					
WEIGHT	4.55 oz. (129g) including battery					



STRONG MAGNETS
for hands-free lighting

WT25R

1000 LUMENS



**105°
ADJUSTABLE
HEAD**

- ◆ Max 1000 lumen output from one included 18650 Li-ion rechargeable battery
- ◆ Six lighting modes including four brightness levels, strobe, and S.O.S.
- ◆ 105° adjustable head and magnetic tail
- ◆ Magnetic USB rechargeable
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ CR123A Battery

ANSI/PLATO FL1	Low	Med	High	Turbo	Strobe	SOS
OUTPUT LUMENS	50	150	400	1000	1000	50
RUNTIME	29h	11h	4h 50min	3h 40min*	—	—
DISTANCE	164ft (50m)	279ft (85m)	476ft (145m)	722ft (220m)	—	—
INTENSITY	672cd	1877cd	5186cd	11905cd	—	—
IMPACT RESISTANCE	1m					
DUSTPROOF/WATERPROOF	IP66, dustproof/heavy rain resistant					
SIZE	Length: 5.33" (135.3mm) Head: 0.95" (24.1mm) Body: 1.16" (29.4mm)					
WEIGHT	4.83 oz. (137g) including battery					

LANTERNS



CL26R

400 LUMENS



- ♦ Max 400 lumen output from one 18650 Li-ion battery or two CR123As
- ♦ Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- ♦ Extremely durable case can withstand 1.2 tons of pressure
- ♦ IP66 rated rain resistant and dustproof



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ ARB-L18 USB Battery

ANSI/PLATO FL1

MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	IMPACT RESISTANCE	WATER PROOF
Low	40	30h	82ft (25m)	1m	IP66, rain resistant/dustproof
Medium	150	15h			
High	400	5h			
Front	25	58h			
Down 1	3	240h			
Down 2	25	58h			
Red	1	200h			
SIZE	Diameter: 1.9" (49mm) Height: 3.8" (97mm)				
WEIGHT	4.1 oz. (116g) excluding batteries				

CL30R

650 LUMENS



- ♦ Max 650 lumen output from up to three 18650 rechargeable Li-ion batteries
- ♦ Six modes including 5 brightness levels and flashing mode
- ♦ USB rechargeable with low battery indicator
- ♦ Serves as a portable power bank to charge other devices



OPTIONAL ACCESSORIES

- ♦ ARB-L18 Battery
- ♦ CR123A Battery

ANSI/PLATO FL1	Eco	Low	Med	High	Turbo
OUTPUT LUMENS	10	50	100	350	650
RUNTIME	2600mAh	300h	70h	38h	9h
	3500mAh	400h	93h	51h	12h
MAX DISTANCE	115ft (35m)				
IMPACT RESISTANCE	1m				
WATERPROOF	IPX-7, waterproof underwater to 1m				
SIZE	Height: 5.4" (136mm) Diameter: 3.7" (93mm)				
WEIGHT	14.5 oz. (412g) excluding battery				

BIKE LIGHTS

BC05R_{v2.0}

15 LUMENS



- ◆ Max 15 lumen output from built-in 400mAh Li-polymer battery
- ◆ Six modes including two brightness levels and four flashing modes
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Also use as a headlamp or backpack light
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA

OPTIONAL ACCESSORIES
◆ None



ANSI/PLATO FL1	High Flash (Fast)	High Flash (Slow)	High	Low Flash (Fast)	Low Flash (Slow)	Low
OUTPUT LUMENS	15	15	15	5	5	5
RUNTIME	35h	25h	4.5h	120h	80h	16h
DISTANCE	164ft (50m)					
INTENSITY	9cd	9cd	9cd	3cd	3cd	3cd
IMPACT RESISTANCE	1.5m					
WATERPROOF/DUSTPROOF	IP66, rain/splash proof / dustproof					
SIZE	Length: 2.01" (51mm) Width: 0.87" (22mm) Height: 0.87" (22mm)					
WEIGHT	0.99 oz. (28g) including battery					

BC21R_{v3.0}

1200 LUMENS



- ◆ Max 1200 lumen output from one included 18650 Li-ion battery or compatible with two CR123A lithium batteries
- ◆ Five modes including four brightness levels and flashing mode
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Quick-release bike mount

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ALD-08 Helmet Clip
- ◆ ALD-10 GoPro Mount



ANSI/PLATO FL1	Low	Medium	High	Turbo	Flash
OUTPUT LUMENS	50	150	400	1200	400
RUNTIME	33h	11h	6h 30min	2h 12min*	—
DISTANCE	92ft (28m)	161ft (49m)	262ft (80m)	466ft (142m)	—
INTENSITY	206cd	602cd	1621cd	5082cd	—
IMPACT RESISTANCE	1.5m				
WATERPROOF	IP68, dustproof/submersible underwater to 2m				
SIZE	Length: 4.25" (116mm) Width: 1.06" (31mm) Height: 1.14" (30mm)				
WEIGHT	5.54 oz. (157g) including battery				

BC25R

600 LUMENS



- ◆ Max 600 lumen output from the built-in 2600mAh Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Cut-off facula line for safer commuting in traffic

OPTIONAL ACCESSORIES

- ◆ ALD-08 Helmet Clip
- ◆ ALD-10 GoPro Mount



ANSI/PLATO FL1	Low	Medium	High	Turbo
OUTPUT LUMENS	50	150	350	600
RUNTIME	36h	15h	7h	2h*
DISTANCE	105ft (32m)	174ft (53m)	259ft (79m)	348ft (106m)
IMPACT RESISTANCE	1m			
WATERPROOF	IP66 - rain resistant/dust proof			
SIZE	Length: 4.4" (113mm) Width: 1.25" (32mm) Height: 1.2" (31mm)			
WEIGHT	5.5 oz. (155 grams) including mount and battery			

BEST SELLER

BC26R

1600 LUMENS



- ◆ Max 1600 lumen output from the included rechargeable 21700 li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ 100° beam for a wider field of view
- ◆ USB Type-C rechargeable with battery level indicator

OPTIONAL ACCESSORIES

- ◆ ARB-L21 Battery
- ◆ ALD-08 Helmet Clip
- ◆ ALD-10 GoPro Mount



ANSI/PLATO FL1	Low	Medium	High	Turbo	Flash
OUTPUT LUMENS	50	200	600	1600	600
RUNTIME	65h	18h	9.5h	3.5h*	-
DISTANCE	92ft (28m)	187ft (57m)	331ft (101m)	554ft (169m)	-
INTENSITY	206cd	834cd	2560cd	7158cd	-
IMPACT RESISTANCE	1.5m				
WATERPROOF	IP68, dustproof/submersible underwater to 2m				
SIZE	Length: 4.45" (113mm) Width: 1.14" (29mm) Height: 1.06" (27mm)				
WEIGHT	5.47 oz. (155g) including mount and battery				

BC30 v2.0

2200 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ CR123A Battery
- ◆ ALD-08 Helmet Clip
- ◆ ALD-10 GoPro Mount



- ◆ Max 2200 lumen output from two removable 18650 Li-ion batteries or four CR123As (batteries not included)
- ◆ Six lighting modes including five brightness levels and flashing mode
- ◆ Smart wireless control switch
- ◆ Dual Distance Beam System

ANSI/PLATO FL1	Eco	Low	Medium	High	Burst	Flash
OUTPUT LUMENS	50	200	600	1500	2200	600/50
RUNTIME	50h	16h	6h	2h 18min	30sec	—
DISTANCE	92ft (28m)	184ft (56m)	315ft (96m)	509ft (155m)	614ft (187m)	—
INTENSITY	196cd	780cd	2320cd	5913cd	8792cd	—
IMPACT RESISTANCE	1m					
WATERPROOF	IP67, dustproof/waterproof underwater to 1m					
SIZE	Length: 4.7" (120mm) Width: 2.0" (50.5mm) Height: 1.3" (31.8mm)					
WEIGHT	5.4 oz. (154g) excluding battery and mount					

BC30R

1800 LUMENS



OPTIONAL ACCESSORIES

- ◆ ALD-08 Helmet Clip
- ◆ ALD-10 GoPro Mount



- ◆ Max 1800 lumen output from the built-in 5200mAh micro-USB rechargeable battery
- ◆ Dual Distance Beam System with OLED digital display
- ◆ Quick-Release bicycle mount
- ◆ Upgraded remote pressure switch for fast mode selection

ANSI/PLATO FL1					
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	IMPACT RESISTANCE	WATER PROOF
Eco	50	36h	92ft (28m)	1m	IP66 - rain resistant, dustproof
Low	150	16h 10min	154ft (47m)		
Medium	400	7h 20min	249ft (76m)		
High	1000	2h 40min	400ft (122m)		
Burst	1800	—	528ft (161m)		
SIZE	Length: 4.5" (114mm) Width: 2.0" (50.5mm) Height: 1.3" (31.8mm)				
WEIGHT	7.8 oz. (221.6g) excluding handlebar mount				

BATTERIES & CHARGERS

SINGLE BAY CHARGERS



ARE-X1 V2.0/ARE-D1

2-BAY CHARGERS



ARE-A2/ARE-D2

4-BAY CHARGERS



ARE-A4

Specifically designed for 18650 rechargeable batteries, these chargers feature a constant-current charge which safely extends the health and lifespan of the battery. Built for all types of batteries from 10440 up to 26650, AAA to AA. Automatically chooses the correct charging mode for each type of battery.

RECHARGEABLE BATTERIES

Fenix rechargeable batteries are designed for today's high-intensity flashlights. Featuring a large capacity, triple over-heat protection, built-in over-charge protection and other safety features, these batteries from Fenix are your best choice for powering your Fenix light.



MODEL	TYPE	CAPACITY	VOLTAGE
ARB-L14-1600U	14500 with USB Port	1600 mAh	1.5v
ARB-L16-700UP	16340 with USB Port	700 mAh	3.6v
ARB-L18-2600	18650	2600 mAh	3.6v
ARB-L18-2600U	18650 with USB Port	2600 mAh	3.6v
ARB-L18-3000P	18650	3000 mAh	3.6v
ARB-L18-3400	18650	3400 mAh	3.6v
ARB-L18-3500	18650	3500 mAh	3.6v
ARB-L18-3500U	18650 with USB Port	3500 mAh	3.6v
ARB-L21-4000P	21700	4000 mAh	3.6v
ARB-L21-5000	21700	5000 mAh	3.6v
ARB-L21-5000U	21700 with USB Port	5000 mAh	3.6v

ACCESSORIES

BATTERY HOLDER



ALF-18

Allows you to use an 18650 battery in flashlights that are built to use a 21700 battery. Simply insert your 18650 battery into the holder and place both into your 21700 capable flashlight.

BIKE MOUNT



ALB-10

Take Fenix flashlights on the road and trail with this fully-adjustable mount. Capable of holding small to mid-sized lights, this mount can be moved from bike to bike without using tools.

DIFFUSER TIPS



AOD

Transform your Fenix light into a reading, signal or emergency light. Attachment is quick and secure with materials designed for field use.


FILTER ADAPTERS



AOF

Improve night-time visibility and avoid detection with these colored filters. Durable with an anti-roll design, they improve map reading, navigation and tracking.

GEAR BAG

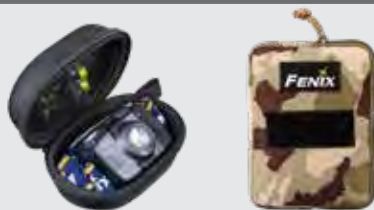

APB-20/APB-30

Ultra-compact headlamp gear bags made of high-strength nylon cloth. Perfect for headlamps, small flashlights and extra batteries

HEADBAND



AFH-02/AFH-03

Replacement headband for your headlamp. Its perforated material reduces weight and creates a more comfortable wear.

HELMET MOUNTS/CLIPS



ALD-02/ALG-03

Quickly attach and detach headlamps or flashlights to any outdoor or work helmet—making sure the light stays securely fixed to your helmet.

HOLSTERS



ALP-10

Made from hot-pressed nylon, the service life of this holster is 10 times longer than other materials—extremely strong and scratch resistant.

LANYARDS



ALL-01

Soft and comfortable, this flashlight lanyard is fully adjustable, can hold up to 46 pounds and is a great addition for your large Fenix flashlight.

RAIL/BARREL MOUNTS



ALG-00/ALG-15/ALG-16/ALG-18

Mount your flashlight to a weapon rail or barrel with these anodized aluminum mounts. Ensure positive engagement with a matte black finish for a professional appearance.

REMOTE SWITCHES



AER SERIES

Operate your flashlight remotely thanks to this remote switching system. Perfect for use in tactical situations when mounted in conjunction with a rail mount.

PRESSURE SWITCH MOUNT



ALG-05/ALG-06

These mounts are designed to hold the Fenix AER series tactical remote pressure switches control pad to your weapon. Made of aluminum alloy with hard-anodized finish.

TRAFFIC WAND



AOT

Point the way to safety with this click-and-go accessory from Fenix. Long-distance visibility improves as does close-in traffic management.

UNIVERSAL MOUNT



BIOBKMT

Perfect tool for any flashlight owner who needs to attach their flashlight to a tent, camper, bicycle, tree—just about anywhere where hands-free light is needed.

WRIST MOUNT



ALW

This mount is a unique way to allow your flashlight to be used hands free. Simply attach the flashlight to the mount and wrap the strap to your wrist.

ACCESSORY COMPATIBILITY CHART

MODEL	DIFFUSER TIP	FILTER ADAPTER	TRAFFIC WAND		RAIL MOUNT				REMOTE SWITCH				HOLSTER		BIKE MOUNT	HELMET HOLDER	WRIST MOUNT
	A0D-S V2.0	A0FS+	A0T-S+	A0T-M	ALG-00	ALG-15	ALG-16	ALG-18	AER-02 V2.0	AER-04	AER-05	AER-06s	ALP-10S	ALP-10L	ALB-10	ALD-05	ALW-01
E SERIES																	
E-CP																	
E-LITE																	
E-SPARK																	
E-STAR																	
E01 V2.0																	
E02R																	
E03R																	
E05R																	
E09R																	
E12 V2.0															✓		✓
E18R V2.0	✓														✓		✓
E20 V2.0	✓		✓												✓		
E28R	✓												✓		✓	✓	
E35 V3.0	✓												✓		✓	✓	
GL SERIES																	
GL19R												✓					
GL22																	
HT SERIES																	
HT18					✓	✓	✓	✓		✓	✓				✓	✓	
HT30R					✓	✓	✓	✓		✓	✓				✓	✓	
LD SERIES																	
LD15R																	
LD22 V2.0	✓		✓												✓		
LD30	✓	✓	✓										✓		✓	✓	
LR SERIES																	
LR35R																	
LR40R																	
LR50R																	
LR80R																	
PD SERIES																	
PD25R	✓														✓		✓
PD32 V2.0	✓	✓	✓		✓	✓	✓	✓	✓				✓		✓	✓	
PD35 V3.0	✓	✓	✓		✓	✓	✓	✓	✓				✓		✓	✓	
PD36R	✓	✓	✓		✓	✓	✓	✓	✓				✓		✓	✓	
PD36R PRO	✓				✓	✓	✓	✓			✓			✓	✓	✓	
PD36R TAC	✓				✓	✓	✓	✓			✓			✓	✓	✓	
PD40R V2.0					✓	✓	✓	✓						✓	✓	✓	
TK SERIES																	
TK16 V2.0				✓	✓	✓	✓	✓			✓			✓	✓	✓	
TK20R V2.0				✓	✓	✓	✓	✓			✓			✓	✓	✓	
TK22 TAC					✓	✓	✓	✓			✓				✓	✓	
TK26R					✓	✓	✓	✓							✓	✓	
TK30					✓	✓	✓	✓		✓					✓	✓	
TK35UE V2.0																	
WF SERIES																	
WF05E																	
WF11E																	
WF26R											✓				✓	✓	
WF30RE																	
WT SERIES																	
WT16R																	
WT25R																	

BATTERY COMPATIBILITY CHART

	RECHARGEABLE LI-ION BATTERY			LITHIUM BATTERY	BATTERY HOLDER
MODEL	ARB-L16 16340	ARB-L18 18650	ARB-L21 21700	CR123A	ALF-18
E SERIES					
E-CP					
E-LITE					
E-SPARK					
E-STAR					
E01 V2.0					
E02R					
E03R					
E05R					
E09R					
E12 V2.0					
E18R V2.0	✓			✓	
E20 V2.0					
E28R		✓		✓	
E35 V3.0		✓*	✓		✓
GL SERIES					
GL19R					
GL22	✓				
HT SERIES					
HT18		✓*	✓		✓
HT30R		✓*	✓		✓
LD SERIES					
LD15R	✓			✓	
LD22 V2.0					
LD30		✓		✓	
LR SERIES					
LR35R			✓		
LR40R		✓			
LR50R			✓		
LR80R					
PD SERIES					
PD25R	✓			✓	
PD32 V2.0		✓		✓	
PD35 V3.0		✓		✓	
PD36R		✓*	✓		✓
PD36R PRO			✓		
PD36R TAC		✓*	✓		✓
PD40R V2.0		✓*	✓		✓
TK SERIES					
TK16 V2.0		✓*	✓		✓
TK20R V2.0			✓		
TK22 TAC			✓		
TK26R		✓		✓	
TK30		✓*	✓		✓
TK35UE V2.0		✓		✓	
WF SERIES					
WF05E					
WF11E					
WF26R			✓		
WF30RE					
WT SERIES					
WT16R					
WT25R		✓		✓	


	RECHARGEABLE LI-ION BATTERY				LITHIUM BATTERY	BATTERY HOLDER	HELMET MOUNT	HELMET CLIP	GOPRO MOUNT
MODEL	ARB-L14 14500+USB	ARB-L16 16340	ARB-L18 18650	ARB-L21 21700	CR123A	ALF-18	ALG-03 V2.0	ALD-08	ALD-10
HEADLAMPS									
HL18R-T									
HM23	✓								
HM50R V2.0		✓			✓				
HM60R			✓		✓		✓		
HM61R			✓		✓		✓		
HM65R			✓		✓		✓		
HM65R-T			✓		✓				
HM70R			✓*	✓		✓	✓		
HP16R									
HP25R V2.0				✓					
HP30R V2.0				✓			✓		
WH23R									
LANTERNS									
CL20R									
CL26R			✓		✓				
CL28R									
CL30R			✓		✓				
BIKE LIGHTS									
BC05R									
BC21R V3.0			✓					✓	✓
BC25R								✓	✓
BC26R			✓*	✓		✓		✓	✓
BC30 V2.0			✓		✓			✓	✓
BC30R								✓	✓

*when used with the ALF-18 Battery Holder



THE FENIX CONSTRUCTION

Fenix prides itself in keeping up with the latest lighting technologies and build techniques. Fenix lights will always be the most innovative, brightest and toughest lights on the market.

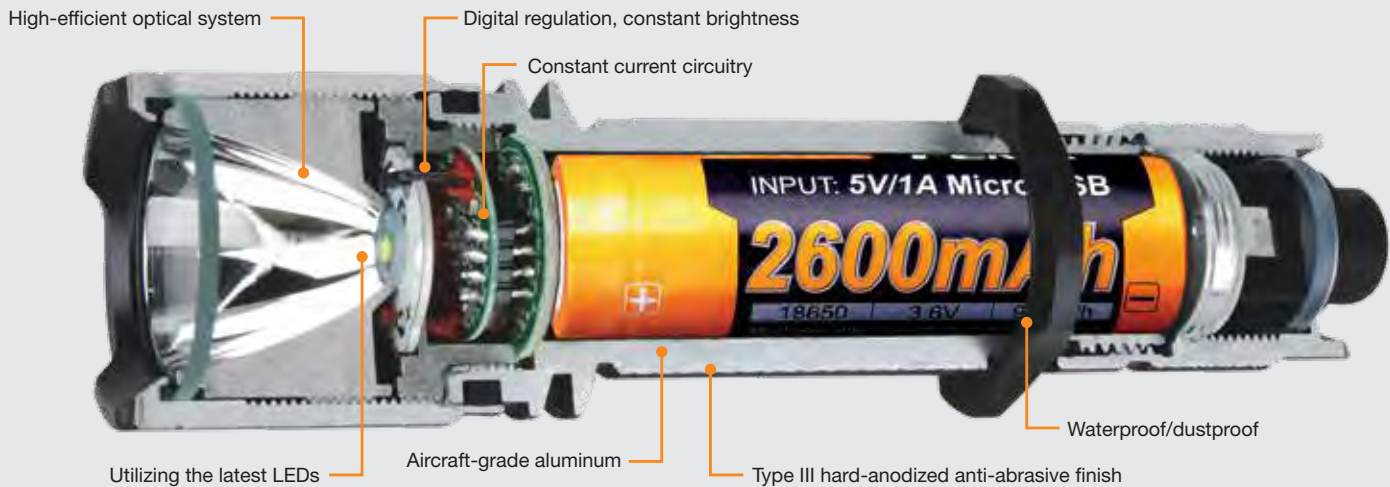

THE FENIX PROTOCOL™ GOES BEYOND

By adding up to eight extra testing steps, the FENIX PROTOCOL puts devices in situations that more closely mirror the flashlight users' reality through a) shakeout, b) bending, c) salty spray, d) ultraviolet radiation, e) environmental, f) vibration, g) switch and h) temperature testing.



SHAKEOUT TEST

evaluates the scratch and wear resistance of the flashlight's surface



BENDING TEST

challenges the bending degree and inherent strength of internal wiring systems



SALTY SPRAY TEST

puts the light into corrosion-provoking conditions beyond what most will ever face



ULTRAVIOLET RADIATION TEST

monitors the light's performance after intense exposure to UV radiation




ENVIRONMENTAL TEST

pushes low and high temperature ranges to verify performance at extremes



VIBRATION TEST

jars the light over thousands of cycles to validate resistance to rigorous forces



SWITCH TEST

checks switch function well over the projected lifespan of the light









TEMPERATURE TEST

determines heat generation and dissipation of Fenix' powerful LED systems

HIGHER STANDARDS = BETTER FLASHLIGHT PERFORMANCE

ANSI package symbols make it easier to buy with confidence. Six baseline tests allow flashlight users to compare essential performance attributes. While not a comprehensive evaluation of individual lights, ANSI FL-1 Standards are the start of intelligent buying.

	LIGHT OUTPUT measures total quantity of light energy = how BRIGHT it appears. Three samples are tested with fresh batteries for output measured in lumen		PEAK BEAM INTENSITY measures the brightest point = how STRONG the light is. Lux levels at 2, 10 or 30 meters are taken within the first 2 min of operation
	RUNTIME measures hours to 10% brightness = how LONG batteries last. Fresh batteries are run at the light's maximum brightness level and other levels		IMPACT RESISTANCE checks function when dropped = how HIGH a drop it can take. Six drops are made at different angles starting at one meter
	BEAM DISTANCE measures where the light diminishes = how FAR the light shines. Rated distance – in meters – is where a luxmeter detects 0.25 lux		WATER RESISTANCE checks the light's dependability = how RESISTANT it is to water. Splashing, temporary or total immersion are tested immediately after 30 minutes of exposure

CUSTOMER SERVICE/ORDERS

HOURS OF OPERATION

9:00 am to 5:00 pm CST

Toll Free: 888-775-9996

Fax: 888-775-9991

Email: orders@fenixlighting.com

FENIX LIGHTING US HEADQUARTERS

BILLING ADDRESS

10488 W. Centennial Rd. #301

Littleton CO 80127

SERVICE REPAIR CENTER & WAREHOUSE LOCATION

161 Market Street

Monticello, AR 71655

MERCHANDISE RETURNS

Merchandise may not be returned without the prior approval of Fenix Lighting US. Please contact customer service with any inquiries you have on product that was shipped in error or is found to be defective in workmanship and quality. If a customer returns product to same retailer of purchase, then the retailer has the ability to satisfy their consumer directly or refer to our customer service department. In the event the retailer exchanges product to satisfy the consumer, then the retailer may return the faulty product exchanged by consumer for credit or equal replacement product by contacting customer service.

REPAIR POLICY

If your Fenix product has a manufacturer's defect covered by our warranty, we will either repair or replace it, at our option, without charge. Return it to your place of purchase or send it to the Service Repair Center address. Please include your 1) name, 2) address, 3) phone number and 4) email address (optional) with the product.

Most damaged Fenix products not covered by the warranty can still be repaired. If repair costs and handling charges apply, you will be notified prior to any service. Please send to the Service Repair Center address. Include your 1) name, 2) address, 3) phone number and 4) e-mail address (optional) with the product. Do not send to the Headquarters address.

All warranty repairs or replacements are at the sole discretion of the Fenix Lighting US Authorized Repair Center and we reserve the right to refuse a request for any reason.

LIFETIME LIMITED WARRANTY

Fenix Lighting US, guarantees all Fenix products purchased from retailers directly supported by them to be made of first-class materials and therefore provides a lifetime warranty against any defects in material and workmanship.

Excluded from warranty coverage is any damage to the exterior deemed reasonable wear and tear such as scratches and/or fading of color. In addition, the warranty does not apply to damage caused by abnormal or unreasonable use of any of the components. This includes use of unapproved batteries in Fenix products (see user manuals). This warranty is in place of all other warranties, including warranty of fitness for a particular purpose and warranty of merchantability and excludes any liability for incidental or consequential damages.

LIMITATION OF LIABILITY

The liability of Fenix Lighting US in regards to the sale and delivery of goods according to the invoice is limited to repair and replacement of, or credit for, defective goods, at the option of Fenix Lighting US. Under no circumstances shall Fenix Lighting US be liable for economic loss or for any other special, indirect, incidental or consequential damages, of any kind suffered by purchaser.

FENIX LIGHTING US PROMISE

We promise to support you (the retailer) and your consumers to deliver the highest level of satisfaction. That means taking responsibility for promptly solving product, service or warranty problems. If, as a retail partner, you are not satisfied with the service you have received at any time, then please contact us directly at customerservice@fenixlighting.com. The goal remains your satisfaction – and success – as a key member of the Fenix Lighting US retail network.

* The runtime of this mode is the accumulated time without time-limited downshifting and overheat protection.



fenixlighting.com

CUSTOMER SERVICE
(888) 775-9996 (9:00 am-5:00 pm CST)
orders@fenixlighting.com

FENIX LIGHTING US HEADQUARTERS
10488 W. Centennial Rd. #301
Littleton, CO 80127

© FENIX LIGHTING US
Specifications subject to change
without notice.