

PELI™ FLASHLIGHTS

CATALOGUE

JUNE 2023



SINCE 1976



LIFETIME GUARANTEE*

Register for
our newsletter!



+ TABLE OF CONTENTS

PERFORMANCE PELI FLASHLIGHTS	3
SAFETY	4-5
PELI FLASHLIGHTS	
Small Lights	6
Medium Torches	7-8
Large Lights	9
Atex Torches	10-13
Tactical Lights	14-15
Headlamps	16-17
PELI LIGHT MOUNTING & HOLSTER	18
LIGHTING FEATURES	18
SPECIFICATIONS	19-21
FULL LINE OVERVIEW	22-23

PELI™ FLASHLIGHTS

When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner.

Engineered in the U.S
and Guaranteed for Life.



Photo by Uros Podlogar


PERFORMANCE PELI FLASHLIGHTS

+ STANDARDS AND RATINGS (Applicable to torches only)




LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



WATER PROOF/SUBMERSIBLE

Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.
Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light's features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

+ GLOSSARY OF TERMS

CANDELA A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

LUX The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

LUMEN A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

INTEGRATING SPHERE An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (INGRESS PROTECTION) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

RECHARGEABLE Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.





SAFETY IN EUROPE

IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exact requirements of the European ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

CE  II 1G EX IA OP IS IIC T4 GA


ATEX code corresponding to the 1975Z0 torch

Need more information about ATEX?
Please visit www.peli.com/atex



+ COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS

Download our poster
on ATEX Directive 2014/34/EU.




HAZARDOUS AREA ELECTRICAL GUIDELINES				
SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATIONS	EUROPEAN CLASSIFICATION	VOLATILITY*
CLASS I Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	– Oil Refinery – – Paint Warehouse – – Offshore Oil Rig – – Spray Booth –	Division 1 (Hazard Likely)	Category 1 / Zone 0 (Hazard Certain)	MOST ↑ ↓ LEAST
		Division 2 (Hazard Not Likely)	Category 2 / Zone 1 (Hazard Likely)	
CLASS II Combustible Dusts (Metals [Div.1 only], Coal, Grain)	– Coal Mine – – Grain Silo – – Munitions Factory – – Hay Storage Facility –	Division 1 (Hazard Likely)	Category 1 / Zone 20 (Hazard Certain)	
		Division 2 (Hazard Not Likely)	Category 2 / Zone 21 (Hazard Likely)	
CLASS III Ignitable Fibers & Flyings (Machined Magnesium)	– Paper Mill – – Woodworking Facility – – Textile Mill – – Cotton Gin –	Division 1 (Hazard Likely)	N/A	
		Division 2 (Hazard Not Likely)	N/A	

* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

US CLASSIFICATIONS		EUROPEAN CLASSIFICATIONS	
Division 1: Where volatile substances can exist all of the time or some of the time under normal operating conditions.	Division 2: Where volatile substances are not likely to exist under normal operating conditions.	Category 1 / Zone 0: Flammable material present for long periods (more than 1.000 hours* a year).	Category 3 / Zone 2: Flammable material present for short periods (less than 10 hours* a year).
		Category 2 / Zone 1: Flammable material present in normal operation (10- 1.000 hours* a year).	

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

+ DIAGRAM OF CLASS / DIVISIONS / ZONES

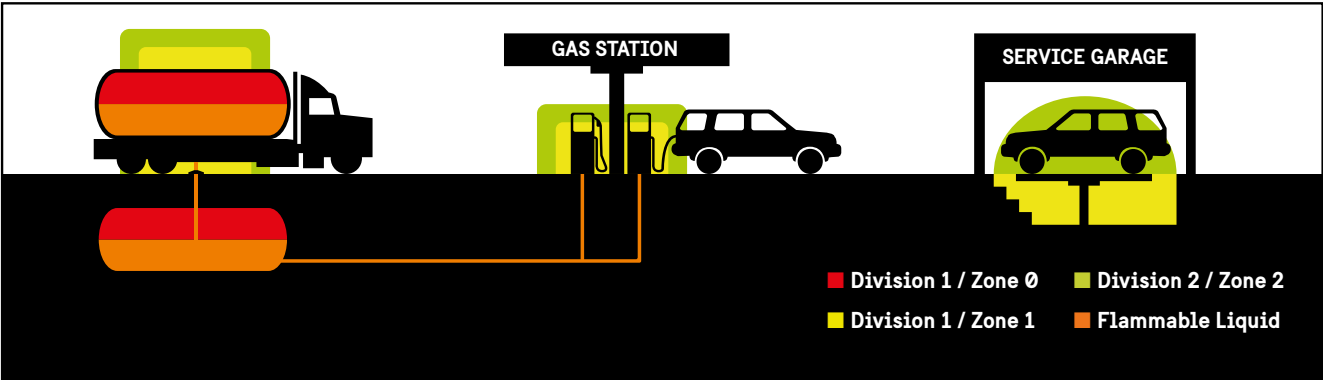

SMALL LIGHTS

When compact is a must or just a convenience, choose one of Peli's small, smart, powerful lights.

PELI SMALL LIGHTS

1910

LIGHT SOURCE//
LED
BATTERIES//
1 AAA Alkaline (included)
LENGTH//
9.7 cm (3.8")
MODES//
High / Low



LUMENS
106
RUN TIME
4h

1920

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.0 cm (5.5")
MODES//
High / Low



LUMENS
224
RUN TIME
8h 45m

1930 L1™

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
6.7 cm (2.64")
CERTIFICATIONS//
CI, D1/CII, D2 IECEx ia



SAFETY CERTIFIED
LUMENS
12
RUN TIME
4h 15m

MEDIUM TORCHES

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your torch in an emergency.

PELI MEDIUM TORCHES

2010 SABRELITE™

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS
161
RUN TIME
22h



2410 STEALTHLITE™ LED

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II III, D1 IECEx ia



LUMENS
126
RUN TIME
7h 30m

2460 STEALTHLITE™


LIGHT SOURCE//
LED
BATTERIES//
4 NiMH (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED
LUMENS
183
RUN TIME
5h

LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Peli is also a leader of high performance lithium-ion technology in portable lighting.



9050 LANTERN
THE VERSATILE LANTERN WITH A DUAL LITHIUM-ION/ALKALINE BATTERY SYSTEM

Holds up to 4 lithium-ion rechargeable batteries or up to 16 AA alkaline or NiMH batteries.

9050 LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
2 18650 Lithium-ion (included)

LENGTH//
20,4 cm (8.03")

MODES//
High / Low / Flashing
Flexible battery system

LUMENS
3369
RUN TIME
Up to 5h 30m



9410L LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
6 Lithium-ion 18650 (included)

LENGTH//
22,2 cm (8.75")

MODES//
High / Low / Flashing
Full Time Battery Indicator

LUMENS
2207
RUN TIME
Up to 11h



3310PL PHOTOLUMINESCENT

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15,6 cm (6.14")

MODES//
High / Low / Flashing
(torch body glows in the dark)

(Photoluminescent)

LUMENS
378
RUN TIME
Up to 202h



3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15,6 cm (6.14")

INCLUDES//
3310PL and Wall Mountable Case
(torch body glows in the dark)

(Photoluminescent)

LUMENS
378
RUN TIME
Up to 202h



5000

LIGHT SOURCE//
LED

BATTERIES//
2 AAA Alkaline

LENGTH//
14,2 cm (5.59")

MODES//
High / Low / Flashing

LUMENS
202
RUN TIME
7h



5010

LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline

LENGTH//
15,9 cm (6.26")

MODES//
High / Low / Flashing

LUMENS
392
RUN TIME
26h



5020

LIGHT SOURCE//
LED

BATTERIES//
4 AAA Alkaline

LENGTH//
14,9 cm (5.87")

MODES//
High / Medium / Low / Flashing

LUMENS
586
RUN TIME
27h



5050R

LIGHT SOURCE//
LED

BATTERIES//
1 18650 Lithium

LENGTH//
15,6 cm (6.16")

MODES//
Boost / High / Low / Flashing

LUMENS
393
RUN TIME
40h

USB



5-SERIES TORCHES. IPX8 RATED.

Peli 5 Series lights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.



ATEX TORCHES


Zone 0 & 1 (Cat. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the European ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.



1930Z0 L1™

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
6.7 cm (2.64")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T6/T4 Ga




1975Z0 MITYLITE™

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.6 cm (5.75")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



2010Z0 SABRELITE™

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
20.6 cm (8.11")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4/T3 Ga




Photoluminescent
2013PL Shroud



FLASHLIGHT 2315Z0

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (included)
LENGTH//
15.8 cm (6.22")
CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb




1975Z1 MITYLITE™

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
14.6 cm (5.75")
CERTIFICATIONS//
II 2 G Ex ib op is IIB T4 Gb




2220Z1 VB3™

LIGHT SOURCE//
LED
BATTERIES//
2 CR2032 Lithium (included)
LENGTH//
8.9 cm (3.50")
CERTIFICATIONS//
II 2 G Ex ib op is IIC T6 Gb



2410Z0 STEALTHLITE™

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
17.8 cm (7")
CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



Download our poster
on ATEX Directive 2014/34/EU.



* For more information on ATEX, see page 4-5

2460Z1 STEALTHLITE™

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
17.8 cm (7")

CERTIFICATIONS//
II 2 G Ex ia IIC T3 Gb



2610Z0 HEADSUP LITE™

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
3.8 cm (1.49")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga



2745Z0 HEADSUP LITE™

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low / Flashing



2765Z0 HEADSUP LITE™

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low / Downcast / Flashing



2690Z0 HEADSUP LITE™

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
7.1 cm (2.81")

CERTIFICATIONS//
I M1 Ex ia l Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65°C Da



2755Z0 HEADSUP LITE™

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Low / Flashing



3315Z0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline (included)

LENGTH//
15.6 cm (6.14")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



3335RZ0

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)

LENGTH//
15.5 cm (6.11")

CERTIFICATIONS//
III 1 G Ex ia IIC T4 Ga



COMING
SOON

3610Z0 LITTLE ED™

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
19.1 cm (7.51")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



3765Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA NiMH (included)

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T3 Ga

MODES//
High / Low / Flashing



3415MZ0

LIGHT SOURCE//
LED

BATTERIES//
3 AA Alkaline

LENGTH//
18.9 cm (7.44")

CERTIFICATIONS//
II 1 G Ex ia op is IIC T4 Ga

MODES//
High / Flashing



Includes
magnetic clip

3715Z0

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline

LENGTH//
13.6 cm (5.36")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da

MODES//
High / Low / Downcast / Flashing



Photoluminescent
3713PL Shroud

9415Z0 LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
4 C NiMH (included)

LENGTH//
22.2 cm (8.75")

CERTIFICATIONS//
II 1 G Ex ia IIC T4 Ga

MODES//
High / Low / Flashing



THE PELI 3715Z0 IS AN ABSOLUTE FAVOURITE

**SURVIVAL
+ STORIES**

Compact and it really packs a lot of light. The three types of light are really convenient for different purposes. For instance, the large light to explore incidents and the three small LED lights to read maps or walk in dark areas. I also use this light to train in our hazmat suits. The thick rubber gloves are not an issue when working with the light. The button on top is really good to operate and the grip on the side helped me during the training. This light is really impressive. Compared to our current lights, it really stands out!

Dutch firefighter - Fire Dpt. Brabant-Noord, Boxmeer

Photo by Guido Siebers

* For more information on ATEX, see page 4-5. ** Only available upon min. order quantity

* For more information on ATEX, see page 4-5

TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.



PELI TACTICAL LIGHTS


7000

LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion (Included)

LENGTH//
13.5 cm (5.31")

MODES//
High / Medium / Low / Strobe



7060

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)

LENGTH//
22 cm (8.65")

MODES//
High / Strobe / Medium / Low / Self Programmable




7600

LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)*

LENGTH//
15.7 cm (6.19")

MODES//
High / Strobe / Medium / Low / Full Time Battery Level Indication



*Multi-battery.
Supports also 2 CR123




8060

LIGHT SOURCE//
LED

BATTERIES//
4 NiMH C (included)

LENGTH//
32.2 cm (12.67")

MODES//
High / Strobe / Medium / Low /
Flashing / Self Programmable



PELI TACTICAL LIGHTS



HEADLAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

PELI HEADLAMPS



Photo by HRC

2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
6.3 cm (2.48")

MODES//
Variable Light Output /
Dual Red LED Night Vision



LUMENS
200
UP TO
RUN TIME
103h



**GESTURE
ACTIVATION
CONTROL**

2740 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low /
Flashing / Red LED



LUMENS
66
UP TO
RUN TIME
21h

2750 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Low / Flashing /
Red LED / Low Battery Warning



LUMENS
259
UP TO
RUN TIME
11h

■ (Photoluminescent)

2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
5.7 cm (2.25")

MODES//
High / Medium / Low / Downcast /
Flashing / Red LED / Full-time Battery
Level Indicator



LUMENS
289
UP TO
RUN TIME
11h

2780R HEADLAMP



LIGHT SOURCE//
LED

BATTERIES//
1 Lithium-Ion 18650 (included)

LENGTH//
7.6 cm (3.00")

MODES//
High / Medium / Low /
Downcast / Spot / Flashing
Full-time Battery Level Indicator



LUMENS
558
UP TO
RUN TIME
7h 30m

■ □ ■ (Photoluminescent)
3 Interchangeable Covers Included



Photo by Alan Rouran

LIGHT MOUNTING
SYSTEMS AND
HOLSTERS



HOLSTER STYLES		CAT. NO. 7070RWH	CAT. NO. 7116	CAT. NO. 7106	CAT. NO. 7606	CAT. NO. 7607	CAT. NO. 7616 CAT. NO. 7617	CAT. NO. 7627
	CAT. NO.							
	7060							
	7070R	•						
	7100			•				
	7110		•					
	7600				•	•		
	7610						•	
	7620							•

LIGHT AND HEADLAMP HOLDER STYLES		CAT. NO. 0770C, UNIV.	CAT. NO. 0780 FULL HOUSE	CAT. NO. 0782 ALL IN	CAT. NO. 0783 DOUBLE DOWN	CAT. NO. 2748Z0	CAT. NO. 1975HZ0
	CAT. NO.						
	1975Z0						•
	2390	•					
	2410	•	•				
	2460	•	•				
	2745Z0					•	
	2755Z0					•	
	2765Z0					•	
	3310	•		•			
	3315	•	•	•			
	All Headlamps				•		

PELI LIGHTING TOOLS:
MORE THAN A FLASHLIGHT.

Here are just a few features that make our lighting tools shine:



SELF
PROGRAMMABLE
(On selected models only)



GESTURE
ACTIVATION
(On selected models only)



USB
RECHARGEABLE
(On selected models only)



PHOTOLUMINESCENT
DESIGNS
(On selected models only)



PIVOTING
60° HEAD
(On selected models only)



DOWNCAST
LIGHTING FEATURES
(On selected models only)



LEGENDARY
LIFETIME* GUARANTEE

*Lifetime guarantee not applicable where prohibited by law.

	CAT. NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT (lumens)	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLOURS
SMALL LIGHTS	1910	1 AAA Alkaline ^A	0.043	9.7	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1920	2 AAA Alkaline ^A	0.062	14	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1930	4 LR 44 Alkaline ^A	0.026	6.7	12	4h 15m	17	70	IPX4	CI, D1/CII, D2 IECEx ia	■ ■
MEDIUM TORCHES	2010	3 C Alkaline	0.38	20.6	161	22h	160	6398	IPX7	CI II III, D1 IECEx ia	■
	2410	4 AA Alkaline ^A	0.207	17.8	126	7h 30m	161	6500	IPX7	CI II III, D1 IECEx ia	■
	2460	4 Ni-MH ^A	0.221	17.8	183	5h	179	8050	IPX7	CI II, D2	■
	3310PL	3 AA Alkaline ^A	0.176	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline ^A	0.176	15.6	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8 (1m)	N/A	■ (photoluminescent)
	5000	2 AAA Alkaline ^A	0.068	14.2	202*, 21**	1h 15m*, 7h**	69*, 21**	1176*, 111**	IPX8 (1m)	N/A	■
	5010	2 AA Alkaline ^A	0.145	15.9	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8 (1m)	N/A	■
	5020	4 AAA Alkaline	0.207	14.9	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8 (1m)	N/A	■
	5050R	1 18650 Lithium ^A	0.164	15.6	393*, 21***, 883*****	2h 30m*, 40h**	134*, 30***, 201*****	4488*, 224**, 10093*****	IPX8 (1m)	N/A	■
	9050	2 18650 Lithium-Ion ^A	1.301	20.4	3369 (Spot/Flood), 1119 (Flood), 2623 (Spot)	2h 45m (Spot/Flood), 5h 30m (Flood), 4h 15m (Spot)	417 (Spot/Flood), 47 (Flood), 489 (Spot)	43568 (Spot/Flood), 559 (Flood), 59760 (Spot)	IP67	TBC	■
LARGE LIGHTS	9410L	6 Lithium-ion 18650 ^A	1.267	22.2	2207*, 463***	3h 15m*, 11h***	453*, 207***	51304*, 10710***	IPX4	N/A	■ ■

*High | **Medium | ***Low | *****Boost | ^A Batteries Included | Additional approvals may apply. For details go to www.peli.com

Cat No.	Batteries	Weight w/ Batteries (kg)	Length (cm)	ANSI Light Output	ANSI Runtime	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Approvals	Colours	
ATEX TORCHES	1930Z0	4 LR 44 Alkaline ^A	0.026	6.7	12	4h 15m	17	70	IPX4	II 1 G Ex ia op is IIC T6/T4 Ga	
	1975Z0	2 AAA Alkaline ^A	0.054	14.6	117	2h 15m	24	141	IP68	II 1 G Ex ia op is IIC T4 Ga	
	1975Z1	2 AAA Alkaline ^A	0.054	14.6	94	8h 15m	22	122	IP68	II 2 G Ex ib op is IIB T4 Gb	
	2010Z0	3 C Alkaline	0.38	20.6	129	22h	135	4582	IPX7	II 1 G Ex ia IIC T4 T3 Ga, II 1 D ia IIIC T135c T200c Da IP6X	
	2220Z1	2 CR2032 Lithium ^A	0.028	8.9	9	34h	12	38	IPX4	II 2 G Ex ib op is IIC T6 Gb	
	2315Z0	2 AA Alkaline ^A	0.13	15.8	115	6h	75	1403	IPX8	II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb	
	2410Z0	4 AA Alkaline ^A	0.207	17.8	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	
	2460Z1	4 AA Ni-MH ^A	0.221	17.8	181	5h	181	8235	IPX7	II 2 G Ex ib IIC T3 Gb	
	2610Z0	3 AAA Alkaline ^A	0.91	3.8	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	II 1 G Ex ia op is IIC T4 Ga	
	2690Z0	3 AAA Alkaline ^A	0.116	7.1	74	11h	92	2124	IPX7	I M1 Ex ia l Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da	
	2745Z0	3 AAA Alkaline ^A	0.94	5.7	33*, 17***	20h*, 40h***	35*, 25***	309*, 155***	IP54	II 1 G Ex ia op is IIC T4 Ga	
	2755Z0	3 AAA Alkaline ^A	0.096	5.7	115*, 58***	8h*, 16h***	61*, 43***	925*, 455***	IP54	II 1 G Ex ia op is IIC T4 Ga	
	2765Z0	3 AAA Alkaline ^A	0.096	5.7	141*, 27***	5h30m*, 14h***	78*, 9***	1512*, 22***	IP54	II 1 G Ex ia op is IIC T4 Ga	
	3315Z0	3 AA Alkaline ^A	0.176	15.6	138	19h	146	5350	IP67	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da	
	3335RZ0	1 Lithium-Ion 18650	0.130	15.5	246*, 30***	6h 15m*, 58h***	151*, 51***	5718*, 649***	IP67	III 1 G Ex ia IIC T4 Ga	
	3415MZ0	3 AA Alkaline	0.272	18.9	329 (Spot/Flood), 174 (Flood), 185 (Spot)	6h (Spot/Flood), 15h (Flood), 14h (Spot)	133 (Spot/Flood), 38 (Flood), 134 (Spot)	4425 (Spot/Flood), 354 (Flood), 4517 (Spot)	IPX8 (1m)	II 1 G Ex ia op is IIC T4 Ga	
	3610Z0	4 AA Alkaline	0.298	19.1	153	5h 45m	165	6837	IPX7	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da	
	3715Z0	4 AA Alkaline	0.408	13.6	189*, 90***, 23***	4h*, 7h***, 31h***	249*, 157***, 24***	15552*, 6150***, 150***	IPX4	II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da	
	3765Z0	4 AA NiMH ^A	0.414	13.6	194*, 92***, 24***	3h 30m*, 6h 45m***, 20h***	256*, 161***, 24***	16392*, 6454***, 146***	IPX4	II 1 G Ex ia op is IIC T3 Ga	
	9415Z0	4 C NiMH ^A	1.65	22.2	530*, 202***	4h 30m*, 11h 30m***	272*, 166***	18480*, 6914***	IPX4	II 1 G Ex ia IIC T4 Ga	

*High | **Medium | ***Low | ****Downcast | ^A Batteries Included | Additional approvals may apply. For details go to www.peli.com

Cat No.		Batteries	Weight w/ Batteries (kg)	Length (cm)	ANSI Light Output (lumens)	ANSI Run Time	ANSI Beam Distance (meters)	ANSI Peak Beam Intensity (candela)	ANSI IPX Rating	Certifications	Colours
Tactical Lights	7000	2 CR123 Lithium ^A	0.159	13.5	774*, 457**, 99***	1h 15m*, 1h 45m**, 13h***	246*, 176**, 83***	14768*, 7712**, 1738***	IPX7	N/A	■
	7060	1 Lithium-Ion ^A	0.295	22	402*, 162**, 18***	3h 30m*, 12h**, 57h***	210m*, 131m**, 45m***	11078*, 4312**, 500***	IPX4	N/A	■
	7600	1 Lithium-Ion 18650 ^A	0.196	15.7	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8 (1m)	N/A	■
	8060	4 C NiMH ^A	0.658	32.2	1072*, 551**, 29***	3h 45m*, 4h 15m**, 60h***	376*, 265**, 60***	35300*, 17520**, 889***	IPX6	N/A	■
Head Lamps	2720	3 AAA Alkaline ^A	0.108	6.3	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline ^A	0.094	5.7	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■
	2750	3 AAA Alkaline ^A	0.096	5.7	259*, 71***	2h 30m*, 11h***	90*, 48***	2041*, 573***	IPX4	N/A	■ ■ (photoluminescent)
	2760	3 AAA Alkaline ^A	0.096	5.7	289*, 156**, 97***, 42****	1h 30m*, 3h 15m**, 5h 30m***, 11h****	101*, 66**, 48***, 19****	2540*, 1097**, 567***, 88****	IPX4	N/A	■
	2780R	1 Lithium-Ion 18650 ^A	0.207	7.6	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ □ ■ (photoluminescent)

*High | **Medium | ***Low | ****Downcast | ^A Batteries Included | Additional approvals may apply. For details go to www.peli.com

SMALL LIGHTS PGS 06			MEDIUM TORCHES PGS 07 - 08					
1910	1920	1930	2010	2410	2460	3310PL	3310ELS	
								
MEDIUM TORCHES PGS 07 - 08			LARGE LIGHTS PGS 09			ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13		
5000	5010	5020	5050R	9050	9410L	1930Z0	1975Z0	1975Z1
								
ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13								
2010Z0	2220Z1	2315Z0	2410Z0	2460Z1	2610Z0	2690Z0	2745Z0	
								
ATEX TORCHES ZONE 0 & 1 (CAT. 1 & 2) PGS 10 - 13								
2755Z0	2765Z0	3315Z0	3415MZ0	3610Z0	3715Z0	3765Z0	9415Z0	
								
TACTICAL LIGHTS PGS 14 - 15				HEADLAMPS PGS 16 - 17				
7000	7060	7600	8060	2720	2740	2750	2760	2780R
								

*Only available upon minimum order quantities

LEARN MORE ABOUT + OUR PRODUCTS



www.peli.com



AVAILABLE IN 18 LANGUAGES!

www.pelicatalogue.com



www.peli.com/webinars



EMEA / www.peli.com

**EUROPE, MIDDLE EAST
& AFRICA HEADQUARTERS**
PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 7
08025 • Barcelona, Spain
Tel +34 934 674 999

FRANCE
PELI PRODUCTS FRANCE S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris, France
Tel +33 (0)1 44 83 95 63

UK
PELI HARDIGG UK
Unit 4, Brookfield Industrial Estate
Leacon Road
Ashford Kent TN23 4TU
Tel + 44 (0) 1233 895 895

GERMANY
PELI PRODUCTS GERMANY GmbH
Neudorfer Strasse 285 C
09474 Crottendorf
Germany
Tel +49 (0) 211 882 42 401

DENMARK
PELI PRODUCTS DENMARK APS
Midtermølen 1, 2. tv.
2100 Copenhagen, Denmark
Tel: +34 934 674 999

NETHERLANDS
PELI PRODUCTS NETHERLANDS B.V.
Basisweg, 10
1043AP Amsterdam,
The Netherlands
Tel +34 934 674 999

ITALY
PELI PRODUCTS ITALY S.R.L.
Viale Monte Nero, 84
20135 Milano, Italy
Tel +34 934 674 999

POLAND
PELI PRODUCTS POLAND SP. Z O.O.
ul. Stary Rynek 38-39
61-772 Poznań, Poland
Tel +34 934 674 999

UAE
PELICAN PRODUCTS FZE
JAFZA One Building A
office 1511/1512
Jebel Ali Free Zone gate 5
P.O.Box 261008
Dubai – United Arab Emirates
Tel +971 4 8876550

INDIA
PELICAN PRODUCTS AND
SERVICES INDIA PVT. LTD
Level "4", Augusta Point,
Sector-53,
Golf Course Road,
Gurgaon 122002 Haryana, India
Tel +91 124 4354148

U.S.A.

U.S.A. & GLOBAL HEADQUARTERS
23215 Early Avenue
Torrance, CA 90505 USA
Tel 310.326.4700
800.473.5422 (Outside CA)

* We also have offices in Canada, Japan, China, Australia and South Korea

PELI LIMITED LIFETIME* WARRANTY

Peli Products, S.L.U. ("Peli") guarantees its lights and headlamps for a lifetime* against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see www.peli.com/guarantee

* Lifetime guarantee not applicable where prohibited by law.

Distributed by:

Follow us on:



©2023 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com.
Part No. 0030-000-501E JUNE 23

PELInsights



Check out our latest posts on Peli Lights, get to know our Pro Users and take part in our different programs.

This and more on the brand new PELI blog!



Learn all about ATEX Directive 2014/34/EU

