



Based in Shenzhen, China, Fenix designs and manufactures incredible lighting products in its company-owned facility. Fenix is committed to create lights that not only feature the best in lighting technology, but are also built to the highest standards for durability and longevity. Unlike contract manufacturers or subcontractors, Fenix takes ownership of the quality and performance of each and every light and subjects each to a battery of tests from their quality assurance professionals—ensuring the light is built to last.

FENIX LIGHTING US is the United States distributor for the Fenix line of lighting products and is committed to providing you with the best customer service. With facilities in Littleton, CO and Monticello, AR, Fenix Lighting US is poised to fulfill your needs quickly and efficiently.

TABLE OF CONTENTS.

HEADLAMPS

HL Series									
HM Series									
HP Series							٠.		. 7
FLASHLIGHTS C Series									
C Series									1
E Series									
GL Series									
HT Series									
LD Series									
LR Series									
PD Series									
T6 Penlights									
TK Series									
WF Series									
WT Series									
									20
									St
									38
									1







TURB0	450	3h*			
		0.1	341ft (104m)	2700cd	
HIGH	150	8h	190ft (58m)	846cd	
MEDIUM	50	27h	105ft (32m)	261cd	
LOW	5	100h	33ft (10m)	24cd	
RED	5	100h	20ft (6m)	10cd	
SOS	5	200h	20ft (6m)	10cd	
IMPACT		withstands dro	ps up to 1.5m		
WATERPROOF	I	P66, dustproof/hea	vy splash, rainproof	f	
SIZE	Width: 2.52" (64mm) Height: 1.89" (48mm) Depth: 1.06" (27mm)				
WEIGHT	3.43 oz. (97.2g) including batteries and headband				









- APB-20 Gear BagAPB-30 Gear Bag
- Max 450 lumen output from the included three AAA batteries
- · Six modes including four spotlight brightness levels, red light, and SOS
- Wide, perforated headband; more stable and comfortable fit
- Made of quality PC material, lightweight and impact-resistant





MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
HIGH	240	8h*	207ft (63m)	980cd		
MEDIUM	70	16h	112ft (34m)	286cd		
LOW	4	100h	32ft (9.5m)	22cd		
IMPACT		withstands di	rops up to 2m			
WATERPROOF	IP68	8, waterproof under	water to 2m/dustp	roof		
SIZE	Length: 2.7" (Length: 2.7" (69.5mm) Width: 1.3" (32mm) Height: 1.6" (40mm)				
WEIGHT		1.5 oz. (43g) excluding battery				

- Max 240 lumen output from the included AA battery
- One switch controls three brightness levels
- Extremely light weight; 1.5 oz.
- Waterproof and dustproof



- ARB-L14 Battery
- ALD-02 Helmet Clips
- ♦ APB-20 Gear Bag
- APB-30 Gear Bag



BEST SELLER



	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
-	TURB0	1300	2h*	394ft (120m)	3400cd		
SPOTLIGHT	HIGH	350	8h	197ft (60m)	913cd		
l É	MEDIUM	130	18h	118ft (36m)	330cd		
S	LOW	30	54h	59ft (18m)	78cd		
	HIGH	350	8h	108ft (33m)	268cd		
FLOODLIGHT	MEDIUM	70	24h	49ft (15m)	55cd		
	LOW	5	300h	20ft (6m)	9cd		
	RED	5	100h	16ft (5m)	7cd		
۳	SOS	5	200h	16ft (5m)	7cd		
	IMPACT	withstands drops up to 2m					
W	ATERPROOF	IP68, dustproof/waterproof underwater to 2m					
	SIZE	Length: 3.35" (85mm) Width: 1.77" (45mm) Height: 1.77" (45mm)					
	WEIGHT	5.54 oz. (157g) including battery and headband					

- Max 1300 lumen output from an included 18650 rechargeable li-ion battery or two CR123A lithium batteries
- Nine modes including four spotlight levels, three floodlight levels, red light, and SOS
- · Stride frequency sensor; brightness changes with speed













- CR123A Battery
- ♦ ALG-03v2 Helmet Mount ◆ ALD-02 Helmet Clips
- APB-20 Gear Bag
- ♦ APB-30 Storage Bag



- Max 1600 lumen output from an included 18650 rechargeable li-ion battery
- Eight modes including five brightness levels, two red light levels, and red flash
- · Magnetic rechargeable with battery level indicator
- · Easily remove from the base to use as a right-angle flashlight with a magnetic base

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY			
TURB0	1600	2h*	531ft (162m)	6566cd			
HIGH	600	3h	318ft (97m)	2358cd			
MEDIUM	150	12h	154ft (47m)	557cd			
LOW	50	35h	92ft (28m)	190cd			
ECO	5	300h	30ft (9m)	20cd			
LOW	1	400h	-	-			
MEDIUM	5	80h	_	-			
RED FLASH	5	160h	_	-			
IMPACT		withstands dr	rops up to 2m				
WATERPROOF	IP6	IP68, waterproof underwater to 2m/dustproof					
SIZE	Length: 3.98"	(101mm) Width: 1.7	77" (45mm) Height:	1.42" (36mm)			
WEIGHT	5.36	oz. (152g) includin	g battery and head	band			











- ARB-L18 Battery
- CR123A Battery
- ♦ ALG-03v2 Helmet Mount
- ♦ ALD-02 Helmet Clips
- APB-20 Gear Bag
- APB-30 Storage Bag



	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
⊨	TURBO	1000	4h*	535ft (163m)	6677cd		
SPOTLIGHT	HIGH	400	22h	331ft (101m)	2600cd		
Ĕ	MEDIUM	130	42h	187ft (57m)	833cd		
🔯	LOW	50	90h	121ft (37m)	350cd		
	HIGH	400	20h	180ft (55m)	762cd		
FLOOD	MEDIUM	130	48h	98ft (30m)	220cd		
╙	LOW	8	280h	20ft (6m)	9cd		
	IMPACT	withstands drops up to 2m					
W	ATERPROOF	IP68, dustproof/waterproof underwater to 2m					
	SIZE	Length: 3.2" (80.5mm) Width: 2.2" (55mm) Height: 1.6" (40mm)					
	WEIGHT	3.4 oz. (97g) excluding battery					

- Max 1400 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- Seven modes including four spotlight brightness levels and three floodlight levels
- Type-C USB rechargeable with battery level indicator
- Dual switches for separate control of spotlight and floodlight

- ARB-L18 Battery
- CR123A Battery
- ♦ ALG-03v2 Helmet Mount
- ALD-02 Helmet Clips
- APB-20 Gear Bag
- ♦ APB-30 Storage Bag





	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
ا ـ ا	TURB0	2700	3h*	755ft (230m)	13300cd		
SPOTLIGHT	HIGH	800	5h	341ft (104m)	2705cd		
<u> </u>	MEDIUM	200	16h	171ft (52m)	686cd		
S	LOW	50	48h	89ft (27m)	181cd		
l ⊨	HIGH	500	8h	154ft (47m)	555cd		
FL00DLIGH	MEDIUM	200	16h	98ft (30m)	225cd		
	LOW	50	48h	46ft (14m)	50cd		
르	READ	5	400h	16ft (5m)	6cd		
	IMPACT	withstands drops up to 2m					
V	/ATERPROOF	IP68, dustproof/waterproof underwater to 2m					
	SIZE	Length: 4.17" (106mm) Width: 1.81" (46mm) Height: 1.77" (45mm)					
	WEIGHT	7.32 oz. (207.5g) including battery and headband					









- Max 2700 lumen output from an included 21700 rechargeable li-ion battery
- Eight modes including four spotlight levels and four neutral light floodlight brightness levels
- USB Type-C rechargeable port supports fast 2A charging current
- Remove from the headband to use as a rightangle flashlight with a magnetic base

- ARB-L18 Battery
- CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
 ALG-03v2 Helmet Mount ALD-02 Helmet Clips
- APB-20 Gear Bag
- ♦ APB-30 Storage Bag

DON'T FORGET TO ADD ACCESSORIES LIKE HELMET CLIPS



. Man 4000 looms		the alternate of the co-	- L L LL	
 Max 1250 lumen 	niithiit trom an	Inciliaea i i-n	nivmer natterv ni	΄ Δ ΔΔ ηρπειίες

- Nine modes including four spotlight levels, three floodlight levels, and red/ red flash
- USB type-C rechargeable

	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
₋	TURBO	1250	4h*	837ft (255m)	16260cd	
를	HIGH	400	8h	489ft (149m)	5549cd	
SPOTLIGHT	MEDIUM	150	12h	289ft (88m)	1943cd	
S	LOW	50	36h	171ft (52m)	681cd	
돌	HIGH	400	8h	157ft (48m)	583cd	
FL00DLIGHT	MEDIUM	150	12h	98ft (30m)	220cd	
	LOW	5	300h	20ft (6m)	11cd	
RED	LOW	5	300h	20ft (6m)	8cd	
=	SOS	5	600h	20ft (6m)	8cd	
	IMPACT	withstands drops up to 2m				
WA	TERPROOF		IP66, dustproof/I	heavy splash, rainp	roof	
	SIZE	Light: Length: 2.44" (62mm) Width: 1.85" (47mm) Height: 1.26" (32mm) Case: Length: 2.87" (73mm) Width: 0.98" (25mm) Height: 2.72" (69mm)				
WEIGHT 7.62 oz. (216g) including battery and headband				eadband		













- ♦ ALD-02 Helmet Clips
- APB-30 Storage Bag



	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
	TURB0	1600	2h*	951ft (290m)	20849cd		
봈	HIGH	1000	4h	748ft (228m)	13028cd		
SPOTLIGHT	MEDIUM	400	8h	459ft (140m)	4888cd		
SPC	LOW	150	24h	272ft (83m)	1732cd		
	EC0	50	56h	194ft (59m)	879cd		
	HIGH	400	8h	164ft (50m)	605cd		
FL00D	MEDIUM	150	24h	98ft (30m)	220cd		
"	LOW	5	400h	26ft (8m)	16cd		
æ	LOW	5	400h	20ft (6m)	11cd		
#	SOS	5	800h	20ft (6m)	11cd		
	IMPACT		withstands	drops up to 2m			
W	ATERPROOF	ı	P66, dustproof/h	neavy splash, rainp	roof		
	SIZE	Light: Length: 2.36" (60mm) Width: 1.85" (47mm) Height: 1.30" (33mm) Case: Length: 3.90" (99mm) Width: 1.61" (41mm) Height: 1.56" (39.5mm)					
	WEIGHT	8.40 oz. (238g) including battery and headband					











- ARB-L18 Battery
- CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ ALD-02 Helmet Clips
- APB-30 Storage Bag

- Max 1600 lumens from one included rechargeable 21700 li-ion battery
- · Independent spotlight, floodlight and red light
- Separate lamp and battery compartment for a more balanced/secure wear
- USB Type-C rechargeable

FOR THE EXTREMES



- Max 3000 lumen output from two included 21700 rechargeable li-ion batteries
- Eleven modes including four spotlight levels, three floodlight levels, and four combo levels
- USB Type-C rechargeable with discharge function to charge other devices

	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
	TURB0	2000	6h*	823ft (251m)	15733cd		
룔	HIGH	800	12h	512ft (156m)	6104cd		
SPOTLIGHT	MEDIUM	200	34h	256ft (78m)	1515cd		
s	LOW	50	120h	138ft (42m)	450cd		
	HIGH	1000	10h	256ft (78m)	1513cd		
FL00D	MEDIUM	200	34h	112ft (34m)	291cd		
"	LOW	50	120h	56ft (17m)	76cd		
g	TURB0	3000	5h*	886ft (270m)	17933cd		
SPOT+FL00D	HIGH	1800	6h	581ft (177m)	7881cd		
ŧ	MEDIUM	400	17h	279ft (85m)	1812cd		
တ္မ	LOW	100	60h	148ft (45m)	512cd		
	IMPACT	withstands drops up to 2m					
WA	TERPROOF	IP66, dustproof/heavy splash/rain resistant					
	SIZE	Light: Length: 3.62" (92mm) Width: 2.20" (56mm) Height: 1.73" (44mm) Case: Length: 4.21" (107mm) Width:1.97" (50mm) Height: 1.61" (41mm)					
	WEIGHT	15.4	1 oz. (437g) incli	uding battery and h	eadband		









- ARB-L18 Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ ALG-03v2 Helmet Mount
- ♦ ALD-02 Helmet Clips
- APB-30 Storage Bag







 Max 3000 lumen output from one included 21700 rechargeable li-ion battery Seven lighting modes including five brightness levels, strobe, and SOS

• USB Type-C rechargeable with battery level indicator

Magnetic base for hands-free use

- ARB-L18 Battery
- ARB-L21 Battery
- ALF-18 Battery Holder
- AOF-L Filter Adapter
- ♦ AOT-L Traffic Wand
- AOT-02 Traffic Wand ♦ ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- ALP-20 Holster
- ♦ ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY			
TURB0	3000	1h*	1542ft (470m)	55200cd			
HIGH	1400	2h	984ft (300m)	22500cd			
MEDIUM	400	7h	525ft (160m)	6400cd			
LOW	100	29h	262ft (80m)	1600cd			
EC0	30	68h	148ft (45m)	520cd			
STROBE	3000	_	_	_			
SOS	100	_	_	_			
IMPACT		withstands dr	rops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m						
SIZE	Length: 5.87"	Length: 5.87" (149mm) Head: 1.57" (40mm) Body: 1.06" (27mm)					
WEIGHT		6.07 oz. (172g) e	excluding battery				





MODE	LUMENC	RUN'	TIME	DISTANCE	INTENSITY
MODE	LUMENS	ALKALINE	NI-MH	DISTANCE	
HIGH	100	50min*	50min*	115ft (35m)	304cd
MEDIUM	25	4h 50min	4h 30min	62ft (19m)	88cd
LOW	5	25h	23h	30ft (9m)	21cd
IMPACT		withst	tands drops up	to 1m	
WATERPROOF		IP68, dustproof	/waterproof un	derwater to 2m	
SIZE	Length: 2.62" (66.5mm) Head: 0.59" (15mm) Body: 0.55" (14mm)				
WEIGHT		0.46 oz.	(13g) excluding	g battery	





- Max 100 lumen output from one included AAA battery
- Twist head for on/off and to choose between three brightness levels
- Ultra-compact, all-metal CNC machined body



MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
HIGH	200	25min*	161ft (49m)	591cd
LOW	15	6h 30min	43ft (13m)	39cd
IMPACT	withstands drops up to 1m			
WATERPROOF	IP68, dustproof/waterproof underwater to 2m			
SIZE	Length: 1.89" (48mm) Head: 0.59" (15mm) Body: 0.55" (14mm)			
WEIGHT	0.53 oz. (15g) including battery			







- Max 200 lumen output from the built-in 120 mAh li-polymer battery
- Twist head for on/off and to choose between two brightness levels
- Micro USB charging port for direct charging





MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
BURST	400	-	210ft (64m)	1046cd		
HIGH	150	55min*	131ft (40m)	412cd		
MEDIUM	25	5h	56ft (17m)	72cd		
LOW	3	30h	26ft (8m)	15cd		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 2.68" (68mm) Head: 0.60" (15.3mm) Body: 0.59" (15mm)					
WEIGHT		0.85 oz. (24g) ir	ncluding battery			







- Max 400 lumen output from the built-in 320mAh battery
- Three brightness levels plus a Burst mode for short blasts at 400 lumens
- Micro-USB rechargeable with hidden port
- Metal side switch operates all modes

EO9R 600 LUMENS	
	OPTIONAL ACCESSORIES
	◆ ALD-05 Helmet Mount









MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
BURST	600	_	407ft (124m)	3970cd	
HIGH	300	1h 30min*	299ft (91m)	2084cd	
MEDIUM	100	4h	184ft (56m)	777cd	
LOW	25	16h	92ft (28m)	192cd	
MOONLIGHT	3	70h	30ft (9m)	20cd	
IMPACT		withstands di	rops up to 1m		
WATERPROOF	IP68	IP68, dustproof/waterproof underwater to 2m			
SIZE	Length: 3.11" (79mm) Head: 0.76" (19.3mm) Body: 0.72" (18.4mm)				
WEIGHT		1.59 oz. (45g) ii	ncluding battery		

- Max 600 lumen output from the built-in 800mAh battery
- Four brightness levels plus a Burst mode for short blasts at 600 lumens
- USB Type-C rechargeable with hidden port
- Metal side switch operates all modes





MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
HIGH	160	1h	223ft (68m)	1133cd		
MEDIUM	30	13h	92ft (28m)	185cd		
LOW	5	70h	39ft (12m)	31cd		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68	3, dustproof/waterp	roof underwater to	2m		
SIZE	Length: 3.06" (76.6mm) Head: 0.75" (19mm) Body: 0.69" (17.6mm)					
WEIGHT	0.96 oz. (27.3g) excluding battery					

- Max 160 lumen output from a AA battery
- Tail switch operates three brightness levels
- Two-position body clip
- · Automobile ultra-thin optical lens

- ♦ ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount

BEST COMPACT

E18R v2.0 **1200 LUMENS**



FENTX ETER CO	
	• I












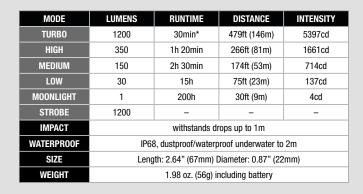

- Max 1200 lumen output from one included 16340 Li-ion battery
- USB Type-C charging with battery level indicator
- Easy and fast operation with a single switch
- · Magnetic tail for hands-free use
- Made of A6061-T aluminum with type HAIII hard-anodized anti-abrasive finish

OPTIONAL ACCESSORIES

- ♦ ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount





MODE	LUMENS	RUN	RUNTIME		INTENSITY
MODE	LUMENS	ALKALINE	NI-MH	DISTANCE	INTENSITY
HIGH	350	3h 45min*	1h 30min	413ft (126m)	3950cd
MEDIUM	150	11h 15min	5h 30min	249ft (76m)	1448cd
LOW	30	93h 35min	34h 30min	115ft (35m)	288cd
EC0	5	200h	140h	49ft (15m)	44cd
IMPACT		withs	tands drops up	to 1m	
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 5.0" (127mm) Body: 0.7" (16.8mm) Head: 0.8" (21mm)				
WEIGHT		1.5 oz. (42g) excluding	batteries	





- Max 350 lumen output from two AA batteries
- Four brightness levels
- Tactical tail switch operates on/off and brightness levels
- Handy and compact for everyday carry

- ♦ ALB-10 Bike Mount
- ALW-01 Wrist Mount



E28R V2.0
















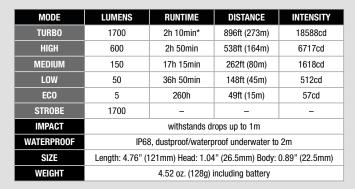

- Max 1700 lumen output from one included 18650 li-ion rechargeable battery or two CR123A lithium batteries
- Single side switch activates on/off and seven lighting modes; including five brightness levels, strobe, and pulse light
- USB Type-C rechargeable with battery level indicator
- Magnetic base for hands-free use

- ARB-L18 Battery
- CR123A Battery
- ♦ AOD-S V2.0 Diffuser Tip
- ◆ ALG-00 Rail Mount
 ◆ ALG-15 Rail Mount
- ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount



GLO6 600 LUMENS



- Max 600 lumens from one included 16340 rechargeable li-ion battery or 400 lumens from one CR123A lithium battery (not included)
- Ambidextrous switches operate on/off, momentary on, and strobe
- Fits most full-size and select compact pistols with a GLOCK or MIL-STD-1913 (Picatinny) rail

GL06-365 600 LUMENS









GL22 750 LUMENS



M	ODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
HIGH	ARB-L16-700UP	750	35min*	591ft (180m)	8000cd	
High	CR123A	500	1h	459ft (140m)	5000cd	
	ARB-L16-700UP	750	_	_	_	
STROBE -	CR123A	500	_	_	_	
RED 4	ARB-L16-700UP	_	17h	_	_	
LASER	CR123A	-	24h	-	-	
IM	PACT		withstands dr	rops up to 1m		
WATE	RPR00F	IP66, dustproof/heavy splash, rainproof				
S	SIZE	Length: 2.64" (67mm) Width: 1.22" (31mm) Height: 1.65" (42mm)				
WE	IGHT	3.32 oz. (94g) including battery				







OPTIONAL ACCESSORIES

◆ ARB-L16 Battery

- Max 750 lumens from one included 16340 rechargeable li-ion battery or one CR123A lithium battery
- Three lighting modes including white light, white light and red laser, red laser only, and strobe
- Ambidextrous operation with dual switches
- Fits most full size pistols with a Glock or MIL-STD-1913 (Picatinny) rail

















MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
TURB0	2800	1h 40min*	3609ft (1100m)	300000cd		
HIGH	1000	2h 15min	2198ft (670m)	113000cd		
MEDIUM	350	6h 30min	1312ft (400m)	40000cd		
LOW	30	42h	328ft (100m)	3000cd		
SOS	150	40h	656ft (200m)	10000cd		
STROBE	2600	_	_	_		
IMPACT		withstands drops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 7.42" (188.5mm) Head: 2.68" (68mm) Body: 1.00" (25.4mm)					
WEIGHT	·	11.5 oz. (326g)	including battery			

- ARB-L18 Battery
- CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ ALR-01 Tac Ring
- - ALB-10 Bike Mount



Max 500 lumen output from the included 21700 rechargeable Li-ion battery

Class 1 laser emits a broad spectrum white light, similar to the LED spectrum,

but eliminates the harmful beam a monochromatic light produces.

Three modes including two brightness levels and strobe

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
HIGH	500	2h 20min*	4921ft (1500m)	600000cd		
LOW	100	7h 15min	2067ft (630m)	100000cd		
STROBE	500	-	-	-		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 7.05" (179mm) Head: 1.57" (40mm) Body: 1.02" (26mm)					
WEIGHT		9.31 oz. (264g) including battery				



Six lighting modes including four brightness levels, strobe, and SOS

USB Type-C rechargeable with battery level indicator

• Includes red and green filters









AOT-L Traffic Wand ♦ AOT-02 Traffic Wand

- ALG-00 Rail Mount
- ALG-15 Rail Mount
- ALG-16 Rail Mount

OPTIONAL ACCESSORIES

- Al G-18 Rail Mount
- AER-04 Remote Switch ♦ AER-05 Remote Switch
- ALP-20 Holster
- ♦ ALR-01 Tac Ring
- ♦ ALD-05 Helmet Mount

2500 LUMENS

Dual tail switches for easy operation



- Max 2500 lumen output from an included 21700 rechargeable li-ion battery
- Nine modes including four brightness levels, strobe, two red light levels, and two green light levels
- Dual tail switch operation

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
TURB0	2500	1h 50min*	2100ft (640m)	101000cd	
HIGH	1000	2h 30min	1378ft (420m)	43200cd	
MEDIUM	350	8h	853ft (260m)	15000cd	
LOW	50	29h	328ft (100m)	2300cd	
RED LOW	150	4h 50min	230ft (70m)	1100cd	
RED HIGH	400	3h 15min	394ft (120m)	3120cd	
GREEN LOW	350	6h	328ft (100m)	2500cd	
GREEN HIGH	1400	2h 30min	689ft (210m)	11000cd	
IMPACT		withstands di	rops up to 1m		
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 6.3" (Length: 6.3" (160mm) Head: 2.05" (52mm) Body: 1.0" (25.4mm)			
WEIGHT	-	6.53 oz. (185g) e	excluding battery		













- ARB-L18 Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ALG-00 Rail Mount
- ALG-15 Rail Mount ALG-16 Rail Mount
- ALG-18 Rail Mount
- ♦ AER-04 Remote Switch AER-05 Remote Switch
- ALP-20 Holster
- ♦ ALB-10 Bike Mount
- ALD-05 Helmet Mount

600 LUMENS

- Max 600 lumens from one included rechargeable 14500 li-ion battery
- Seven modes including four brightness levels from the main light and three levels from the side light
- Magnetic clip for hands-free lighting
- USB Type-C rechargeable



OPTIONAL ACCESSORIES

- ARB-L14 Battery
- ALB-10 Bike Mount
- ALD-05 Helmet Mount

4		
	5	6
1	0	1,0
1t	9	
- 10		
A		
n.		

LD15R

- Max 500 lumen output from one 16340 rechargeable Li-ion battery (included) or a CR123A lithium battery
- Seven modes including four brightness levels, SOS, red light, and red flashing
- Micro-USB rechargeable with battery level indicator
- Two-way body clip and magnetic tail



RECHARGEABLE	RED LED	FLASHIN
BATTERIES INCLUDED	BATTERY LEVEL INDICATOR	• • • · · · · · · · · · · · · · · · · ·

OPTIONAL ACCESSORIES

- ARB-L16 Battery
- CR123A Battery

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
TURB0	500	1h 20min*	279ft (85m)	1800cd	
HIGH	150	2h 50min	151ft (46m)	530cd	
MEDIUM	30	13h 20min	75ft (23m)	135cd	
LOW	3	110h	20ft (6m)	9cd	
RED	4	30h	16ft (5m)	6cd	
RED FLASH	4	_	_	_	
SOS	4	_	_	_	
IMPACT		withstands dr	rops up to 1m		
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 2.8" (70mm) Body Width: 0.75" (19mm)				
WEIGHT		1.4 oz. (40g) weigh	nt excluding battery		

N	MODE		RUNTIME	DISTANCE	INTENSITY
	HIGH	600	1h 20min*	610ft (186m)	8616cd
MAIN	MEDIUM	150	3h 20min	295ft (90m)	2052cd
LIGHT	LOW	30	16h 20min	131ft (40m)	424cd
	MOON	1	_	30ft (9m)	18cd
0.00	HIGH	100	4h	39ft (12m)	38cd
SIDE Light	MEDIUM	30	14h 30min	23ft (7m)	12cd
Z.G.III	LOW	5	_	10ft (3m)	3cd
IM	IPACT	withstands drops up to 1m			
WATE	RPR00F	IP68, dustproof/waterproof underwater to 2m			
	SIZE	Length: 4.76" (121mm) Head: 0.87" (22mm) Body: 0.75" (19mm)			
W	EIGHT	2.61 oz. (74g) including battery			

LD22 v2.0













OPTIONAL ACCESSORIES

- ♦ AOD-S V2.0 Diffuser
- ♦ ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

MOD	E	EC0	LOW	MED	HIGH	TURB0	STROBE	SOS
OUTPUT	AA	2	30	100	350	_	350	100
LUMENS	PACK	2	30	100	350	800	800	100
RUNTIME	AA	190h	19h 45mn	5h 50mn	1h 15mn	-	_	-
KUNTIME	PACK	220h	22h 20mn	7h	1h 40mn	54min*	_	
DISTA	NCE	36ft (11m)	141ft (43m)	249ft (76m)	466ft (142m)	702ft (214m)	_	-
INTENS	SITY	30cd	460cd	1440cd	5000cd	11500cd	-	-

 Seven lighting modes including five brightness levels, strobe, and SOS

• Max 800 lumen output from the included rechargeable li-ion battery pack or 350 lumens from two AA batteries

Included USB Type-C rechargeable battery pack

Tail switch and side switch operation

	PACK	220h	22h 20mn	/h	1h 40mn	54min*	_	
DISTAI	NCE	36ft (11m)	141ft (43m)	249ft (76m)	466ft (142m)	702ft (214m)	-	-
INTENS	SITY	30cd	460cd	1440cd	5000cd	11500cd	-	-
IMPA	CT	1m						
WATERP	R00F	IP68, waterproof underwater to 2m, dustproof						
SIZ	E	Length: 5.83" (148mm) Head: 0.85" (21.5mm) Body: 0.71" (18mm)						
WEIG	HT	3.39 oz. (96g) including battery						

BEST SELLER

LD30 1600 LUMENS



- Max 1600 lumen output from one 18650 li-ion battery or two CR123A lithium batteries in an emergency
- Seven lighting modes including five brightness levels, strobe and SOS
- Tactical tail switch and mode selecting side switch
- Battery level indicator

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
TURB0	1600	1h 30min*	673ft (205m)	10302cd
HIGH	800	1h 55min	492ft (150m)	5798cd
MEDIUM	350	5h 30min	312ft (95m)	2151cd
LOW	150	17h 30min	197ft (60m)	950cd
EC0	30	70h 30min	82ft (25m)	192cd
SOS	30	-	-	_
STROBE	1600	_	-	_
IMPACT		withstands dr	ops up to 1m	
WATERPROOF	IP68, dustproof/waterproof underwater to 2m			
SIZE	Length: 4.3" (109mm) Head: 1.0" (25.4mm) Body: 0.9" (21.5mm)			
WEIGHT		2.1 oz. (59g) ex	cluding battery	













OPTIONAL ACCESSORIES

- ARB-L18 Battery ♦ ALG-15 Rail Mount CR123A Battery
- ♦ ALG-16 Rail Mount AOD-S V2.0 Diffuser ♦ ALG-18 Rail mount
- A0FS+ Filter Adapter ♦ AOT-S+ Traffic Wand
- ♦ ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

NEW



- Max 1700 lumen output from one included 18650 li-ion rechargeable battery or two CR123A non-rechargeable lithium batteries
- Seven lighting modes including five brightness levels, Strobe, and SOS
- USB Type-C rechargeable with battery level indicator
- Two-way body clip

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
TURB0	1700	2h 10min*	843ft (257m)	18037cd	
HIGH	600	2h 50min	528ft (161m)	6500cd	
MEDIUM	150	14h 40min	262ft (80m)	1605cd	
LOW	50	37h 25min	148ft (45m)	510cd	
MOONLIGHT	1	750h	26ft (8m)	16cd	
SOS	50	_	_	_	
STROBE	1700	_	_	_	
IMPACT	withstands drops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 5.11" (129.7mm) Head: 1.04" (26.5mm) Body: 0.89" (22.6mm)				
WEIGHT		4.66 oz. (132g) i	ncluding battery		













- ARB-L18 Battery
- CR123A Battery
- AOD-S V2.0 Diffuser

- ♦ A0FS+ Filter Adapter
- AOT-S+ Traffic Wand ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail mount
- ALP-10 Holster
- ♦ ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

BEST SELLER

LR35R 10000 LUMENS



MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
TURB0	10000	1h 25min*	1640ft (500m)	63200cd
HIGH	3000	1h 35min*	886ft (270m)	18020cd
MEDIUM	1200	3h 15min	558ft (170m)	7078cd
LOW	450	8h 20min	344ft (105m)	2686cd
EC0	50	80h	98ft (30m)	256cd
STROBE	10000	_	_	_
IMPACT		withstands d	rops up to 1m	
WATERPROOF	IP68, dustproof/waterproof underwater to 2m			
SIZE	Length: 5.5" (140mm) Head: 2.0" (51.5mm) Height: 1.8" (46.5mm)			
WEIGHT		8.4 oz. (239g) ex	cluding batteries	









OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- ♦ ALF-18 Battery Holder
- ◆ ARB-L21 Battery

 Max 10000 lumen output from two included 21700 rechargeable li-ion batteries

- Six modes including five brightness levels and strobe
- USB Type-C rechargeable with battery level indicator
- Intelligent overheat protection against high temperatures

WEIGHT

LR40R v2.0
15000 LUMENS

- Max 15000 lumen output from the built-in battery pack constructed from three 5000mAh batteries
- 16 modes including 4 spotlight levels, 5 floodlight levels, 5 combo modes, strobe, and SOS
- Fast USB Type-C charging and power bank capability to charge other devices
- Rotating mode switch with push button level switch

















IV	IODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
	Eco	10	177h	197ft (60m)	812cd
플	Low	500	14h 10min	1247ft (380m)	35272cd
SPOTLIGHT	Med	1500	3h 40min	2133ft (650m)	106416cd
S	High	3000	3h	2953ft (900m)	196464cd
	Eco	100	50h	98ft (30m)	251cd
돌	Low	1000	11h	328ft (100m)	2385cd
FLOODLIGHT	Med	3000	3h	558ft (170m)	7264cd
92	High	8000	2h 30min	919ft (280m)	19580cd
	Turbo	12000	2h 30min*	1115ft (340m)	28189cd
	Eco	300	25h	820ft (250m)	15153cd
SPOT + FLOOD	Low	1500	6h	1312ft (400m)	37501cd
+	Med	5000	2h 40min	1969ft (600m)	87344cd
POT	High	10000	2h 30min	2559ft (780m)	153188cd
S	Turbo	15000	2h 30min*	2953ft (900m)	203568cd
FLASH	Strobe	15000	_	-	_
7	SOS	500	_	-	_
IN	IPACT		withstands dr	ops up to 1m	
WATI	ERPROOF	IP6	8, dustproof/waterp	roof underwater to	2m
	SIZE	Length: 6.89" (175mm) Head: 3.23" (82mm) Body: 2.17" (55mm)			2.17" (55mm)

29.7 oz. (842.5g) including battery

OPTIONAL ACCESSORIES

None

LR50R



	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
	Eco	50	58h	230ft (70m)	1200cd		
ODE	Low	350	24h	541ft (165m)	6850cd		
N I	Med	1000	7h 40min	919ft (280m)	19800cd		
GENERAL MODE	High I	3000	2h 40min	1575ft (480m)	58200cd		
GEN	High II	6000	2h 20min*	2264ft (690m)	118400cd		
	Turbo	12000	1h 50min*	3117ft (950m)	225750cd		
MODE	Turbo	12000	1h 50min*	3117ft (950m)	225750cd		
8 €	Strobe	6000	_	_	_		
TAC	SOS	350	-	-	_		
	IMPACT		withstands drops up to 1m				
WA	ATERPROOF	IP68, dustproof/waterproof underwater to 2m					
	SIZE	Length: 6.42" (163mm) Width: 3.46" (88mm) Height: 2.36" (60mm)					
	WEIGHT		34.8 oz. (986g) including battery				

- Max 12000 lumen output from the included Li-ion battery pack; one to four 21700 batteries can be used in an emergency
- Eight modes including two operating modes, six brightness levels, strobe, and SOS
- USB Type-C charging and discharge for charging mobile devices
- Intelligent brightness downshifting sensor to avoid dangers due to high temperature










ARB-L18 Battery ALF-18 Battery Holder

ARB-L21 Battery







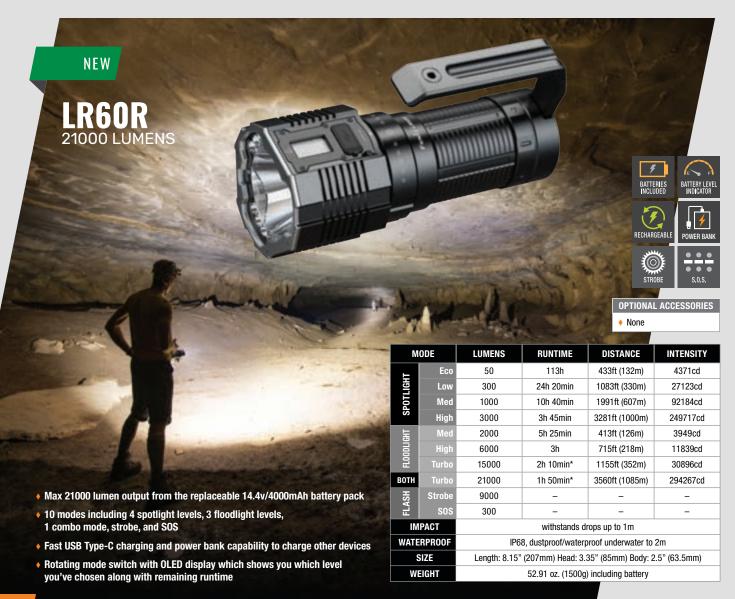

LR80R 18000 LUMENS



M	ODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
Ħ	Low	3000	5h 10min	1526ft (465m)	54000cd
High-Output Mode	Medium	6000	2h 50min	2133ft (650m)	105000cd
gh-(g Mo	High	12000	2h 15min	3018ft (920m)	211700cd
王	Turbo	18000	2h*	3707ft (1130m)	318000cd
	Eco	50	300h	164ft (50m)	590cd
Low-Output Mode	Low	150	92h	344ft (105m)	2700cd
out N	Medium	450	39h	574ft (175m)	7550cd
i di	High	1000	15h 40min	869ft (265m)	17750cd
,0 -Mo	Strobe	6000	-	-	-
	SOS	150	-	-	-
IM	IMPACT withstands drops up to 1m				
WATE	WATERPROOF IP68, dustproof/waterproof underwater to 2m			2m	
SIZE Length: 10.2" (259mm) He			259mm) Head: 4.2	25" (108mm) Body	r: 2.13" (54mm)
W	IGHT		57.7 oz. (1636g)	including battery	











OPTIONAL ACCESSORIES

None



 Dual switch controls two modes; four brightness levels for High-Output Mode and six modes for Low-Output Mode which includes four brightness levels, strobe, and SOS

• USB Type-C Rechargeable with 45W fast charging



PD32 V2.0 1200 LUMENS



- ♦ Max 1200 lumen output from one 18650 li-ion battery or two CR123A batteries
- Four modes including three brightness levels and strobe
- Multi-functional tail switch operates on/off and all lighting modes
- · High performance and far-reaching beam

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
HIGH	1200	2h 40min*	1295ft (395m)	39000cd	
MEDIUM	350	5h 20min	715ft (218m)	11900cd	
LOW	30	82h	180ft (55m)	760cd	
STROBE	1200	-	-	-	
IMPACT	withstands drops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 5.09" (129.4mm) Body: 0.93" (23.6mm) Head: 1.0" (25.4mm)				
WEIGHT	2	2.89 oz. (82g) weight excluding battery			







OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- AOD-S V2.0 Diffuser
- ♦ AOFS+ Filter Adapter
- ♦ AOT-S+ Traffic Wand
- ALG-00 Rail Mount
- ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount ♦ ALG-18 Rail Mount
- AER-02 V2.0 Switch
- ALP-10 Holster
- ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount



PD35 v3.0



- Max 1700 lumens from one included 18650 rechargeable li-ion battery or two CR123As
- Six lighting modes including five brightness levels and strobe
- Boot-up battery level indicator
- Tactical tail switch and mode selecting side switch

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
TURB0	1700	1h 25min*	1171ft (357m)	31900cd		
HIGH	600	2h 35min	709ft (216m)	11700cd		
MEDIUM	150	8h 30min	358ft (109m)	3000cd		
LOW	50	26h 25min	207ft (63m)	1000cd		
ECO	5	230h	66ft (20m)	100cd		
STROBE	1700	_	_	_		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 5.28" (134mm) Head: 1.00" (25.4mm) Body: 0.9" (22.8mm)					
WEIGHT		2.95 oz. (83.5g)	excluding battery			









- ARB-L18 Battery
- CR123A Battery
- ♦ AOD-S V2.0 Diffuser
- AOFS+ Filter Adapter ♦ AOT-S+ Traffic Wand
- ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount
- ♦ ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- AER-02 V2.0 Switch
- ALP-10 Holster
- ♦ ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount

PD35R



- ♦ Max 1700 lumen output from one included 18650 li-ion rechargeable battery or two CR123A lithium batteries (not rechargeable)
- Six lighting modes including five brightness levels and strobe
- USB Type-C rechargeable with battery level indicator
- Dual tail switch design controls on/off and all lighting modes

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
TURB0	1700	2h 15min*	1158ft (353m)	31200cd	
HIGH	1000	2h 55min	912ft (278m)	19300cd	
MEDIUM	350	4h 45min	535ft (163m)	6680cd	
LOW	50	38h	197ft (60m)	930cd	
ECO	10	100h	85ft (26m)	170cd	
STROBE	1700	-	-	_	
IMPACT	withstands drops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 5.35" (136mm) Body: 0.91" (23.2mm) Head: 1.00" (25.4mm)				
WEIGHT		4.94 oz. (140g)	including battery		











- ARB-L18 Battery
- CR123A Battery
- AOD-S V2.0 Diffuser
- ♦ AOFS+ Filter Adapter ♦ AOT-S+ Traffic Wand
- ALG-00 Rail Mount ♦ ALG-15 Rail Mount

OPTIONAL ACCESSORIES

- ♦ ALG-16 Rail Mount ♦ ALG-18 Rail Mount
- AER-02 V2.0 Switch
- ALP-10 Holster
- ♦ ALB-10 Bike Mount
- ♦ ALW-01 Wrist Mount
- ♦ ALD-05 Helmet Mount



- Max 1700 lumen output from one included 21700 li-ion rechargeable battery
- · Six lighting modes including five brightness levels and strobe
- USB Type-C rechargeable with battery level indicator
- Charging port supports up to 18W fast charging

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
TURBO	1700	3h 30min*	1299ft (396m)	39240cd		
HIGH	800	4h 15min	879ft (268m)	18016cd		
MEDIUM	350	7h 45min	581ft (177m)	7809cd		
LOW	50	50h	220ft (67m)	1107cd		
ECO	5	482h	62ft (19m)	89cd		
STROBE	1700	_	_	_		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 5.54" (140.7mm) Head: 1.04" (26.5mm) Body: 1.00" (25.5mm)					
WEIGHT		5.89 oz. (167g)	including battery			















- CR123A Battery
- ARB-L21 Battery ♦ AOT-S+ Traffic Wand
- AOD-S V2.0 Diffuser

OPTIONAL ACCESSORIES

- ♦ ALP-10 Holster
- ♦ ALG-18 Rail Mount ♦ ALP-20 Holster

♦ ALG-15 Rail Mount

ALG-16 Rail Mount

ALG-00 Rail Mount



PD36 TAC **3000 LUMENS**



MO	DE	LUMENS	RUNTIME	DISTANCE	INTENSITY
	TURB0	3000	1hr 30min*	899ft (274m)	18700cd
	HIGH	1000	3h 15min	525ft (160m)	6400cd
DUTY	MEDIUM	350	10h 10min	302ft (92m)	2100cd
MODE	LOW	150	18h 45min	194ft (59m)	900cd
	EC0	30	43h 10min	82ft (25m)	160cd
	STROBE	2000	_	_	-
TAC MODE	HIGH	2000	3h 10min	738ft (225m)	12600cd
IAG MIODE	STROBE	2000	_	_	-
IMP	ACT	withstands drops up to 1m			
WATER	RPROOF	IP68, dustproof/waterproof underwater to 2m			
SI	ZE	Length: 5.51" (140mm) Head: 1.04" (26.5mm) Body: 1.00" (25.4mm)			
WE	GHT	3.24 oz. (92g) excluding battery			

- Max 3000 lumen output from one included 21700 rechargeable li-ion battery
- Two operating modes; Tactical operates high and strobe, Duty operates five brightness levels and strobe
- Rotary mode switch with lock-out function and tactical tail switch







ARB-L18 Battery

OPTIONAL ACCESSORIES

- CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- AOD-S V2.0 Diffuser
- AOT-S+ Traffic Wand
- ALG-00 Rail Mount ♦ ALG-15 Rail Mount
- ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount
- ♦ AER-04 Remote Switch
- ♦ AER-05 Remote Switch ALP-10 Holster
- ♦ ALR-01 Tac Ring
- ♦ ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

NEW **3000 LUMENS**



- MODE LUMENS RUNTIME DISTANCE INTENSITY **TURBO** 3000 2h 40min* 1640ft (500m) 60954cd HIGH 1000 984ft (300m) 22648cd 3h 10min MEDIUM 350 8h 30min 547ft (175m) 7684cd LOW 30 89h 164ft (50m) 612cd 350 STROBE 3000 IMPACT withstands drops up to 1m WATERPROOF IP68, dustproof/waterproof underwater to 2m SIZE Length: 5.63" (143mm) Head: 1.34" (34mm) Body: 1.02" (26mm) WEIGHT 6.98 oz. (198g) including battery
- Max 3000 lumen output from one included 21700 rechargeable li-ion battery
- · Six lighting modes including four brightness levels, SOS, and Strobe
- USB Type-C rechargeable with battery level indicator
- Patented mechanical rotary mode switch













- ARB-L18 Battery CR123A Battery
- ♦ ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ AOD-M Diffuser
- ♦ ALG-00 Rail Mount
- ♦ ALG-16 Rail Mount
- ALG-18 Rail Mount
- ALP-10 Holster
- ♦ ALP-20 Holster
- ♦ ALB-10 Bike Mount



MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
HIGH	80	40min*	59ft (18m)	82cd		
MEDIUM	20	2h 30min	39ft (12m)	22cd		
LOW	1	26h	16ft (5m)	1cd		
IMPACT	withstands drops up to 1m					
WATERPR00F	IP66, dustproof/heavy splash, rainproof					
SIZE	Length: 5.51" (140mm) Diameter: 0.55" (14mm)					
WEIGHT	1.16 oz. (33g) including battery					

- Max 80 lumen output from the built-in 100mAh li-polymer battery
- Three brightness levels
- USB Type-C rechargeable with battery level indicator
- · Glass breaking bead tip made of silicon nitride





None









- Max 1600 lumen output from the included 18650 rechargeable Li-ion battery or two CR123As
- · Four modes including three brightness levels and strobe
- USB Type-C rechargeable with battery level indicator
- · Dual tail switches for easy operation

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
TURB0	1600	1h 50min*	1378ft (420m)	45000cd		
HIGH	350	4h 10min	656ft (200m)	10300cd		
MEDIUM	30	25h 30min	197ft (60m)	830cd		
STROBE	1600	-	_	-		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 5.73" (145.5mm) Head: 1.34" (34mm) Body: 0.93" (23.5mm)					
WEIGHT	4.14 oz. (117.5g) excluding battery					











OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- AOD-M Diffuser
- AOT-M Traffic Wand ♦ ALG-00 Rail Mount
- ♦ ALG-15 Rail Mount ALG-16 Rail Mount
- ALG-18 Rail Mount
- AER-02 V2.0 Switch ALP-10 Holster
- ♦ ALP-20 Holster
- ♦ ALB-10 Bike Mount
- ALD-05 Helmet Mount

TK16 **V2.0**



- Max 3100 lumen output from one included 21700 rechargeable li-ion battery
- · Six lighting modes including five brightness levels and strobe
- Dual tactical tail switches operate instant activation and all lighting modes
- Stainless steel strike bezel with tungsten steel breaking tips

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY	
TURB0	3100	2h 40min*	1247ft (380m)	36100cd	
HIGH	1000	2h 50min	722ft (220m)	12000cd	
MEDIUM	350	8h 20min	410ft (125m)	3900cd	
LOW	150	19h 10min	262ft (80m)	1650cd	
ECO	30	43h 20min	131ft (40m)	330cd	
STROBE	3100	_	_	_	
IMPACT	withstands drops up to 1m				
WATERPROOF	IP68, dustproof/waterproof underwater to 2m				
SIZE	Length: 5.63" (143mm) Head: 1.34" (34mm) Body: 1.0" (25.4mm)				
WEIGHT		3.95 oz. (112g) e	excluding battery		











- ARB-L18 Battery
- CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ AOD-M Diffuser
- AOFL Filter Adapter
- AOT-M Traffic Wand
- ♦ ALG-00 Rail Mount ALG-15 Rail Mount
- ALG-16 Rail Mount ALG-18 Rail Mount
- ♦ AER-04 Remote Switch
- AER-05 Remote Switch ALP-10 Holster
- ALP-20 Holster
- ALR-01 Tac Ring
- ♦ ALB-10 Bike Mount
- ALD-05 Helmet Mount







7.69 oz. (218g) including battery










- ♦ AER-05 Remote Switch
- ALP-20 Holster
- ALR-01 Tac Ring
- ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

WEIGHT

TK26R





- · Seven modes including four white levels, strobe, red light, and green light
- USB Type-C rechargeable with battery level indicator
- · Tactical tail switch, color switch, and side mode switch

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
TURB0	1500	1h 25min	1148ft (350m)	30150cd		
HIGH	350	4h 40min	558ft (170m)	7112cd		
MEDIUM	150	10h 50min	361ft (110m)	3102cd		
LOW	10	100h	98ft (30m)	213cd		
STROBE	1500	_	_	_		
RED	150	4h 20min	98ft (30m)	218cd		
GREEN	200	5h 10min	131ft (40m)	452cd		
IMPACT		withstands dr	rops up to 1m			
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 5.9" (150mm) Head: 1.6" (40mm) Body: 1.0" (25.4mm)					
WEIGHT		5.5 oz. (157g) excluding battery				











OPTIONAL ACCESSORIES

- ARB-L18 Battery CR123A Battery
- ♦ AOD-M Diffuser
- ♦ AOFL Filter Adapter
- ♦ AOT-L Traffic Wand
- ♦ AOT-02 Traffic Wand
- ALG-00 Rail Mount
- ALG-15 Rail Mount ALG-16 Rail Mount
- ALG-18 Rail Mount
- AER-03 V2.0 Switch
- ALB-10 Bike Mount
- ♦ ALD-05 Helmet Mount

TK30 WHITE LASER FLASHLIGHT



- Max 500 lumen output from the included 21700 rechargeable Li-ion battery
- · Three modes including two brightness levels and strobe
- Class 3B laser stimulates a fluorescent crystal to create a broad spectrum white light
- Tactical tail switch for instant activation

MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY		
HIGH	500	3h	3937ft (1200m)	363866cd		
LOW	100	6h	1969ft (600m)	89600cd		
STROBE	500	_	_	_		
IMPACT	withstands drops up to 1m					
WATERPROOF	IP68, dustproof/waterproof underwater to 2m					
SIZE	Length: 6.2" (158mm) Head: 1.3" (32mm) Body: 1.0" (26mm)					
WEIGHT	5.15 oz. (146g) excluding battery					







OPTIONAL ACCESSORIES

- ARB-L18 Battery CR123A Battery
- ALF-18 Battery Holder
- ARB-L21 Battery
- ♦ ALG-00 Rail Mount
- ALG-15 Rail Mount
- ALG-16 Rail Mount
- ♦ ALG-18 Rail Mount AER-04 Remote Switch
- ALP-20 Holster
- ALR-01 Tac Ring
- ALD-05 Helmet Mount

TK35UE v2.0 **5000 LUMENS**



- Max 5000 lumen output from two 18650 rechargeable li-ion batteries or four CR123A lithium batteries (*batteries not included)
- Two operating modes; Tactical operates high and strobe, Duty operates five brightness levels and strobe
- Rotary mode switch with lock-out function and tactical tail switch

N	MODE		RUNTIME	DISTANCE	INTENSITY	
	TURB0	5000	1h 40min*	1312ft (400m)	40000cd	
21127	HIGH	2000	2h	820ft (250m)	15200cd	
DUTY MODE	MEDIUM	800	4h	525ft (160m)	6100cd	
	LOW	350	13h 40min	328ft (100m)	2500cd	
	EC0	30	85h	105ft (32m)	250cd	
TACTICAL	TURB0	3500	1h 50min	1050ft (320m)	26000cd	
MODE	STROBE	3500	_	_	-	
IN	IMPACT		withstands drops up to 1m			
WAT	WATERPROOF		IP68, dustproof/waterproof underwater to 2m			
	SIZE Le			Length: 5.63" (143mm) Head: 1.69" (43mm)		
W	EIGHT	7.13 oz. (202g) excluding batteries				









OPTIONAL ACCESSORIES

ARB-L18 Battery CR123A Battery







MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
HIGH	85	11h 30min	177ft (54m)	724cd
MEDIUM	30	35h	95ft (29m)	210cd
LOW	10	80h	59ft (18m)	77cd
IMPACT	withstands drops up to 1m			
WATERPROOF	IP68, dustproof/waterproof underwater to 2m			
SIZE	Length: 5.3" (134.5mm) Body: 0.6" (14.9mm) Head: 0.7" (19mm)			
WEIGHT	1.3 oz. (38g) excluding batteries			

- Max 85 lumen output from two AAA batteries
- Three brightness levels
- Intrinsically safe for use in hazardous areas
- Made of durable high-strength and oxidationresistant aluminum



None



MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
HIGH	200	10h	607ft (185m)	8512cd
MEDIUM	100	29h 30min	463ft (141m)	4972cd
LOW	30	70h	266ft (81m)	1652cd
IMPACT	withstands drops up to 1m			
WATERPROOF	IP67, dustproof/waterproof underwater to 1m			
SIZE	Length: 6.6" (167.5mm) Body: 0.9" (24mm) Head: 1.9" (49mm)			
WEIGHT	5.6 oz. (160g) excluding batteries			

- Max 200 lumen output from three AA batteries
- Three brightness levels
- Intrinsically safe for use in hazardous areas
- Magnetic tail and body clip



OPTIONAL ACCESSORIES

None

WF30RE 280 LUMENS



MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
HIGH	280	6h 50min	558ft (170m)	7200cd
MEDIUM	120	15h 40min	394ft (120m)	3589cd
LOW	30	120h	190ft (58m)	830cd
STROBE	280	_	_	_
IMPACT	withstands drops up to 1m			
WATERPROOF	IP68, waterproof underwater to 2m/dustproof			
SIZE	Length: 5.93" (150.5mm) Head: 1.34" (34mm) Body: 1.10" (28mm)			
WEIGHT	7.58 oz. (215g) including battery			

- Max 280 lumen output from one included ARB-L21-2600Ex rechargeable li-ion battery
- Four lighting modes including three brightness levels and strobe
- Intrinsically safe for use in hazardous areas
- Specialized battery built specifically to withstand harsh environments









- ♦ AOD-M Diffuser Tip AOT-M Traffic Wand
- ♦ ALD-05 Helmet Mount



WT16R



	MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
봈	HIGH	300	3h 50min*	377ft (115m)	3200cd
SPOTLIGHT	MEDIUM	100	9h 20min	213ft (65m)	1070cd
SP [LOW	30	30h	115ft (35m)	320cd
붍	HIGH	300	3h 50min*	75ft (23m)	130cd
	LOW	100	9h 20min	46ft (14m)	50cd
FL00DLIGHT	YELLOW FLASH	10	-	-	-
	MPACT	withstands drops up to 1m			
WA	TERPROOF	IP66, dustproof/heavy splash, rainproof			
	SIZE	Length: 5" (127mm) Width: 1.46" (37mm) Height: 1.02" (26mm)			
1	WEIGHT	4.55 oz. (129g) including battery			

- ♦ Max 300 lumen output from the built-in 2000 mAh rechargeable li-polymer battery pack
- Six modes including three spotlight levels, two floodlight levels and a yellow flashing mode
- Strong magnets on the back and tail for attachment to most metal surfaces
- USB Type-C rechargeable with battery level indicator
















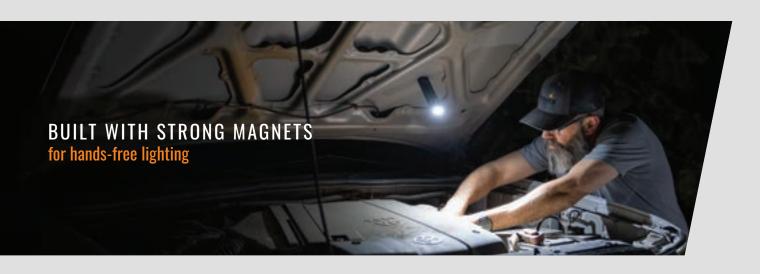



TURBO 1000 3h 40min3 722ft (220m) 11905cd HIGH 400 4h 50min 476ft (145m) 5186cd MEDIUM 150 11h 279ft (85m) 1877cd LOW 50 29h 164ft (50m) 672cd **STROBE** 1000 SOS 50 IMPACT withstands drops up to 1m **WATERPROOF** IP66, dustproof/heavy splash, rainproof SIZE Length: 5.33" (135.3mm) Head: 0.95" (24.1mm) Body: 1.16" (29.4mm) WEIGHT 4.83 oz. (137g) including battery

RUNTIME

DISTANCE

- Max 1000 lumen output from one included 18650 Li-ion rechargeable battery
- Six lighting modes including four brightness levels, strobe, and S.O.S.
- 105° adjustable head and magnetic tail
- Magnetic USB rechargeable



LUMENS

MODE











INTENSITY

- ARB-L18 Battery
- CR123A Battery



CL26R 400 LUMENS





MODE	LUMENS	RUNTIME	MAX DISTANCE
HIGH	400	5h	
MEDIUM	150	15h	
LOW	40	30h	
FRONT	25	58h	82ft (25m)
DOWN 1	3	240h	62II (23III)
DOWN 2	25	58h	
RED	1	200h	
RED FLASH	1	400h	
IMPACT	W	vithstands drops up to 1	m
WATERPROOF	IP66, du	ustproof/heavy splash, ra	ainproof
SIZE	Diameter:	1.9" (49mm) Height: 3.	8" (97mm)
WEIGHT	4.1 0	oz. (116g) excluding batt	eries











- Max 400 lumen output from one 18650 Li-ion battery or two CR123As
- Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- · Extremely durable case can withstand 1.2 tons of pressure
- IP66 rated rain resistant and dustproof

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- APB-20 Gear Bag
- ♦ APB-30 Gear Bag





CL30R 650 LUMENS



- Max 650 lumen output from up to three 18650 rechargeable Li-ion batteries
- Six modes including 5 brightness levels and flashing mode
- USB rechargeable with low battery indicator
- Serves as a portable power bank to charge other devices














- OPTIONAL ACCESSORIES
- ARB-L18 Battery
- CR123A Battery

MODE	LUMENS	RUN	TIME	DISTANCE		
MODE	LUMENS	2600mAh	3500mAh	DISTANCE		
TURB0	650	4h 30min	6h			
HIGH	350	9h	12h			
MEDIUM	100	38h	51h	115ft (35m)		
LOW	50	70h	93h	11311 (3311)		
EC0	10	10 300h 400h				
FLASH	100	70h	93h			
IMPACT		withstands dr	ops up to 1m			
WATERPROOF		IPX-7, waterproof	underwater to 1m			
SIZE	Heiç	ght: 5.4" (136mm)	Diameter: 3.7" (93	mm)		
WEIGHT		14.5 oz. (412g) e	excluding battery			

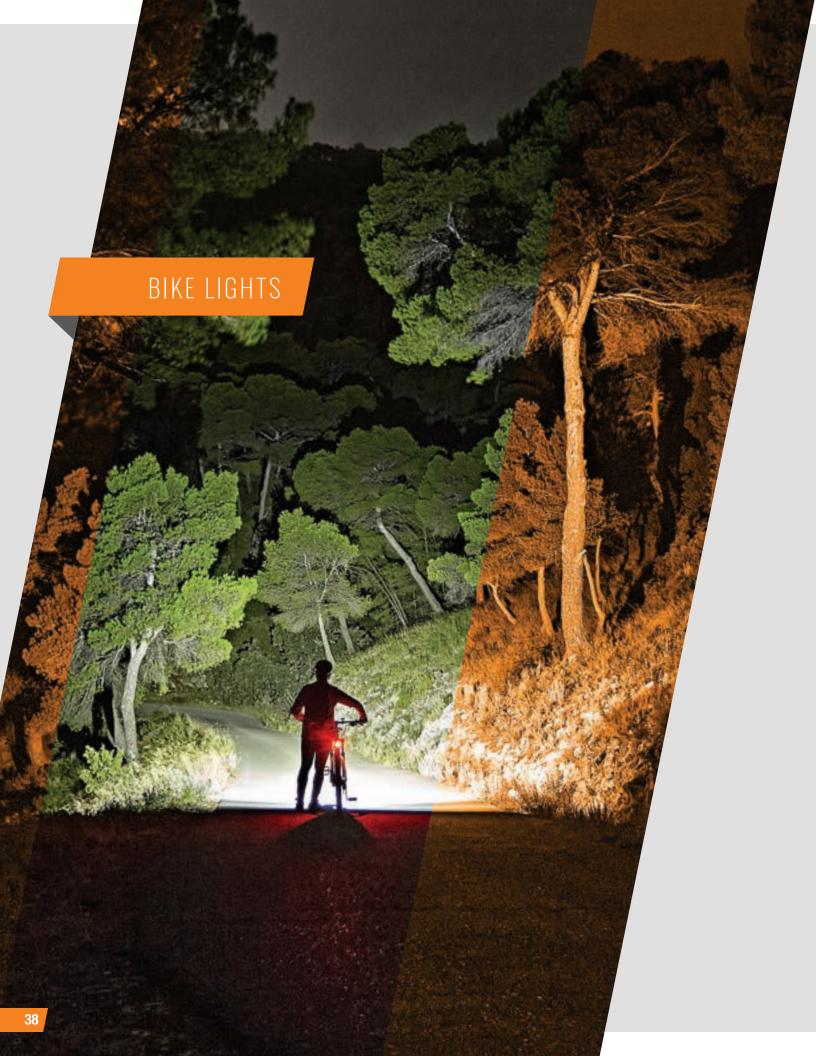

BC05R v2.0 15 LUMENS

IS LUMENS

MODE	LUMENS	RUNTIME	MAX DISTANCE	INTENSITY
HIGH FLASH (FAST)	15	35h		9cd
HIGH FLASH (SLOW)	15	25h		9cd
HIGH	15	4h 30min	164ft (50m)	9cd
LOW FLASH (FAST)	5	120h	164ft (50m)	3cd
LOW FLASH (SLOW)	5	80h		3cd
LOW	5	16h		3cd
IMPACT		withstands dro	ops up to 1.5m	
WATERPROOF	IF	P66, dustproof/hea	ıvy splash, rainprod	of
SIZE	Length: 2.01" (51mm) Width: 0.8	7" (22mm) Height	: 0.87" (22mm)
WEIGHT		0.99 oz. (28g) i	ncluding battery	

- Max 15 lumen output from built-in 400mAh Li-polymer battery
- Six modes including two brightness levels and four flashing modes
- USB Type-C rechargeable with battery level indicator
- Also use as a headlamp or backpack light

OPTIONAL ACCESSORIES ◆ APB-20 Gear Bag

















MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY				
TURB0	1200	2h 12min*	466ft (142m)	5082cd				
HIGH	400	6h 30min	262ft (80m) 1621cd					
MEDIUM	150	150 11h 161ft (49m)						
LOW	50	33h	92ft (28m)	206cd				
FLASH	400	_	_	_				
IMPACT		withstands dro	ops up to 1.5m					
WATERPROOF	IP68	, dustproof/submer	sible underwater to	2m				
SIZE	Length: 4.25" (116mm) Width: 1.0	06" (31mm) Height	: 1.14" (30mm)				
WEIGHT		5.54 oz. (157g) i	including battery					









OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- ♦ ALD-08 Helmet Mount
- ♦ ALD-10 GoPro Mount
- ♦ APB-30 Gear Bag
- Max 1200 lumen output from one included 18650 Li-ion battery or compatible with two CR123A lithium batteries
- Five modes including four brightness levels and flashing mode
- USB Type-C rechargeable with battery level indicator
- Quick-release bike mount
- Limited Lifetime Guarantee from Fenix Lighting USA



MODE	MAX LUMENS	RUNTIME	DISTANCE	INTENSITY
TURB0	600	2h	348ft (106m)	2816cd
HIGH	350	7h	259ft (79m)	1567cd
MEDIUM	150	15h	174ft (53m)	724cd
LOW	50	36h	105ft (32m)	265cd
FLASH	150	-	-	-
IMPACT		withstands dr	ops up to 1m	
WATERPROOF	ı	P66, dustproof/hea	vy splash, rainproo	f
SIZE	Length: 4.4"	(113mm) Width: 1.2	25" (32mm) Height:	1.2" (31mm)
WEIGHT	Weight: 5	i.5 oz. (155 grams)	including mount ar	ıd battery









OPTIONAL ACCESSORIES

- ♦ ALD-08 Helmet Mount
- ♦ ALD-10 GoPro Mount
- ♦ APB-30 Gear Bag
- Max 600 lumen output from the built-in 2600mAh Li-ion battery
- Five modes including four brightness levels and flashing mode
- · Cut-off facula line for safer commuting in traffic
- Micro-USB rechargeable with battery level indicator





MODE	LUMENS	RUNTIME	DISTANCE	INTENSITY
BURST	2200	30sec	614ft (187m)	8792cd
HIGH	1500	2h 18min	509ft (155m)	5913cd
MEDIUM	600	6h	315ft (96m)	2320cd
LOW	200	16h	184ft (56m)	780cd
EC0	50	50h	92ft (28m)	196cd
FLASH	600/50	_	_	_
IMPACT		withstands dr	ops up to 1m	
WATERPROOF	IP67	, dustproof/waterp	roof underwater to	1m
SIZE	Length: 4.7" (1	20mm) Width: 2.0'	' (50.5mm) Height:	1.3" (31.8mm)
WEIGHT	5.4	oz. (154g) excludi	ng battery and mo	unt







- Max 2200 lumen output from two removable 18650 Li-ion batteries or four CR123As (batteries not included)
- Six lighting modes including five brightness levels and flashing mode
- ♦ Smart wireless control switch
- Dual Distance Beam System

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- CR123A Battery
- ♦ ALD-08 Helmet Mount
- ♦ ALD-10 GoPro Mount
- APB-30 Gear Bag

BATTERIES & CHARGERS



Specifically designed for 18650 rechargeable batteries, these chargers feature a constant-current charge which safely extends the health and lifespan of the battery. Built for all types of batteries from 10440 up to 26650, AAA to AA. Automatically chooses the correct charging mode for each type of battery.

RECHARGEABLE BATTERIES

Fenix rechargeable batteries are designed for today's high-intensity flashlights. Featuring a large capacity, triple over-heat protection, built-in over-charge protection and other safety features, these batteries from Fenix are your best choice for powering your Fenix light.



MODEL	ТҮРЕ	CAPACITY	VOLTAGE
ARB-L14-1600U	14500 with USB Port	1600 mAh	1.5v
ARB-L16-700UP	16340 with USB Port	700 mAh	3.6v
ARB-L16-800UP	16340 with USBC Port	800 mAh	3.6v
ARB-L18-2600	18650	2600 mAh	3.6v
ARB-L18-2600U	18650 with USB Port	2600 mAh	3.6v
ARB-L18-3000P	18650	3000 mAh	3.6v
ARB-L18-3400	18650	3400 mAh	3.6v
ARB-L18-3400U	18650 with USB Port	3400 mAh	3.6v
ARB-L18-3500	18650	3500 mAh	3.6v
ARB-L18-3500U	18650 with USB Port	3500 mAh	3.6v
ARB-L21-4000P	21700	4000 mAh	3.6v
ARB-L21-5000	21700	5000 mAh	3.6v
ARB-L21-5000U	21700 with USB Port	5000 mAh	3.6v

ACCESSORIES

BATTERY HOLDER	BIKE MOUNT	DIFFUSER TIPS
ALF-18 Allows you to use an 18650 battery in flashlights that are built to use a 21700 battery. Simply insert your 18650 battery into the holder and place both into your 21700 capable flashlight.	ALB-10 Take Fenix flashlights on the road and trail with this fully-adjustable mount. Capable of holding small to mid-sized lights, this mount can be moved from bike to bike without using tools.	AOD Transform your Fenix light into a reading, signal or emergency light. Attachment is quick and secure with materials designed for field use.

FILTER ADAPTERS

GEAR BAG

HEADBAND









Paris

AOF

Improve night-time visibility and avoid detection with these colored filters. Durable with an anti-roll design, they improve map reading, navigation and tracking.

APB-20/APB-30

Ultra-compact headlamp gear bags made of highstrength nylon cloth. Perfect for headlamps, small flashlights and extra batteries

AFH SERIES

Replacement headband for your headlamp.
Its perforated material reduces weight and creates
a more comfortable wear.

HELMET MOUNTS/CLIPS

HOLSTERS

RAIL/BARREL MOUNTS



ALD SERIES

Quickly attach and detach headlamps or flashlights to any outdoor or work helmet—making sure the light stays securely fixed to your helmet.





ALP-10/ALP-20 ALG

Made from hot-pressed nylon or leather, these holsters are built to last. The flashlight sits firmly within the holster and will not jostle around when running.



ALG SERIES

Mount your flashlight to a weapon rail or barrel with these anodized aluminum mounts. Ensure positive engagement with a matte black finish for a professional appearance.

REMOTE SWITCHES

PRESSURE SWITCH MOUNT

TACTICAL RING



AER SERIES

Operate your flashlight remotely thanks to this remote switching system. Perfect for use in tactical situations when mounted in conjunction with a rail mount.



ALG-05/ALG-06

These mounts are designed to hold the Fenix AER series tactical remote pressure switches control pad to your weapon. Made of aluminum alloy with hard-anodized finish.




ALR-01

Deploy and hold your flashlight confidently in any tactical situation. Designed to fit most of Fenix's best-selling tactical flashlights with a tight and secure fit

TRAFFIC WAND

UNIVERSAL MOUNT

WRIST MOUNT



AOT

Point the way to safety with this click-and-go accessory from Fenix. Long-distance visibility improves as does close-in traffic management.



ВІОВКМТ

Perfect tool for any flashlight owner who needs to attach their flashlight to a tent, camper, bicycle, tree—just about anywhere where hands-free light is needed.



ALW

This mount is a unique way to allow your flashlight to be used hands free. Simply attach the flashlight to the mount and wrap the strap to your wrist.

ACCESSORY COMPATIBILITY CHART

	DIFFUS	SER TIP	FILT ADAI	TER Pter		TRAFFIC	C WAND			RAIL N	//OUNT			REM	OTE SW	ITCH			HOLSTER		TAC RING	BIKE MOUNT	WRIST MOUNT	HELMET MOUNT
MODEL	AOD-S												AER-02	AER-03			AER-	ALP-	ALP-					
C SERIES	V2.0	AOD-M	AUFS+	AUFL	AUI-S+	AOT-M	AUI-L	A0T-02	ALG-00	ALG-15	ALG-16	ALG-18	V2.0	V2.0	AEK-U4	AER-05	06s	108	10L	ALP-20	ALK-U1	ALB-10	ALW-01	ALD-05
C7				~			~	V	~	~	~	~								~		~		~
E SERIES																								
E-CP									~			~												~
E-LITE E-SPARK																								
E-STAR																								
E01 V2.0																								
E02R																								
E03R V2.0 E05R																								
E09R																								_
E12 V2.0																						~	V	~
E18R V2.0																						~	~	~
E20 V2.0																						~	~	~
E28R V2.0	~								<i>V</i>	~	~	~										<i>V</i>	<i>V</i>	~
E35R GL SERIES	~								~	· ·	· ·	· ·										~	~	~
GL06																								
GL19R																	~							
GL22																								
HT SERIES																								
HT18R HT30R							~	~	~	~	~	~			~	~				~	V	~		~
HT32									~	~	~	~				V*				~		~		_
LD SERIES																								
LD12R																						~		~
LD15R																								
LD22 V2.0 LD30	V		~						~	~												V		<i>V</i>
LD30R	~		~		~				~	~	V	~						~				~	~	V
LR SERIES																								
LR35R																								
LR40R V2.0																								
LR50R																								
LR60R LR80R																								
PD SERIES																								
PD25R	~																					~	V	~
PD32 V2.0	~		~		~				~	~	~	~	~					~				~	~	~
PD35 V3.0	~		<i>'</i>		<i>'</i>				~	<i>'</i>	~	<i>'</i>	<i>V</i>					~				~	<i>V</i>	~
PD35R PD36R V2.0	V		~		V				V	V	V	V	~						~	~		V	~	V V
PD36R PRO	~				~				~	~	~	~			~	~			~	~	~	~		~
PD36R TAC	~				~				~	~	~	~			~	~			~		~	~		~
PD40R V3.0		~							~	~	~	~							V	~		~		V
TK SERIES																								
TK11R TK16 V2.0		V				V			V	V	<i>y</i>	V	~						V	~		V		V V
TK20R V2.0		<i>v</i>				~			~	~	V	~			~	V				<i>V</i>	V	~		~
TK20R UE		~				~			~	~	~	~			~	~				~	~	~		~
TK22 TAC		~		~			~	~	~	~	~	~			~	~					~	~		~
TK22R		'		~			~	<i>\(\begin{array}{c} \\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ </i>	~	~	~	~			~	~				~	~	~		~
TK26R		~		~			~	~	V	<i>V</i>	<i>V</i>	<i>V</i>		~							.,	~		<i>V</i>
TK30 TK35UE V2.0									~	~	~	~			~					~	~			~
WF SERIES																								
WF05E																								
WF11E																								
WF26R		~		~			~		~	~	~	~								~	~	~		~
WF30RE WT SERIES		~				V																		~
WT16R																								
WT25R																								
*\//hito light or				_							_	_												

^{*}White light only

BATTERY COMPATIBILITY CHART

					LITHIUM	BATTERY HOLDER
					DALICKÍ	HOLDER
MODEL	ARB-L14 14500	ARB-L16 16340	ARB-L18 18650	ARB-L21 21700	CR123A	ALF-18
C SERIES	14000	10010	10000	21700	OHILOR	ALI IO
C7			√ ∗	V		~
E SERIES						
E-CP						
E-LITE						
E-SPARK						
E-STAR						
E01 V2.0						
E02R						
E03R V2.0						
E05R						
E09R						
E12 V2.0						
E18R V2.0		~			~	
E20 V2.0						
E28R V2.0			V		V	
E35R GL SERIES			√ ∗	~	√ ∗	~
GL SERIES GL06		.,,				
GL06 GL19R		~			-	
GL19h						
HT SERIES						
HT18R			v *	V	√ ∗	V
HT30R			V*	~	V*	~
HT32			V ∗	· ·	V*	~
LD SERIES					•	
LD12R	~					
LD15R	-	~			~	
LD22 V2.0						
LD30			~		~	
LD30R			~		~	
LR SERIES						
LR35R			√ ∗	~	✓ *°	~
LR40R V2.0						
LR50R			✓*	~		~
LR60R						
LR80R						
PD SERIES						
PD25R		~			~	
PD32 V2.0			~		~	
PD35 V3.0			~		~	
PD35R			'		✓°	
PD36R V2.0			V *	V	/ *	~
PD36R PRO			V *	V	V ∗	<i>V</i>
PD36R TAC			V*	V	V*	V
PD40R V3.0			√ *0	~	√ *°	~
			.,			
TK11R TK16 V2.0			✓ ✓*	.,,	✓ ✓*	
TK20R V2.0			V* V*	V V	V*	V
TK22 TAC			V*	~	V*	~
TK22R			V*	~	V*	~
TK26R			~	_	~	-
TK30			V*	~	V*	~
TK35UE V2.0			~	<u> </u>	~	-
WF SERIES						
WF05E						
WF11E						
WF26R			√ *	~	√ *	V
WF30RE						
WT SERIES						
WT16R						
WT25R			~		V	

					LITHIUM BATTERY	BATTERY HOLDER	HELMET	MOUNT	HELMET CLIPS	GOPRO MOUNT	GEAR	BAG
MODEL	ARB-L14 14500	ARB-L16 16340	ARB-L18 18650	ARB-L21 21700	CR123A	ALF-18	ALG-03 V2.0	ALD-08	ALD-02	ALD-10	APB-20	APB-30
HEADLAMPS												
HL16											~	~
HL18R-T											~	~
HM23	~								~		~	~
HL32R-T											~	~
HM50R V2.0		~			√ ∘				~		~	~
HM60R			~		~		~		~		~	~
HM61R V2.0			~		~		~		~		~	~
HM65R			~		~		~		~		~	~
HM65R-T			~		~						~	~
HM65R-DT			~		~						~	~
HM70R			✓ *	~	√ ∗	~	~		~		~	~
HM71R			✓ *	~	√ *	~	~		~		~	~
HP16R									~			~
HP25R V2.0			✓ *	~	✓ *	~			~			~
HP30R V2.0			✓ *	~		~	~		~			~
WH23R							~		~		~	~
LANTERNS												
CL20R											~	~
CL26R			~		√ ∘						~	~
CL26R PRO				~								~
CL28R												~
CL30R			~		~							
BIKE LIGHTS												
BC05R											~	~
BC15R								~		~		~
BC21R V3.0			~		~			~		~		~
BC25R								~		~		~
BC26R			✓ *	~	√ ∗	~		~		~		V
BC30 V2.0			~		~			~		~		V
BC30R								~		~		~


*when used with the ALF-18 Battery Holder

°Some levels/modes are not available



THE FENIX CONSTRUCTION

Fenix prides itself in keeping up with the latest lighting technologies and build techniques. Fenix lights will always be the most innovative, brightest and toughest lights on the market.

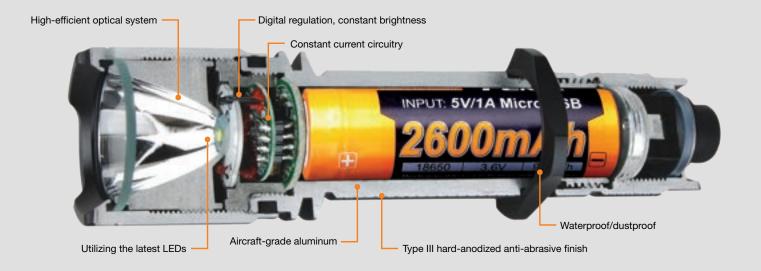

THE FENIX PROTOCOL® GOES BEYOND

By adding up to eight extra testing steps, the FENIX PROTOCOL puts devices in situations that more closely mirror the flashlight users' reality through a) shakeout, b) bending, c) salty spray, d) ultraviolet radiation, e) environmental, f) vibration, g) switch and h) temperature testing.









SHAKEOUT TEST

evaluates the scratch and wear resistance of the flashlight's surface



BENDING TEST

challenges the bending degree and inherent strength of internal wiring systems



SALTY SPRAY TEST

puts the light into corrosionprovoking conditions beyond what most will ever face



ULTRAVIOLET RADIATION TEST

monitors the light's performance after intense exposure to **UV** radiation



ENVIRONMENTAL TEST

pushes low and high temperature ranges to verify performance at extremes

VIBRATION TEST

jars the light over thousands of cycles to validate resistance to rigorous forces

SWITCH TEST

checks switch function well over the projected lifespan of the light

TEMPERATURE TEST

determines heat generation and dissipation of Fenix' powerful LED systems

ANSI STANDARDS = BETTER FLASHLIGHT PERFORMANCE

ANSI package symbols make it easier to buy with confidence. Six baseline tests allow flashlight users to compare essential performance attributes. While not a comprehensive evaluation of individual lights, ANSI FL-1 Standards are the start of intelligent buying.



measures total quantity of light energy = how BRIGHT it appears. Three samples are tested with fresh batteries for output measured



PEAK BEAM INTENSITY

measures the brightest point = how STRONG the light is. Lux levels at 2, 10 or 30 meters are taken within the first 2 min of operation



measures hours to 10% brightness = how LONG batteries last. Fresh batteries are run at the light's maximum brightness level and



IMPACT RESISTANCE

checks function when dropped = how HIGH a drop it can take. Six drops are made at different angles starting at one meter



BEAM DISTANCE measures where the light diminishes = how FAR the light shines. Rated distance – in meters – is where a luxmeter detects 0.25 lux



WATER RESISTANCE

checks the light's dependability = how RESISTANT it is to water. Splashing, temporary or total immersion are tested immediately after 30 minutes of exposure



CUSTOMER SERVICE/ORDERS

HOURS OF OPERATION 9:00 am to 5:00 pm CST Toll Free: 888-775-9996

Fax: 888-775-9991

Email: orders@fenixlighting.com

FENIX LIGHTING U.S. HEADQUARTERS

BILLING ADDRESS 10488 W. Centennial Rd. #301 Littleton CO 80127

SERVICE REPAIR CENTER & WAREHOUSE LOCATION

161 Market Street Monticello, AR 71655

MERCHANDISE RETURNS

Merchandise may not be returned without the prior approval of Fenix Lighting U.S. Please contact customer service with any inquires you have on product that was shipped in error or is found to be defective in workmanship and quality. If a customer returns product to same retailer of purchase, then the retailer has the ability to satisfy their consumer directly or refer to our customer service department. In the event the retailer exchanges product to satisfy the consumer, then the retailer may return the faulty product exchanged by consumer for credit or equal replacement product by contacting customer service.

REPAIR POLICY

If your Fenix product has a manufacturer's defect covered by our warranty, we will either repair or replace it, at our option, without charge. Return it to your place of purchase or send it to the Service Repair Center address. Please include your 1) name, 2) address, 3) phone number and 4) email address (optional) with the product.

Most damaged Fenix products not covered by the warranty can still be repaired. If repair costs and handling charges apply, you will be notified prior to any service. Please send to the Service Repair Center address. Include your 1) name, 2) address, 3) phone number and 4) e-mail address (optional) with the product. Do not send to the Headquarters address.

All warranty repairs or replacements are at the sole discretion of the Fenix Lighting U.S. Authorized Repair Center and we reserve the right to refuse a request for any reason.

LIFETIME LIMITED WARRANTY

Fenix Lighting U.S., guarantees all Fenix products purchased from retailers directly supported by them to be made of first-class materials and therefore provides a lifetime warranty against any defects in material and workmanship.

Excluded from warranty coverage is any damage to the exterior deemed reasonable wear and tear such as scratches and/or fading of color. In addition, the warranty does not apply to damage caused by abnormal or unreasonable use of any of the components. This includes use of unapproved batteries in Fenix products (see user manuals). This warranty is in place of all other warranties, including warranty of fitness for a particular purpose and warranty of merchantability and excludes any liability for incidental or consequential damages.

LIMITATION OF LIABILITY

The liability of Fenix Lighting U.S. in regards to the sale and delivery of goods according to the invoice is limited to repair and replacement of, or credit for, defective goods, at the option of Fenix Lighting U.S. Under no circumstances shall Fenix Lighting U.S. be liable for economic loss or for any other special, indirect, incidental or consequential damages, of any kind suffered by purchaser.

FENIX LIGHTING U.S. PROMISE

We promise to support you (the retailer) and your consumers to deliver the highest level of satisfaction. That means taking responsibility for promptly solving product, service or warranty problems. If, as a retail partner, you are not satisfied with the service you have received at any time, then please contact us directly at customerservice@fenixlighting. com. The goal remains your satisfaction—and success—as a key member of the Fenix Lighting U.S. retail network.

^{*} The runtime of this mode is the accumulated time without time-limited downshifting and overheat protection.







CUSTOMER SERVICE (888) 775-9996 (9:00 am-5:00 pm CST) orders@fenixlighting.com FENIX LIGHTING US HEADQUARTERS 10488 W. Centennial Rd. #301 Littleton, CO 80127 © Fenix Lighting US
Specifications subject to change
without notice.