



# LEARN MORE ABOUT + OUR PRODUCTS



[www.peli.com](http://www.peli.com)



AVAILABLE IN 18 LANGUAGES!

[www.pelicatalogue.com](http://www.pelicatalogue.com)



[www.peli.com/webinars](http://www.peli.com/webinars)



## EMEAI / [www.peli.com](http://www.peli.com)

**EUROPE, MIDDLE EAST & AFRICA HEADQUARTERS**  
PELI PRODUCTS, S.L.U.  
C/ Provença, 388 Planta 7  
08025 • Barcelona, Spain  
Tel +34 934 674 999

**FRANCE**  
PELI PRODUCTS FRANCE S.A.S.  
20/22 Rue des Petits Hôtels  
75010 Paris, France  
Tel +33 (0)1 44 83 95 63

**UK**  
PELI HARDIGG UK  
Unit 4, Brookfield Industrial Estate  
Leacon Road  
Ashford Kent TN23 4TU  
Tel + 44 (0) 1233 895 895

**GERMANY**  
PELI PRODUCTS GERMANY GmbH  
Neudorfer Strasse 285 C  
09474 Crottendorf  
Germany  
Tel +49 (0) 211 882 42 401

**DENMARK**  
PELI PRODUCTS DENMARK APS  
Midtermolen 1, 2. tv.  
2100 Copenhagen, Denmark  
Tel: +34 934 674 999

**NETHERLANDS**  
PELI PRODUCTS NETHERLANDS B.V.  
Basisweg, 10  
1043AP Amsterdam,  
The Netherlands  
Tel +34 934 674 999

**ITALY**  
PELI PRODUCTS ITALY S.R.L.  
Viale Monte Nero, 84  
20135 Milano, Italy  
Tel +34 934 674 999

**POLAND**  
PELI PRODUCTS POLAND SP. Z O.O.  
ul. Stary Rynek 38-39  
61-772 Poznan, Poland  
Tel +34 934 674 999

**UAE**  
PELICAN PRODUCTS FZE  
JAFZA One Building A  
office 1511/1512  
Jebel Ali Free Zone gate 5  
P.O.Box 261008  
Dubai – United Arab Emirates  
Tel +971 4 8876550

**INDIA**  
PELICAN PRODUCTS AND  
SERVICES INDIA PVT. LTD  
Level "4", Augusta Point,  
Sector-53,  
Golf Course Road,  
Gurgaon 122002 Haryana, India  
Tel +91 124 4354148

## U.S.A.

**U.S.A. & GLOBAL HEADQUARTERS**  
23215 Early Avenue  
Torrance, CA 90505 USA  
Tel 310.326.4700  
800.473.5422 (Outside CA)

\* We also have offices in Canada, Japan, China, Australia and South Korea

### PELI 1 YEAR LIMITED WARRANTY FOR ROTO MOULDED CONTAINERS

Peli Products S.L.U. warrants to the original purchaser of its rotationally moulded containers that its containers will be free of defects in materials and workmanship for a period of one year from the date of invoice. Such warranty does not cover any associated hardware including closure hardware, retractable handles, wheels, and fasteners, which Peli warrants against defects in materials and workmanship for a period of 90 days from the invoice date. To the extent permitted by law, Peli's liability is limited to the case and not its contents or foam. All warranty claims of any nature are barred if the container has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Refer to [www.peli.com](http://www.peli.com) for full details.

### Distributed by:

Follow us on: PELInsights subscribe now!



©2024 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its parent, subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit [www.peli.com](http://www.peli.com) and [www.pelicatalogue.com](http://www.pelicatalogue.com).  
Part No. 0030-MRB-001E FEB 24

### PELInsights



Check out our latest posts on Peli Rack Cases, get to know our Pro Users and take part in our different programs.

This and more on the brand new PELI blog!




### Watch our Rack Cases video!



PELI-HARDIGG™  
MINI MAC RACK™ CONTAINERS  
BROCHURE  
FEBRUARY 2024



SINCE 1976

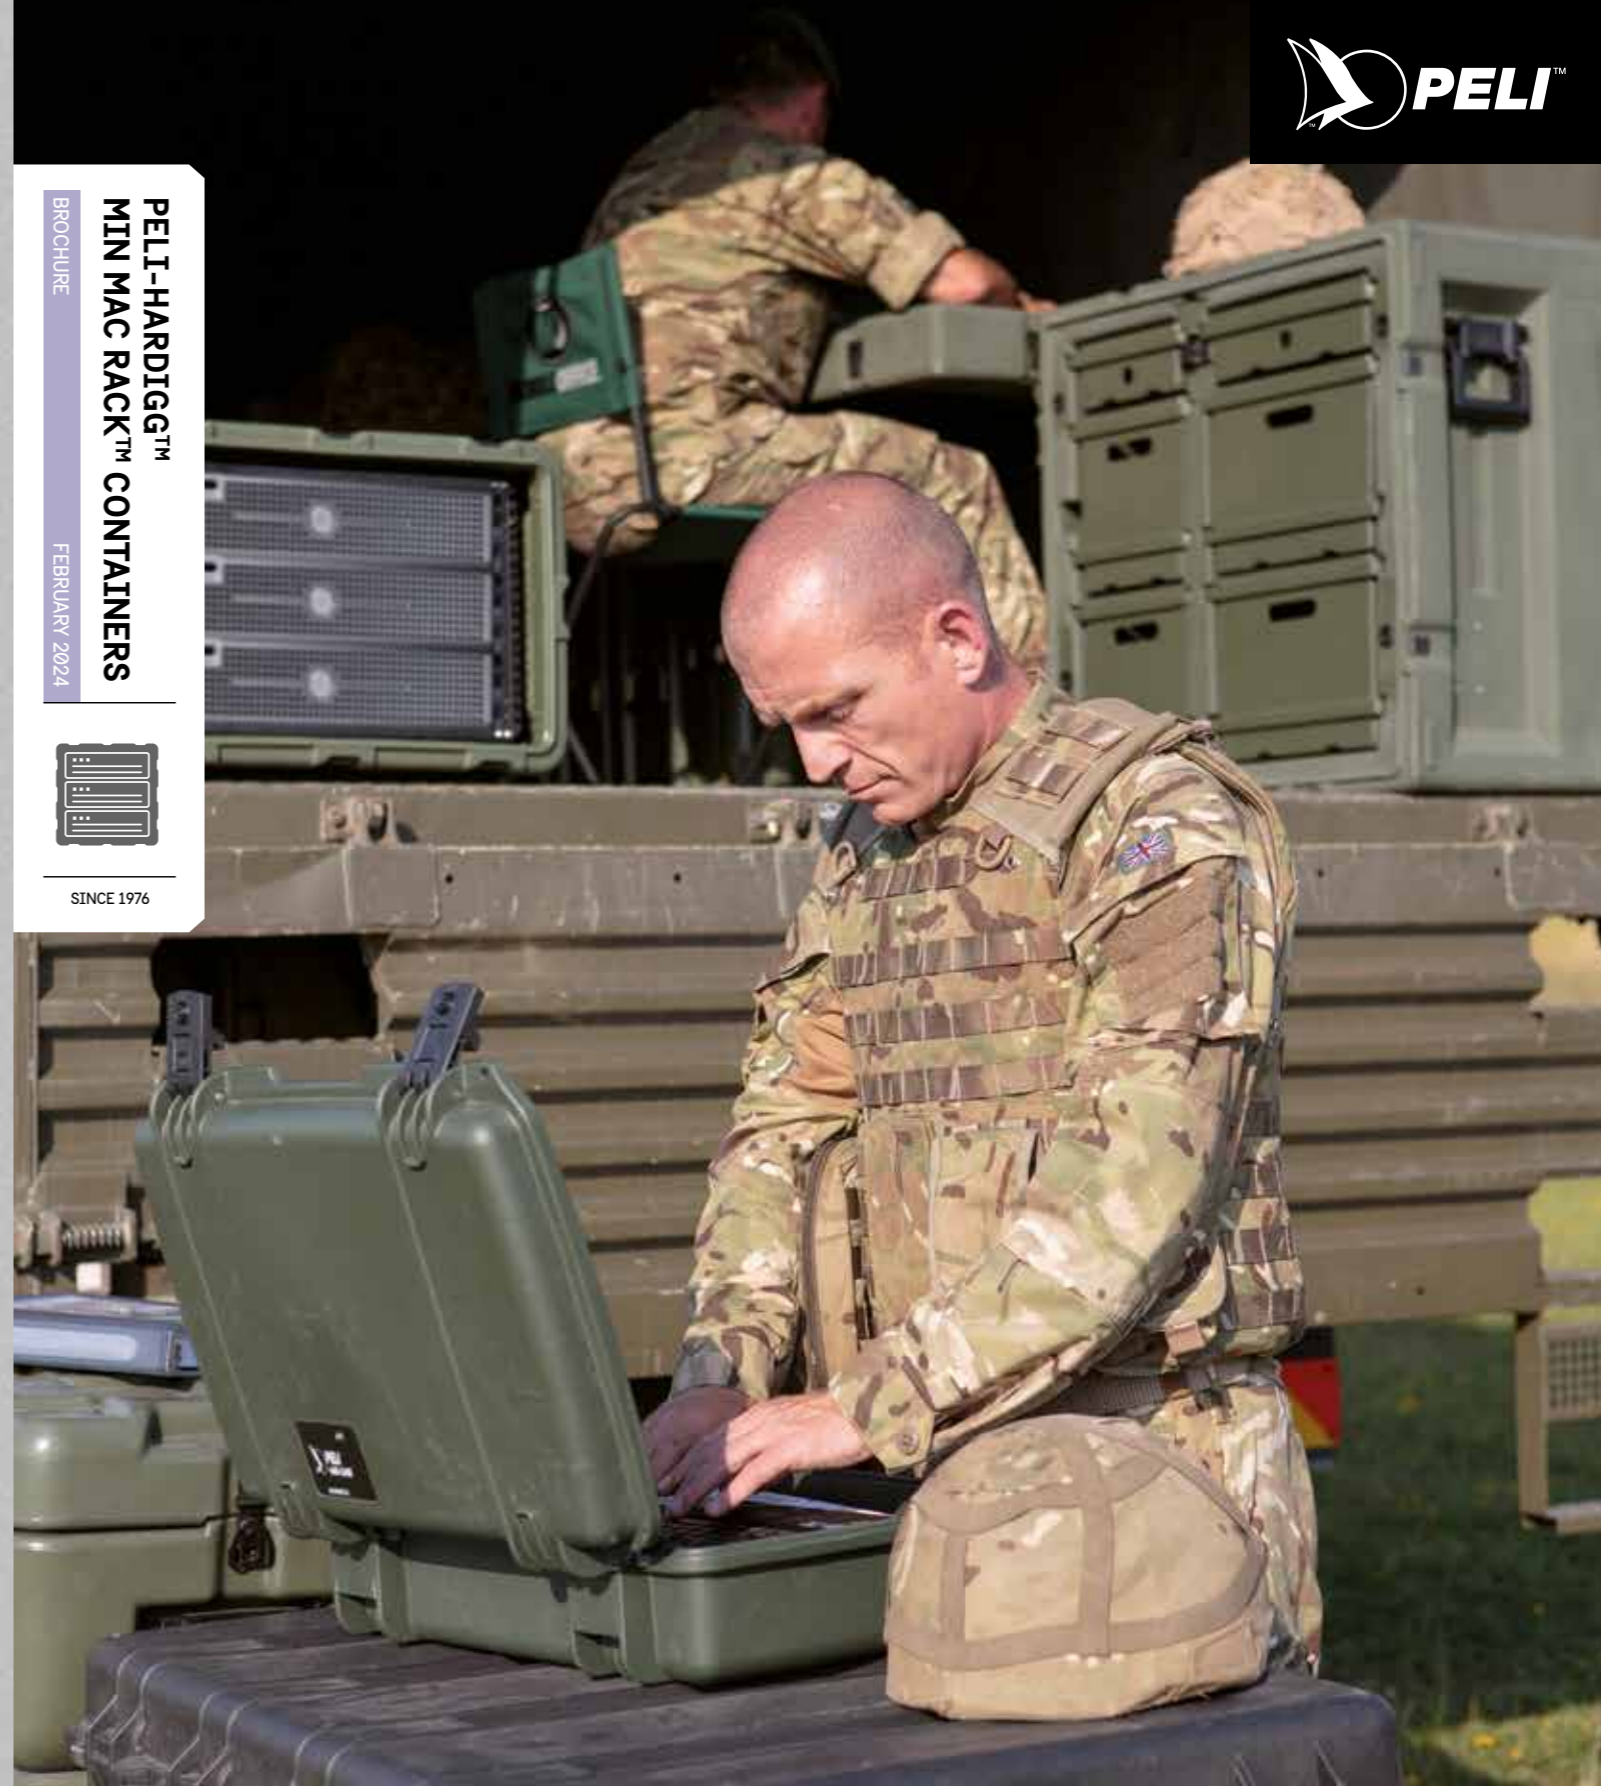

## SUPERIOR COMPACT MOBILITY FOR RACK MOUNTABLE EQUIPMENT

MADE IN GERMANY



The lightweight, compact design of the Min Mac Rack™ double ended cases, offer light to medium duty protection and boast industry leading shock performance. It's angled precision-engineered elastomeric shock mounts are fine-tuned to match the weight and fragility of your equipment, ensuring maximum shock and vibration isolation. High strength, lightweight, heat treated, square holed steel rack frame provides a range of mounting options for single or multiple fragile equipment, IT, Comms, test equipment and ground controllers.

If you are trying to make the most of limited space, but still require a rugged protection for your equipment, Min Mac Rack™ is the answer.

Designed to meet the requirements of Def Stan 81-41 Level J, Mil Standard 810, STANAG 4340 and other European standards.

## MIN MAC RACK™ FOR DEPLOYED EQUIPMENT



### FEATURES


- Lightweight, compact, and inter-stackable.
- Shock mounts protect equipment from shock and vibration.
- High-strength steel rack frame supports equipment from 10-50 kg.
- Patented, wide-design, Comfort Grip Handles™ come as a standard option.
- 10 different models, frame heights 4-12U in two depths, 480 and 610mm.
- Variety of accessories and options.
- Manufactured in Europe.
- Edge casters standard in deep lids.

### TYPICAL APPLICATIONS INCLUDE

- Rack mountable precision test equipment.
- Electro-mechanical.
- Medical and biological diagnostic equipment, memory storage devices.
- Meteorological instruments.
- Mobile operations.
- Broadcast and video gear.
- Laboratory equipment.
- Aerospace instrumentation.
- Servers, military mission planning.
- Command and control equipment.
- Flight simulators.

### OPTIONS INCLUDE

- Lift rings/tie down rings.
- Padlock hasp.
- Interlocking plates.

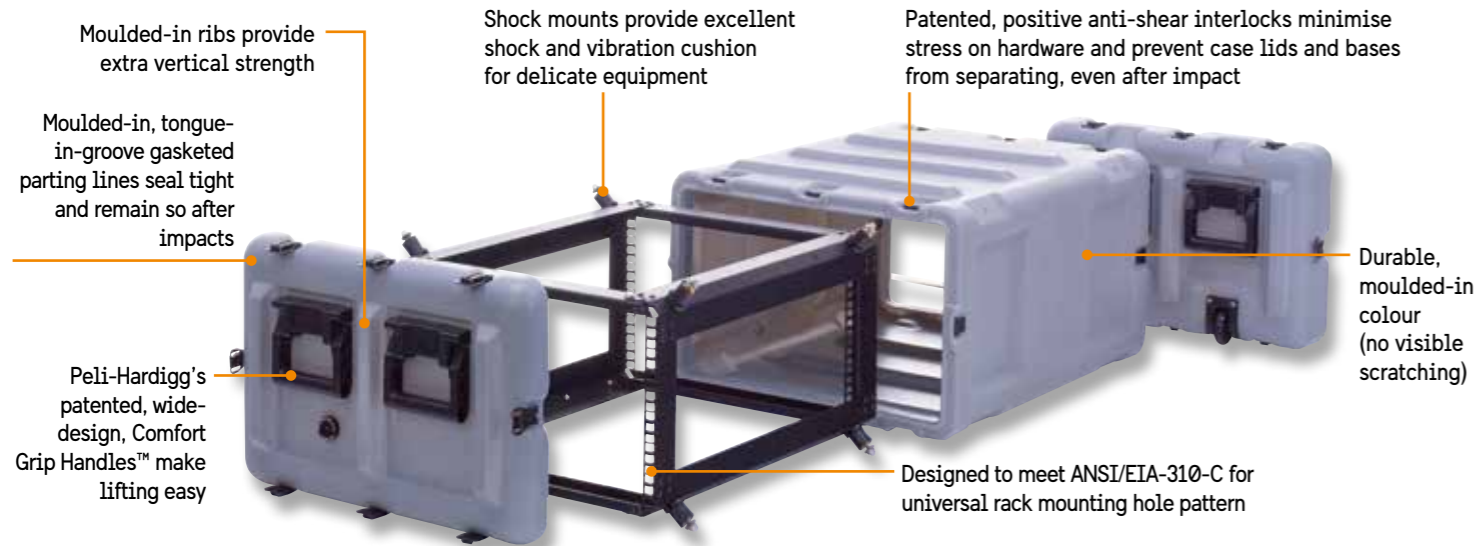

### STANDARD COLOURS

Gray – 133 Fed Std# 26270	Tan – 250 Fed Std# 20372	Blue – 135(lt) Pantone# 292U	White – 132 Fed Std# 27925	Yellow – 136 Pantone# 012U	Green – 138 (forest) Fed Std# 24052	Orange – 134 Fed Std# 12197
Yellow – 131 Fed Std# 23538	Maroon – 197 Pantone# 202U	Blue – 101(dk) Fed Std# 25052	Black – 032 Fed Std# 27040	Red – 130 Fed Std# 21105	Olive Drab – 137 Fed Std# 34096	Purple – 129 Pantone# 245U

Note: Some options are not available on all case sizes and availability is subject to change at manufacturer's discretion. Case colours/options may differ slightly from printed versions.

MIN MAC RACK™ PART NUMBER	RACK HEIGHT U-SIZE		RACK LENGTH mm	RACK WIDTH mm		LID I.D. FRONT/ BACK	LID O.D. FRONT/ BACK	CASE LENGTH O.D.*	CASE WIDTH O.D.	CASE HEIGHT O.D.	WEIGHT kg
	U	mm		inches	mm						
MR4U 40/480/40	4U	178	480	19	483	45/45	80/80	740	555	285	17,2
MR4U 40/480/100						45/85	80/125	785			17,6
MR4U 40/610/40	4U	178	610	19	483	45/45	80/80	870	555	285	19,0
MR4U 40/610/100						45/85	80/125	915			19,4
MR6U 40/480/40	6U	267	480	19	483	45/45	80/80	740	555	375	19,3
MR6U 40/480/100						45/85	80/125	785			19,8
MR6U 40/610/40	6U	267	610	19	483	45/45	80/80	870	555	375	20,9
MR6U 40/610/100						45/85	80/125	915			21,4
MR8U 40/480/40	8U	355	480	19	483	45/45	80/80	740	555	460	22,8
MR8U 40/480/100						45/85	80/125	785			23,5
MR8U 40/610/40	8U	355	610	19	483	45/45	80/80	870	555	460	24,8
MR8U 40/610/100						45/85	80/125	915			25,5
MR10U 40/480/40	10U	443	480	19	483	45/45	80/80	740	555	550	26,1
MR10U 40/480/100						45/85	80/125	785			26,8
MR10U 40/610/40	10U	443	610	19	483	45/45	80/80	870	555	550	28,2
MR10U 40/610/100						45/85	80/125	915			29,0
MR12U 40/480/40	12U	533	480	19	483	45/45	80/80	740	555	640	29,2
MR12U 40/480/100						45/85	80/125	785			30,0
MR12U 40/610/40	12U	533	610	19	483	45/45	80/80	870	555	640	31,7
MR12U 40/610/100						45/85	80/125	915			32,5

\*Length Outside Dimension includes both Lids.

Please note all weights are approximate, and may vary. These weights have been calculated.