

2025

STORM CASE CATALOGUE



STORM CASES

Rugged, uncompromising and trusted, Peli cases protect what matters to you, from the everyday to the extraordinary. Peli Storm Case™ is a rugged range of IP67 certified, injection moulded cases that are built to the highest standards. Made of high-performance, lightweight HPX™ resin, these impact resistant cases are extremely durable even at low temperatures. Regardless of the size or shape, there is a Peli Storm case for every kind of sensitive equipment.

FEATURES

4-5

PRODUCTS

6-15

Small Cases

6

Medium Cases

8

Laptop Cases

11

Large Cases

12

Long Cases

14

SPECIFICATIONS

16-19

ACCESSORIES

20-27

Base Protection

20

Lid Protection

22

Other Accessories

24

Special Applications

26



408.9
16.10

STORM CASES



MADE OF HPX RESIN

The high-performance resin makes these cases impact resistant even at low temperatures and a lightweight alternative to Protector cases of a similar size.

PRESS & PULL LATCHES

These smooth-opening, patented latches hold tight under pressure and impact with easy-opening performance. Tested to over 180 kg (400lbs.), yet open with a simple release button.

DOUBLE-LAYER SOFT-GRIP HANDLES

When the weather goes south you'll find a secure grip that won't slip. An in-tool vulcanizing process over-moulds the grips to the polymer handle for a lifetime of dependable performance.

VORTEX PRESSURE RELEASE VALVE

The built-in technology of Peli Storm Cases automatic pressure equalisation valve is also a patented feature. During air travel it prevents vacuum lock to make opening the case natural, even after extreme altitude changes. At the same time, the microscopic filter blocks water molecules and dust particles so your gear stays clean in the Gobi Desert and dry on the Nile River.

WATERTIGHT

The secret is the tongue and groove fit with a polymer o-ring which creates a watertight seal that gives each case its IP67 waterproof rating. Made from neoprene, these gaskets fit securely into a groove in the case lid, ensuring a tight seal when latched.

ALLOY PIN

Peli Storm cases contain alloy pins to avoid corrosion.



* Lifetime guarantee not applicable where prohibited by law.

SMALL CASES

Perfect for small gear and instruments with all the features found in larger cases: strong HPX™ resin construction, Vortex™ valve, and Press & Pull™ latches.



Note that the dimensions of some cases manufactured in Germany differ slightly from the equivalent cases manufactured in the US. Please review the case dimensions carefully before initiating any project.

SEE ALL



Dustproof and waterproof up to depths of 1 meter for thirty minutes.



The Press & Pull latch is a unique latch that locks automatically, but opens with a light touch.



iM2050



INTERNAL DIMS:
24.1 x 19.1 x 10.8 cm
(9.50" x 7.50" x 4.25")

EXTERNAL DIMS:
30 x 24.9 x 11.9 cm
(11.80" x 9.80" x 4.70")

LID/BOTTOM DEPTH:
3.8 cm / 7 cm
(1.50" / 2.75")

WEIGHT:
1.36 kg (3 lbs) WITH FOAM
1.22 kg (2.7 lbs) NO FOAM



iM2075



INTERNAL DIMS:
24.1 x 19.1 x 18.4 cm
(9.50" x 7.50" x 7.25")

EXTERNAL DIMS:
30 x 24.9 x 19.6 cm
(11.80" x 9.80" x 7.70")

LID/BOTTOM DEPTH:
3.8 cm / 14.6 cm
(1.50" / 5.75")

WEIGHT:
1.68 kg (3.7 lbs) WITH FOAM
1.5 kg (3.3 lbs) NO FOAM



iM2100



INTERNAL DIMS:
33 x 23.4 x 15.2 cm
(13.00" x 9.20" x 6.00")

EXTERNAL DIMS:
36.1 x 29 x 16.5 cm
(14.20" x 11.40" x 6.50")

LID/BOTTOM DEPTH:
5.1 cm / 10.2 cm
(2.00" / 4.00")

WEIGHT:
2.22 kg (4.9 lbs) WITH FOAM
1.91 kg (4.2 lbs) NO FOAM



*These colours are available upon minimum quantities, as well as other configurations. Check with your Customer Service representative for further details.

LARGE CASES

In the lab or out in the field, a large Peli™ Storm Case™ with HPX™ resin construction stores and protects valuable and sensitive equipment from the elements. Pick N Pluck™ foam adds extra protection from shock during transport.



Note that the dimensions of some cases manufactured in Germany differ slightly from the equivalent cases manufactured in the US. Please review the case dimensions carefully before initiating any project.

SEE ALL



Dustproof and waterproof up to depths of 1 meter for thirty minutes.



The Press & Pull latch is a unique latch that locks automatically, but opens with a light touch.



Quiet rolling stainless-steel bearing wheels.

iM2700

iM2720

iM2750

iM2875

iM2950

iM2975

iM3075



See case on page 9

*These colours are available upon minimum quantities, as well as other configurations. Check with your Customer Service representative for further details.

CASE CONTENTS NOT INCLUDED

CASES SPECIFICATIONS

SMALL CASES

CAT. NO.	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	LID DEPTH	BOTTOM DEPTH	WEIGHT WITH FOAM	WEIGHT WITHOUT FOAM	BUOYANCY MAXIMUM	TEMPERATURE RANGE (Min/Max)	CERTIFICATES	TREKPAK™	PADDED DIVIDERS	RUBBERISED HANDLES	PANEL FRAMES	PERSONALISED NAMEPLATE	LID ORGANISER	WHEELS	COLOURS	CAT. NO.
iM2050	24.1 x 19.1 x 10.8 cm	30 x 24.9 x 11.9 cm	3.8 cm	7 cm	1.36 kg	1.22 kg	7.57 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							■ ■ ■	iM2050	
iM2075	24.1 x 19.1 x 18.4 cm	30 x 24.9 x 19.6 cm	3.8 cm	14.6 cm	1.68 kg	1.5 kg	12.9 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							■ ■ ■ ■ ■	iM2075	
iM2100	33 x 23.4 x 15.2 cm	36.1 x 29 x 16.5 cm	5.1 cm	10.2 cm	2.22 kg	1.91 kg	15.34 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C		0					■ ■ ■	iM2100	

MEDIUM CASES

CAT. NO.	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	LID DEPTH	BOTTOM DEPTH	WEIGHT WITH FOAM	WEIGHT WITHOUT FOAM	BUOYANCY MAXIMUM	TEMPERATURE RANGE (Min/Max)	CERTIFICATES	TREKPAK™	PADDED DIVIDERS	RUBBERISED HANDLES	PANEL FRAMES	PERSONALISED NAMEPLATE	LID ORGANISER	WHEELS	COLOURS	CAT. NO.
iM2275	35.9 x 33.5 x 25.1 cm	38.7 x 39.4 x 26 cm	8.1 cm	16 cm	4.65 kg	3.63 kg	31.2 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0					■	iM2275	
iM2200	38.1 x 26.7 x 15.2 cm	41.1 x 32.3 x 16.8 cm	5.1 cm	10.2 cm	2.77 kg	2.22 kg	20.03 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0	0				■ ■	iM2200	
iM2306	43.2 x 16 x 15.7 cm	46.2 x 21.3 x 17 cm	5.1 cm	10.7 cm	2.13 kg	1.95 kg	14.84 kg	-29 / 60° C	IP67		0	0				■ ■ ■	iM2306	
iM2300	43.2 x 29.7 x 15.7 cm	46.2 x 35.3 x 17 cm	5.1 cm	10.7 cm	3.22 kg	2.68 kg	24.15 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0	0	0			■ ■ ■ ■ ■	iM2300	
iM2400	45.7 x 33 x 17 cm	48.8 x 38.6 x 18.5 cm	5.1 cm	11.9 cm	3.54 kg	2.95 kg	31.96 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0	0				■ ■ ■ ■	iM2400	
iM2450	45.7 x 33 x 21.3 cm	48.8 x 38.6 x 22.9 cm	5.1 cm	16.3 cm	4.04 kg	3.36 kg	28.86 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0						■ ■ ■ ■	iM2450	
iM2600	50.8 x 35.6 x 19.6 cm	53.8 x 40.6 x 21.1 cm	5.1 cm	14.5 cm	5.26 kg	3.86 kg	42.28 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0	0				■ ■ ■ ■	iM2600	
iM2620	50.8 x 35.6 x 25.4 cm	53.8 x 40.6 x 26.9 cm	5.1 cm	20.3 cm	6.58 kg	5.67 kg	58.93 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0				S		■ ■ ■ ■	iM2620	
iM2500	52.1 x 29.2 x 18.3 cm	55.1 x 35.8 x 22.6 cm	5.1 cm	13.2 cm	6.21 kg	5.03 kg	39.64 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0		0	S		■ ■ ■ ■	iM2500	

LAPTOP CASES

CAT. NO.	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	LID DEPTH	BOTTOM DEPTH	WEIGHT WITH FOAM	WEIGHT WITHOUT FOAM	BUOYANCY MAXIMUM	TEMPERATURE RANGE (Min/Max)	CERTIFICATES	TREKPAK™	PADDED DIVIDERS	RUBBERISED HANDLES	PANEL FRAMES	PERSONALISED NAMEPLATE	LID ORGANISER	WHEELS	COLOURS	CAT. NO.
iM2435	44.5 x 16.5 x 39.4 cm	47.3 x 23.5 x 41.9 cm	5.1 cm	34.3 cm	5.06 kg	4.54 kg	31.98 kg	-29 / 60° C	IP67	0			0	S		■	iM2435	
iM2370	46.2 x 30.7 x 13.2 cm	50.8 x 37.3 x 14.7 cm	4.3 cm	8.9 cm	3.27 kg	2.59 kg	19.8 kg	-29 / 60° C	IP67	0			0			■ ■	iM2370	

STORM CASE™
COLOURS AVAILABLE



S = Standard feature | O = Optional accessory

* These colours are available upon minimum quantities, as well as other configurations. Check with your Customer Service representative for further details.

LARGE CASES

CAT. NO.	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	LID DEPTH	BOTTOM DEPTH	WEIGHT WITH FOAM	WEIGHT WITHOUT FOAM	BUOYANCY MAXIMUM	TEMPERATURE RANGE (Min/Max)	CERTIFICATES	TREKPAK™	PADDED DIVIDERS	RUBBERISED HANDLES	PANEL FRAMES	PERSONALISED NAMEPLATE	LID ORGANISER	WHEELS	COLOURS	CAT. NO.
iM2700	55.9 x 43.2 x 20.3 cm	62.5 x 50 x 21.8 cm	5.1 cm	15.2 cm	6.53 kg	5.03 kg	63.27 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0						■ ■ ■	iM2700	
iM2720	55.9 x 43.2 x 25.4 cm	62.5 x 50 x 29.7 cm	5.1 cm	20.3 cm	9.98 kg	7.62 kg	85.3 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0						S ■ ■ ■	iM2720	
iM2750	55.9 x 43.2 x 32.3 cm	62.5 x 50 x 36.6 cm	5.1 cm	27.2 cm	10.61 kg	8.39 kg	105.97 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM2750	
iM2875	57.2 x 53.6 x 29 cm	63.2 x 60.2 x 33.3 cm	5.1 cm	23.9 cm	11.16 kg	9.12 kg	117.58 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C			0				S ■ ■ ■	iM2875	
iM2950	73.7 x 45.7 x 26.7 cm	79.5 x 51.8 x 31 cm	5.1 cm	21.6 cm	13.02 kg	9.43 kg	118.23 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0	0					S ■ ■ ■	iM2950	
iM2975	73.7 x 45.7 x 35.1 cm	79.5 x 51.8 x 39.4 cm	5.1 cm	30 cm	13.38 kg	10.34 kg	150.94 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM2975	
iM3075	75.7 x 52.8 x 45.2 cm	84.6 x 62 x 49 cm	10.2 cm	34.9 cm	20.41 kg	14.29 kg	240.81 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C	0			0	S		■ ■ ■	iM3075	

LONG CASES

CAT. NO.	INTERIOR DIMENSIONS	EXTERIOR DIMENSIONS	LID DEPTH	BOTTOM DEPTH	WEIGHT WITH FOAM	WEIGHT WITHOUT FOAM	BUOYANCY MAXIMUM	TEMPERATURE RANGE (Min/Max)	CERTIFICATES	TREKPAK™	PADDED DIVIDERS	RUBBERISED HANDLES	PANEL FRAMES	PERSONALISED NAMEPLATE	LID ORGANISER	WHEELS	COLOURS	CAT. NO.
iM3100	92.7 x 35.6 x 15.2 cm	101.1 x 41.9 x 17 cm	5.1 cm	10.2 cm	8.98 kg	6.89 kg	64.67 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM3100	
iM3200	111.8 x 35.6 x 15.2 cm	119.9 x 41.9 x 17 cm	5.1 cm	10.2 cm	9.57 kg	8.03 kg	77.48 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM3200	
iM3220	111.8 x 35.6 x 21.6 cm	119.9 x 41.9 x 23.4 cm	5.1 cm	16.5 cm	11.25 kg	9.25 kg	108.17 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM3220	
iM3300	128.3 x 35.6 x 15.2 cm	136.7 x 41.9 x 17 cm	5.1 cm	10.2 cm	10.43 kg	8.66 kg	88.85 kg	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM3300	
iM3410	138.4 x 25.4 x 15.2 cm	146.7 x 32.3 x 16.9 cm	5.1 cm	10.2 cm	9.1 kg	8.2 kg	N/A	-29 / 60° C	IP67 • MIL-STD-810F • ATA 300 • FED-STD-101C							S ■ ■ ■	iM3410	

STORM CASE™
COLOURS AVAILABLE



S = Standard feature | O = Optional accessory

* These colours are available upon minimum quantities, as well as other configurations. Check with your Customer Service representative for further details.



PICK N PLUCK™ FOAM

An easy, do-it-yourself system for the interior of the case. Layers of foam are pre-scored in 1,27 cm or 2,54 cm cubes. Simply lay your equipment on the foam, tape or chalk to mark the foam, and pluck away. Always allow at least 2,5 cm of foam between your equipment and the case wall.

The following cases ship with solid foam instead of Pick N Pluck™ Foam: iM3100, iM3200, iM3220, iM3300, iM3410.



PADDED DIVIDERS

An alternative to Peli foam is our optional Padded Divider Sets. The compartments are connected with Velcro® so you can easily change the configuration according to your needs.


CASE	LAYERS	DIVIDER SET ONLY
iM2200	1	iM2200-DIV
iM2300	1	iM2300-DIV
iM2306	1	iM2306-DIV
iM2370	1	iM2370-DIV
iM2435	1	iM2435-DIV-LIDORG
iM2450	1	iM2450-DIV
iM2500	1	iM2500-DIV
iM2600	1	iM2600-DIV
iM2700	1	iM2700-DIV
iM2950	1	iM2950-DIV
iM3075	2	iM3075-DIV



TREKPAK™ DIVIDERS

The TrekPak™ system uses pre-installed wall sections, divider panels, locking pins and an infallible cutting tool. Just lay your gear in the case, measure and cut the divider sections and lock them in place with the steel U-pins.

TrekPak™ is available for the following models: iM2200, iM2275, iM2300, iM2400, iM2450, iM2500, iM2600, iM2620, iM2720, iM2950

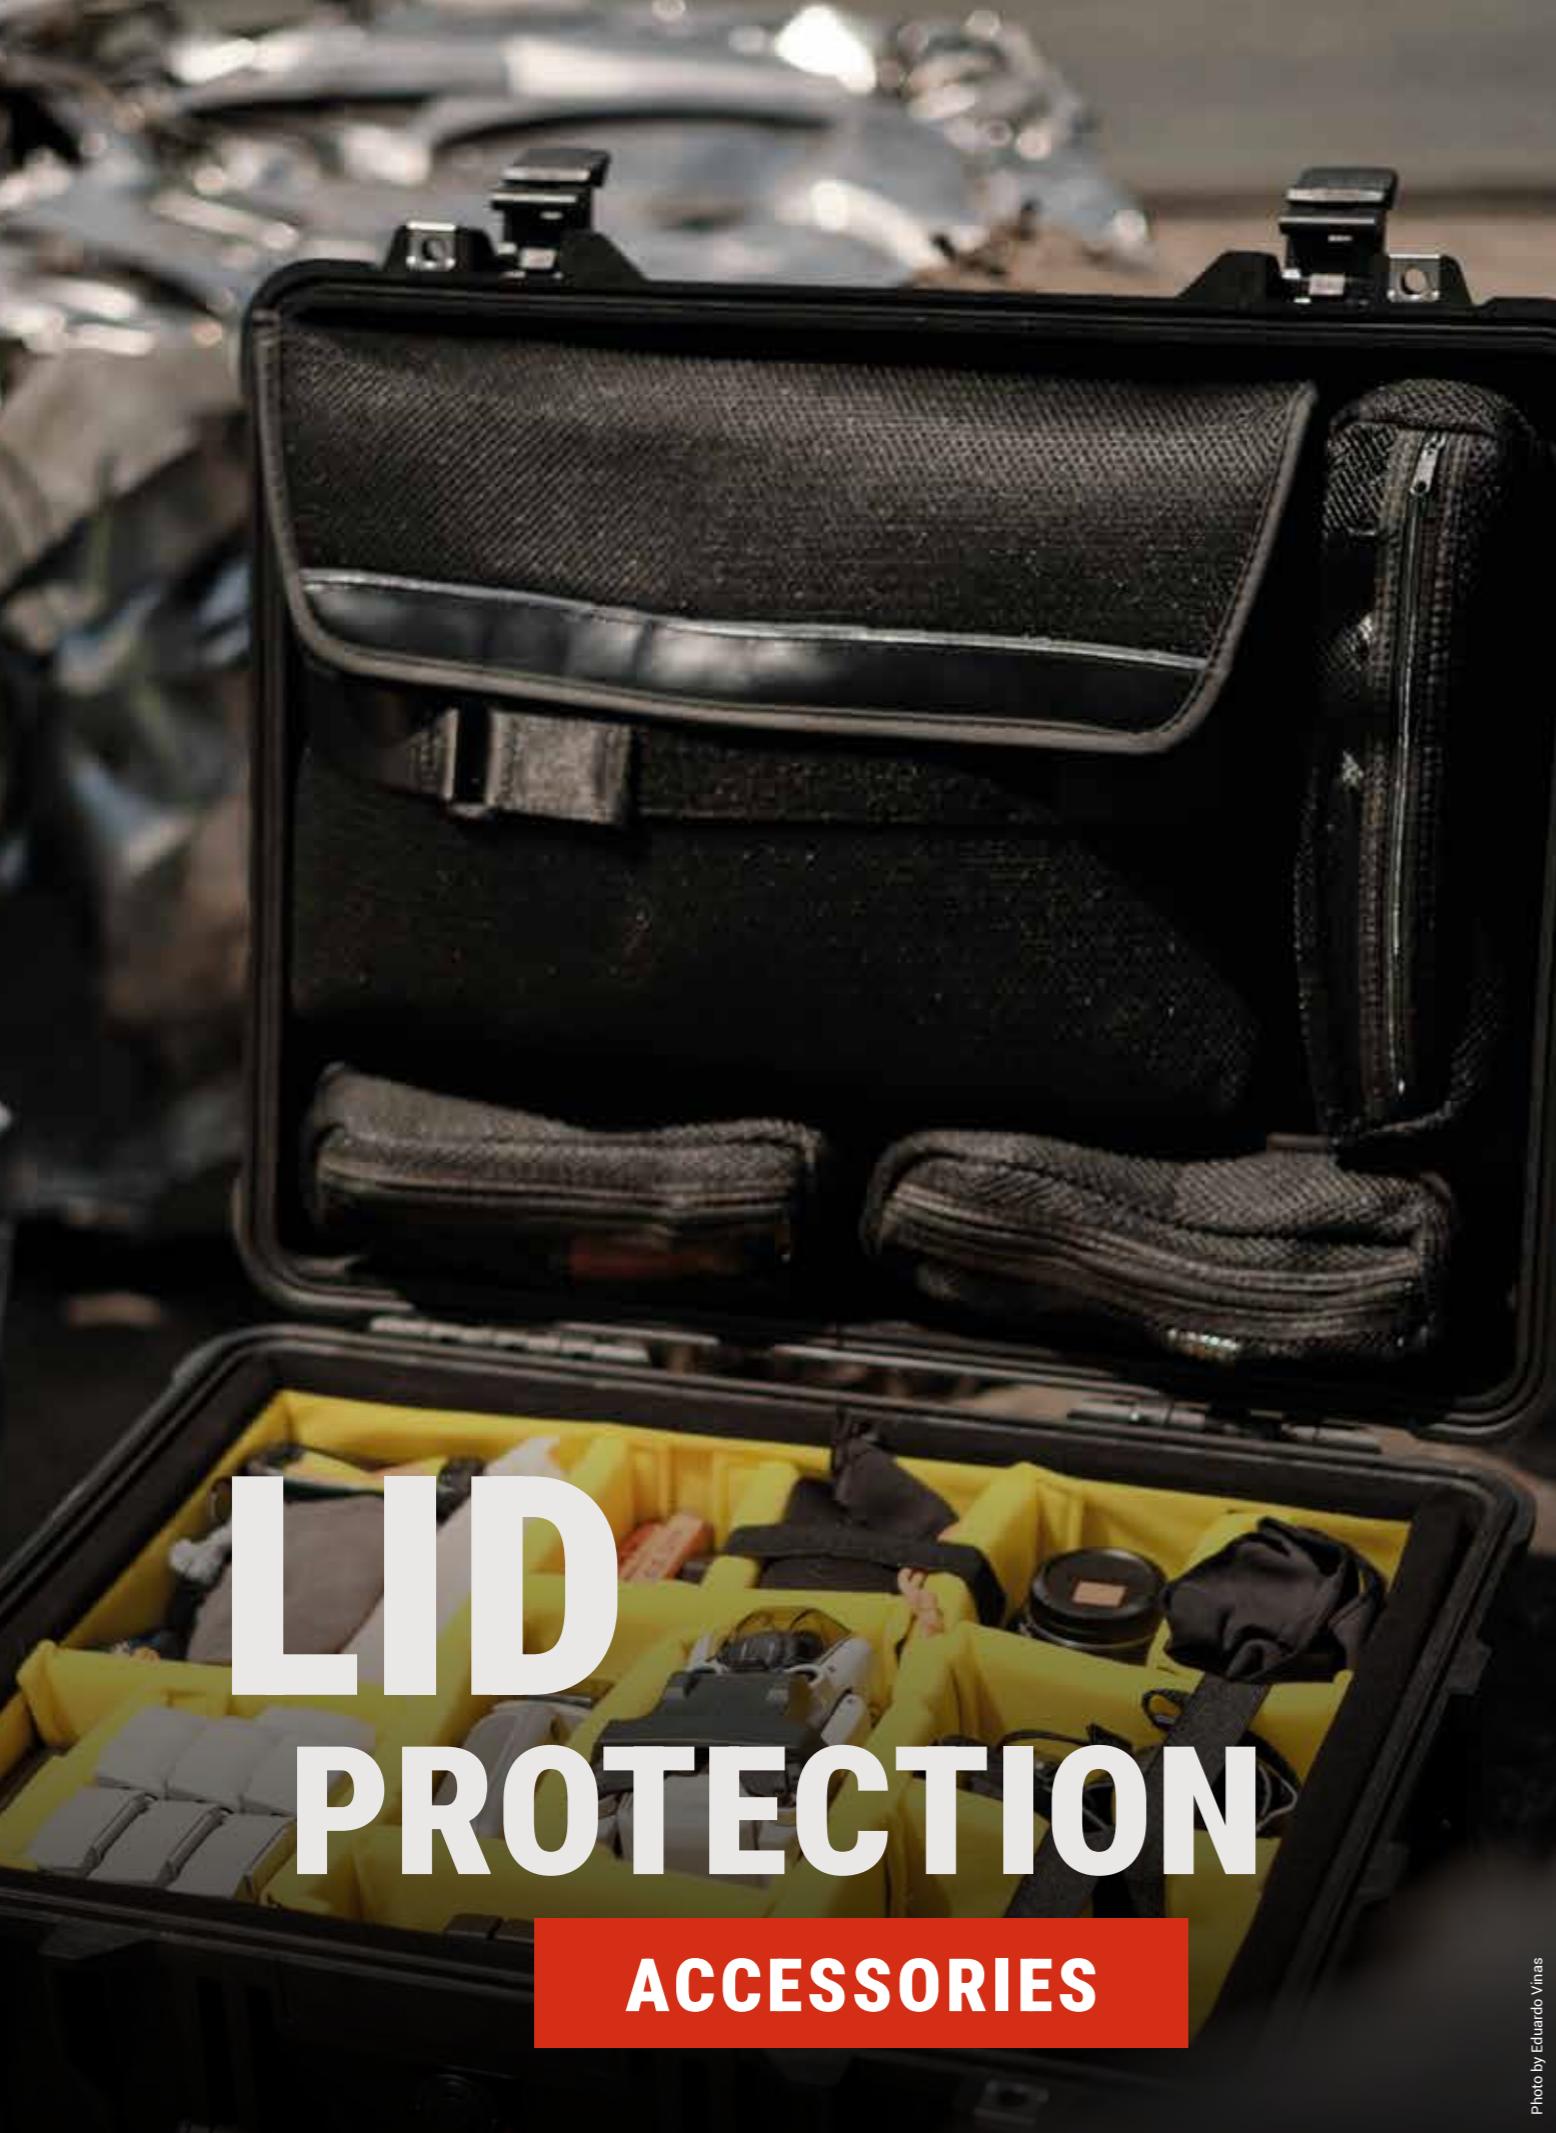

LID ORGANISERS

Made of simulated leather or ballistic nylon with nylon zippers. A wide variety of pocket sizes protect and keep your gear organised. They install easily with Velcro® strips (included).

CASE	PHOTOGRAPHER'S ORGANISER	LID ORGANISER	UTILITY ORGANISER
iM2300	iM24XX-PHOTOPALLET	iM2300-LIDORG	
iM2370			iM2370-UTILITYORG
iM2400	iM24XX-PHOTOPALLET	iM24XX-LIDORG	
iM2435	iM24XX-PHOTOPALLET	iM2435-DIV-LIDORG	
iM2450	iM24XX-PHOTOPALLET	iM24XX-LIDORG	
iM2500			iM2500-UTILITYORG
iM2600		iM26XX-LIDORG	iM26XX-UTILITYORG
iM2620		iM26XX-LIDORG	iM26XX-UTILITYORG
iM2700			iM27XX-UTILITYORG
iM2720			iM27XX-UTILITYORG
iM2750			iM27XX-UTILITYORG
iM2875			iM2875-UTILITYORG
iM2950			iM29XX-UTILITYORG
iM2975			iM29XX-UTILITYORG
iM3075			iM3075-UTILITYORG

Present an array of compartments including an assortment of elastic strapping and mesh nylon zipper pockets to house, protect, and organise your gear.

Are styled with deep expandable folder pockets and sleeves for various office attache style components.

Offer various folder pockets, sleeves, and include a vast array of mesh nylon zipper pockets to house, protect, and organise gear.

Lid Organisers are installed with Velcro® (included)

OTHER ACCESSORIES



TSA LOCK



REPLACEMENT O-RING



SHOULDER STRAPS



LID STAYS



PELI DESICCANT
(SILICA GEL)



UTILITY ORGANISER



BEZEL KITS



REPLACEMENT FOAM



Check how to install all
accessories through our easy
step-by-step Tutorial videos

Refer to www.peli.com for specific accessories available for each case model

SPECIAL APPLICATIONS



CUSTOM FOAM SOLUTIONS

Custom foam and extreme solutions such as deck mount suspension systems will keep your delicate items protected on the inside.



BEZEL KITS

Many Peli Storm cases can be adapted for use with electronic interface panels by using a Bezel Kit. Pre-drilled holes and stainless steel screws make fabricating a custom case a fast and accurate proposition.

A polymer o-ring seals the panel so the base of the case remains watertight, even with the lid open.



- O-ring
- Bezel Kit
- Attachment Hardware



ELECTRONIC INSTALLATIONS


Peli™ Storm Case allows customisation for electronics. The copolymer material can be machined, drilled and sanded smooth. This makes the Peli™ Storm Case suitable for use with bulkhead connectors.

Peli™ Case shown. This picture only serves to illustrate the application.



WE CUSTOMISE YOUR LOGO

Personalise your case with your company logo or have your name engraved on the nameplate. Logos can be applied in multiple colours as a Mylar® decal or as a vibrant fade-resistant, scratch-resistant hot-stamped ink.

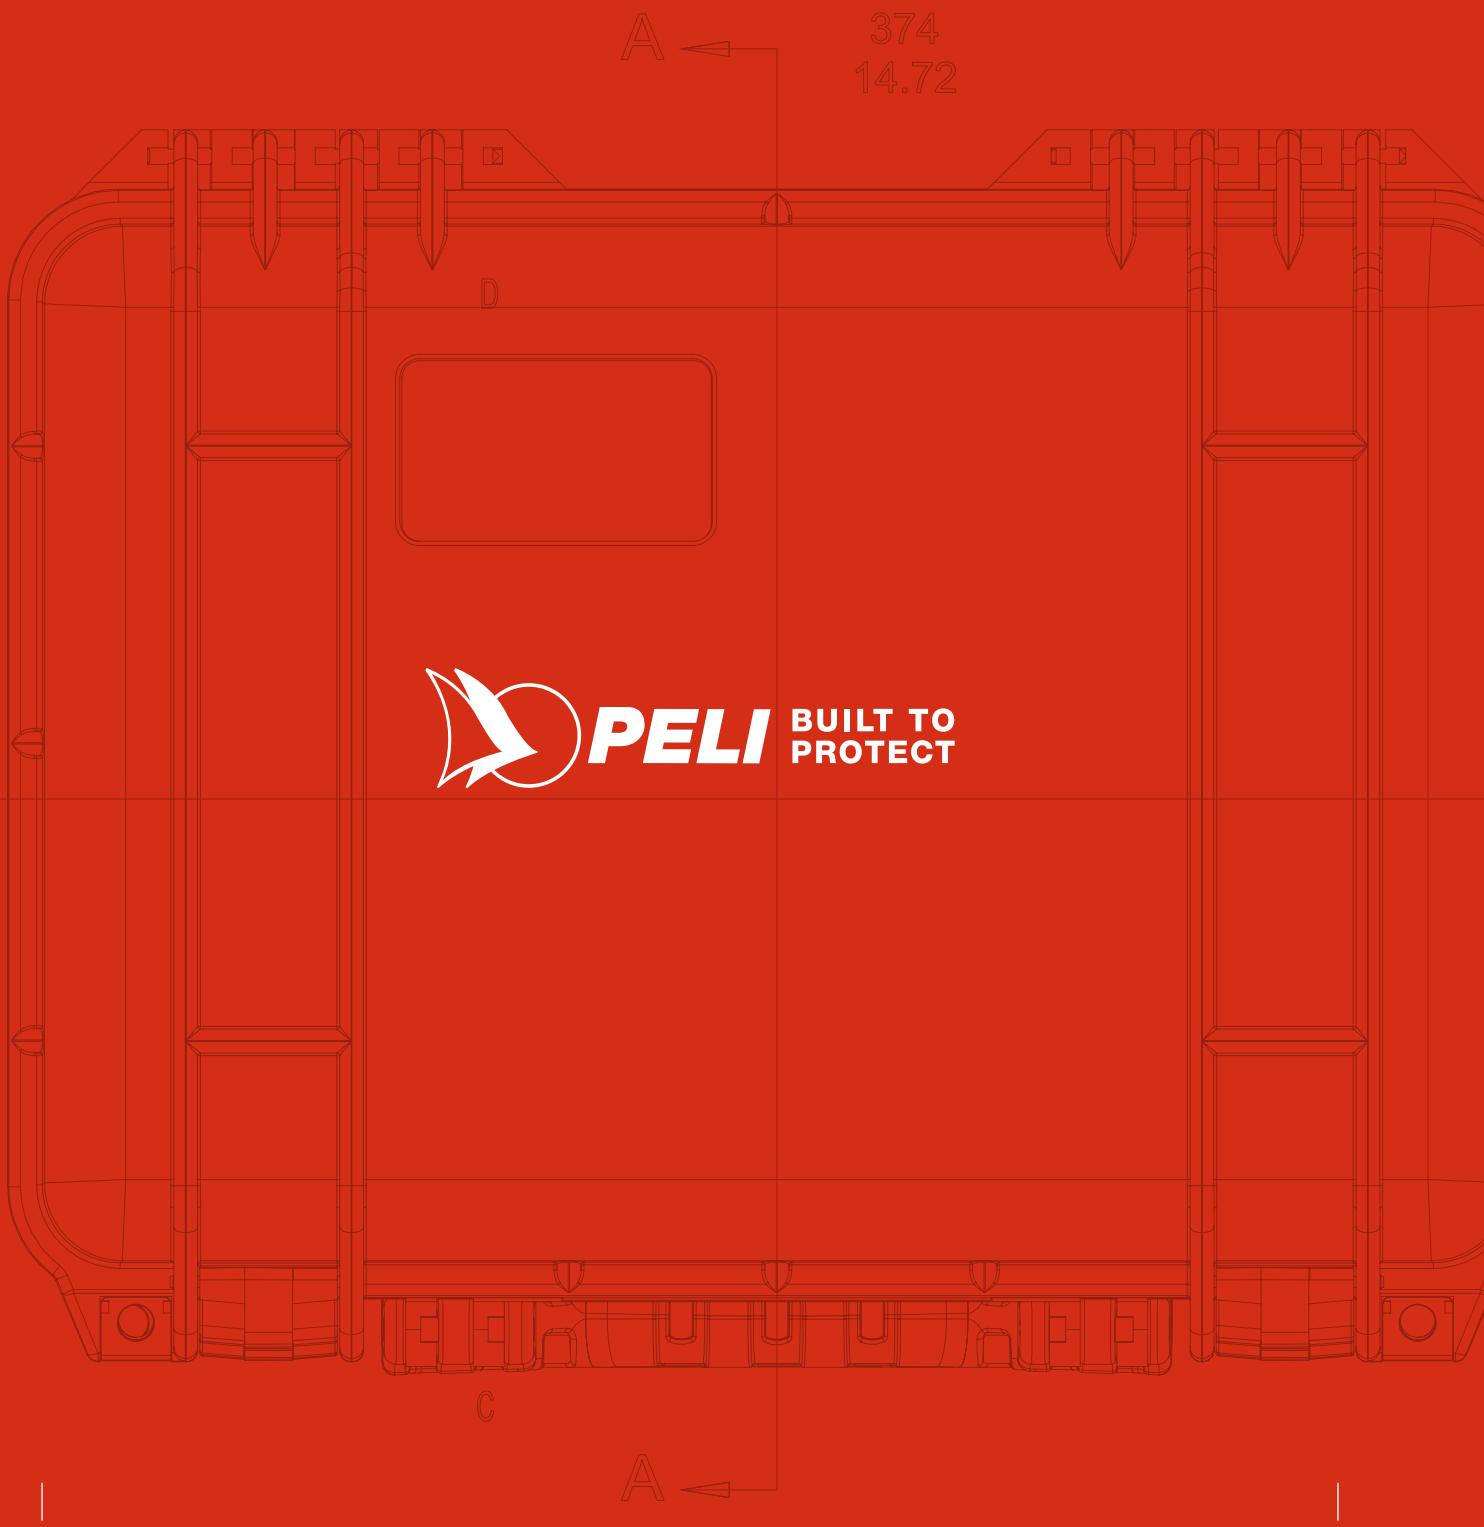

PELI BUILT TO
PROTECT

EMEA HEADQUARTERS
PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 6
08025 Barcelona • Spain
Tel +34 934 674 999

PELI PRODUCTS
FRANCE S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris • France
Tel +33 (0)1 44 83 95 63

PELI PRODUCTS
GERMANY GmbH
Neudorfer Strasse 285 C
09474 Crottendorf • Germany
Tel +49 (0)37344 313999

©2025 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its parent, subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com.
Part No. 0030-000-101E JUL 25

[381.5]

15.62