




Vonk B.V.
Voorstraat 41
3265 BT PERSHIL

Tel. +31-(0)88-0330300
info@vonkbv.com
www.vonkbv.com

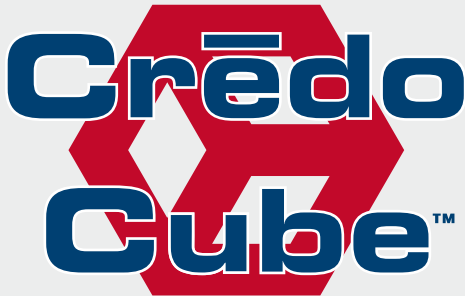

CRĒDO CUBE™ SERIES 22

Superior thermal protection in a convenient mid-size container.

The Crēdo Cube™ is a passive and reusable shipper qualified to hold chilled medical materials at a safe temperature for up to five days. This system is ideal for reducing shipping costs or for circumstances in which unexpected delays may occur.

Modular TIC™ (Thermal Isolation Chamber) walls with integrated PCM (Phase-Change Material) and VIPs (Vacuum Insulated Panels) makes conditioning in a freezer for year-round shipping easy and allows effortless packing and storage.

WHY CHOOSE CRĒDO™ SYSTEMS?

- The most trusted and well recognised brand of high-performance reusable shippers with the largest number of sizes and temperature ranges available
- Unique TIC™ walls contain PCM and completely enclose the temperature-sensitive payload ensuring consistently stable performance
- Crēdo™ shippers are highly durable, lightweight, and provide an optimum volume ratio of interior payload space for your products - allowing you to ship more product in fewer containers, reducing distribution costs



ENHANCE YOUR CRĒDO™ SYSTEMS

- **Crēdo ProEnvision™**: Easy-to-use, secure, web-based asset tracking software and global service centers available to assist customers and maximise their return on investment
- **TIC™ Smart Indicator**: Optional temperature-sensitive label installation specifying an “at a glance” safe temperature reading

CRĒDO CUBE™

DURATION

96 - 144 Hours

SERIES 22 CONTROLLED

(15°C to 25°C)

VOLUME

3L, 4L, 8L, 10L, 12L, 16L,
28L, 42L, 56L

SERIES 22 UNIVERSAL

(15°C to 25°C)

VOLUME

9L, 24L, 49L

CRĒDO CUBE™ SERIES 22 CONTROLLED & UNIVERSAL

Controlled

Single PCM TICs designed for trips in controlled shipping lanes with reliable certainty of temperature during the trip duration.

Universal

Double-bracketed PCM TICs specially designed for trips in shipping lanes with a variety of temperatures, such as seasons with large changes in warm or cool conditions or trips across the Equator.



CRĒDO™ SERIES 22 CONTROLLED 15°C TO 25°C

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Tare Weight - kg
Single Wall VIP, White Plastic Outer			
3L	318 x 267 x 279	130 x 130 x 130	6
4L	318 x 267 x 279	150 x 150 x 150	5
8L	445 x 286 x 292	282 x 165 x 165	8
10L	381 x 343 x 349	216 x 216 x 216	11
12L	381 x 343 x 349	226 x 226 x 226	10
16L	419 x 375 x 381	254 x 254 x 254	11
28L	457 x 419 x 432	305 x 305 x 305	16
42L	616 x 419 x 432	457 x 305 x 305	21
Single Wall VIP, Kraft Box			
56L	540 x 495 x 502	381 x 381 x 381	24
Nested VIP, White Plastic Outer			
4L	381 x 343 x 349	150 x 150 x 150	9
12L	457 x 419 x 432	226 x 226 x 226	16
Nested VIP, Kraft Box			
28L	540 x 495 x 502	305 x 305 x 305	25
Double Wall VIP, White Plastic Outer			
16L	464 x 432 x 445	254 x 254 x 254	17
Foam, White Plastic Outer			
12L	432 x 387 x 413	226 x 226 x 226	9

CRĒDO™ SERIES 22 UNIVERSAL 15°C TO 25°C

Payload Size	Exterior Dimensions - mm	Interior Dimensions - mm	Tare Weight - kg
Single Wall VIP, White Plastic Outer			
9L	381 x 343 x 349	206 x 206 x 206	11
24L	457 x 419 x 432	291 x 291 x 291	19
49L	540 x 495 x 502	366 x 366 x 366	27

Superior Performance
ensuring complete
product integrity

Small and Light
significantly reducing
distribution costs

**Crêdo ProEnvision™ and
Service Centers**
support reclamation
and re-use

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crêdo™, Crêdo Cube™, Crêdo ProEnvision™, Crêdo Xtreme™, Crêdo DURACUBE™, Crêdo ProMed™, Sherpa™ Systems, Chronos™ Express, Chronos™ Advance and CoolPall™ Vertos are registered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.



©2017 PELI BioThermal all rights reserved.